

LED FIXTURE

SSL Series



Head tilts to 20 degree

Full Cutoff LED Slim Wall Pack SSL-WP2

Enhanced LED performance in a classic design, offers maximum light output for general purpose area and security lighting, efficiently deliver lumens, and consume less energy than traditional wall mount technologies.



Features & Benefits

CUL listed, DLC	Type III light distribution is available
Available with lumen outputs from 3,000 to 10,500 lumens	Junction box or wall mounted directly
LM-80 certified high performance and reliable lumileds LEDs	CRI≥70, L70 @ 50,000 Hrs
Die-cast aluminum housing with dark bronze coat finish, head can be tilted design	Voltage 120-277V, 120V photocell sensor installed
Wet location rated	

Warranty

5-year limited warranty in commercial use from the date of purchase
 Operating temperature range between -40°C and +40°C


Product Specification

Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3664107	Y	SSL-WP2/30W/50/UNV/DB/PS1	30W LED Slim Wall Pack, 50K, 120V, Dark Bronze with photocell sensor	30	120	50,000	TYPE III	3000	5000K	70	8.96 x 6.77 x 4.13	6
3665115	Y	SSL-WP2/40W/50/UNV/DB/PS1	40W LED Slim Wall Pack, 50K, 120V, Dark Bronze with photocell sensor	40	120	50,000	TYPE III	4500	5000K	70	8.96 x 6.77 x 4.13	6
3666112	Y	SSL-WP2/70W/50/UNV/DB/PS1	70W LED Slim Wall Pack, 50K, 120V, Dark Bronze with photocell sensor	70	120	50,000	TYPE III	7800	5000K	70	12.99 x 10.16 x 5.17	1
3666113	Y	SSL-WP2/90W/50/UNV/DB/PS1	90W LED Slim Wall Pack, 50K, 120V, Dark Bronze with photocell sensor	90	120	50,000	TYPE III	10500	5000K	70	12.99 x 10.16 x 5.17	1

Applications

Security, pathway and perimeter lighting Building entryways and walkways

Dimensional drawing

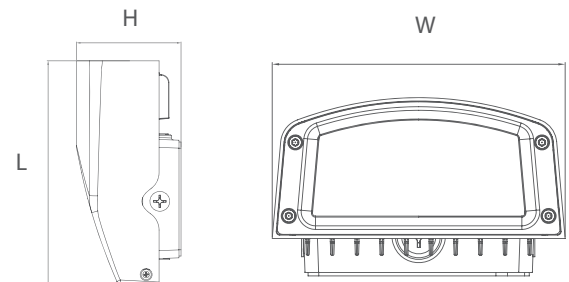

Ordering Information

Example: SSL-WP2/30W/50/UNV/DB/PS1

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Options
SSL (Solid State Lighting)	WP2 (Full Cutoff Slim Wall Pack)	90W, 70W 40W, 30W	50 (5000K)	UNV (120-277V)	DB (Dark Bronze)	PS1 (Photocell Sensor)