
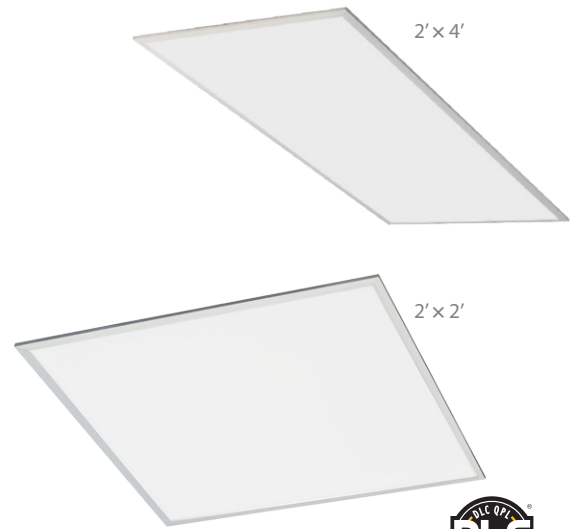


LED FIXTURE

RIGID Series

LED Flat Panel PRO-FP


Ultra Slim LED Flat Panel Luminaire

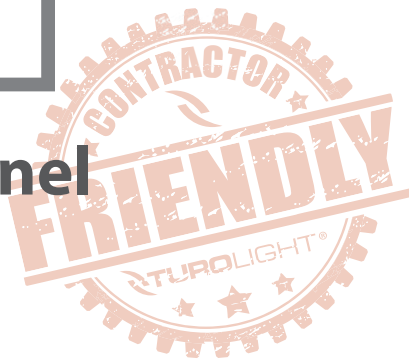

Features & Benefits

CETL listed, DLC*
CRI >80
Ultra slim design, no UV & IR emission
2 Convenient sizes
120-277V LED Driver, PF >0.95
L80 @ 50,000 Hrs
Large wiring box

0-10V Dimmable
Aluminum frame, PMMA Opal lens
120° Beam spread
Excellent illuminating surface uniformity
IP40 / IK05



Clip For recessed grid ceiling installations, our 4 mounting clips may be used to securely mount the RGD-FP luminaire to the T-Bar frame or as to act as suspension points.

Warranty


5-year limited warranty in commercial use from the date of purchase
Operating temperature range between -20°C and +60°C

Applications

Commercial/ Industrial/ Retail location
 For use in Offices, Stores, Bank, Airport, Show-room, Restaurant etc.
 Installation suspension/ surface mounted/ recessed drywall & T-Bar applicable

* DLC under qualifying process Q3, 2019

Dimensional drawing

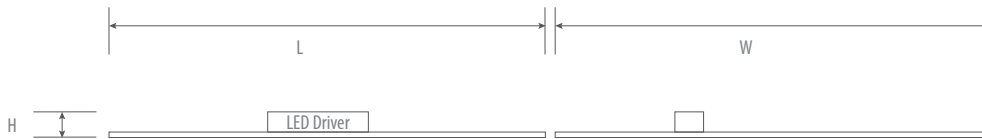

	L	W	H
2'x2'	23 3/4"	23 3/4"	2"
2'x4'	23 3/4"	47 3/4"	2"

Ordering Information Example: PRO-FP/22/40W/10/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable
PRO	FP (Flat Panel)	22 (2'x2') 24 (2'x4')	40W 50W	40 (4000K)	UNV (120-277V)	D (0-10V Dim)

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3665146	Yes	PRO-FP/22/40W/40/UNV/D	40	120-277V	50,000	4,000	4000	>80	24X24	2
3665147	Yes	PRO-FP/24/50W/40/UNV/D	50	120-277V	50,000	5,000	4000	>80	24X48	1
3660019		RGD-FP/22/FRM/WH	RIGID Flat Panel Surface Mount Frame 2'x2', White							8
3660021		RGD-FP/24/FRM/WH	RIGID Flat Panel Surface Mount Frame 2'x4', White							8
3660023		RGD-FP/SUSP/ACC	RIGID Flat Panel Air Craft Cable Suspension							50