

# LED FIXTURE

**RIGID Series**



## LED Flush Mount (PC) RGD-FM/PC

Traditional and eye-catching design  
Deliver maximum light levels, ideal for low ceilings



5-year limited warranty


Operating temperature range -20° C ~ +40° C



### Features & Benefits

- cETLus listed, Energy Star rated
- PMMA diffuser, white finish, size 13" and 19" available
- Multiple Wattage & CCT
- CRI >80 (CRI 90 for 13" MW), 120° beam spread
- TRIAC dimmable down to 10%
- L70 @ 50,000 hrs
- Damp location rated

### Dimensional Drawing

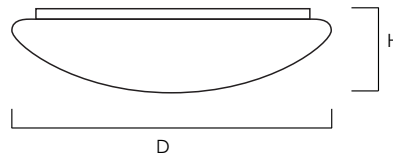

	M.O.D.	M.O.H.
<b>RGD-FM13</b>	13"	3.44"
<b>RGD-FM19</b>	19"	3.44"

### Ordering Information Example: RGD-FM13/18W/30/D/PC

Family Name	Fixture Type	Wattage	CCT	Dimmable	Body
RGD (Rigid)	FM13 (Flush mount, 13", PC) FM19 (Flush mount, 19", PC)	18W MW (Multiple wattage)	30 (3000K) 40 (4000K) MK (Multiple kelvin/CCT)	D (Dimmable)	PC (Polycarbonate)

### Product Specification

Ordering Code	Energy Star	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lm)	CCT (K)	CRI	Damp Location	M.O.D. (inch)	Case QTY.
3663114	Y	RGD-FM13/18W/30/D/PC	LED flush mount 13" 18W 3000K PC	18	120	50,000	1300	3000	80	Y	13	6
3663115	Y	RGD-FM13/18W/40/D/PC	LED flush mount 13" 18W 4000K PC	18	120	50,000	1300	4000	80	Y	13	6
3680362	Y	RGD-FM13/MW/MK/D/PC	LED flush mount 13" 22-18-15W, 30-40-50K, PC	22-18-15	120	50,000	1600-1300-1090	30-40-50	90	Y	13	6
3660194	Y	RGD-FM19/MW/MK/D/PC	LED flush mount 19" 32-28-24W, 30-40-50K, PC	32-28-24	120	50,000	2300-2000-1700	30-40-50	80	Y	19	2