

# Installation Instruction

## LED Post Top

Applicable models:  
EDA-PT/DB/T5/75M

### Installation steps :

#### Cautions:

1. Can not use the electric generator to test the LED light.
2. Please abide by related country, regional and local law and regulations when install this fixture.
3. Please turn off the power before installation or maintenance.
4. Proper earth grounding is required to ensure safety.
5. Make the lighting facing downward vertically after installation.


#### Notice:

1. To avoid possibility of electrical shock or fire, the installation personnel must have professional electric knowledge.
2. Please wear gloves to avoid injury before installation.
3. If any smoke or spark of the wire happened, please turn off the power immediately and notify relevant personnel.


#### Attention:

1. Please check if there is any damage during shipping. If so, please contact manufacturer timely.
2. Please read the installation instruction carefully to check whether all the accessories are complete. After confirmation, Install the fixture according to installation steps.

1. Rotate the light body 90 degree to make sure light facing downward. (Figure 1)
2. Tighten screws on both sides of the bracket to fix the light body. Installation is finished when the light body is fixed without shaking. (Figure 2)
3. Loosen the screws by wrench. (Figure 3)
4. Connect the light to utility power according to the wiring standard, and make sure there is a good joint protective measures. (Figure 4)
5. Install the light to the pole, adjust the viewing angle, then tighten the screw by wrench. (Figure 5)

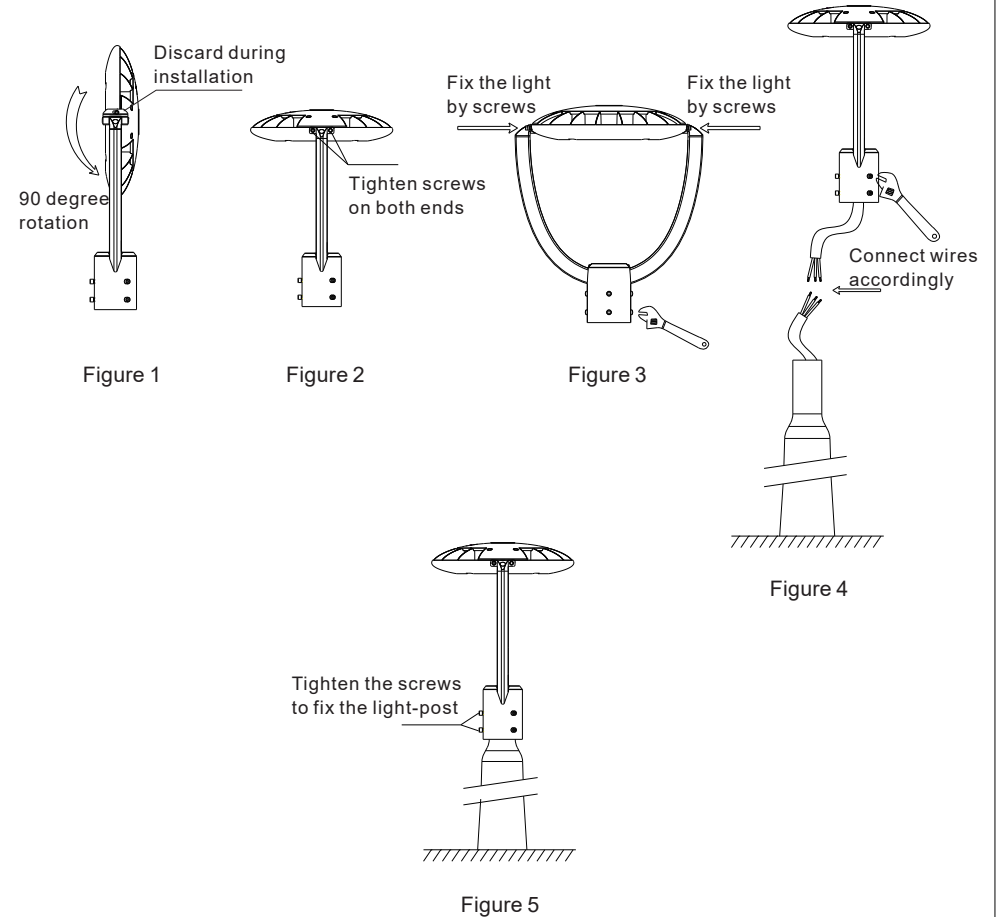


### Wiring Diagram & Mounting Condition Diagram:

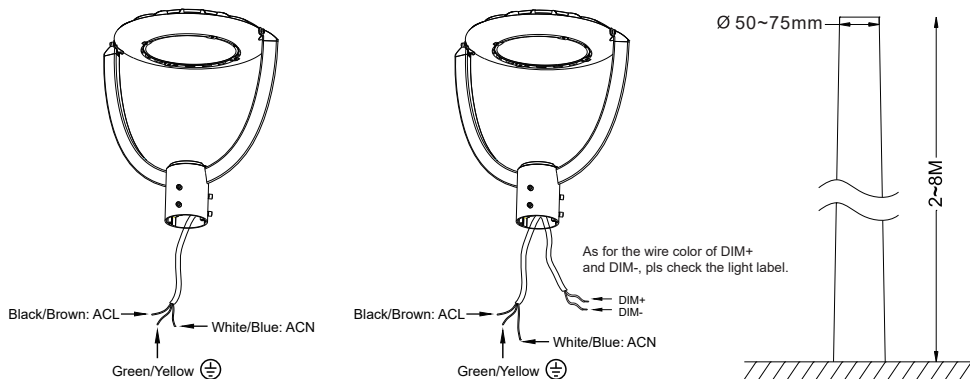

## Instructions for Photocell

When the photocell function is required, photocell should be installed on the back of light; When it's not required, shorting cap should be installed on the back of light.





### CCT and Wattage adjustment under Top Cover:

Open top cover to wattage adjustable knob,

1. 1 stands for 100% power 75 W, and 2, and 3, stand for 60W, and 40W.

2. Move the switch left and right to get the desired color temperature.

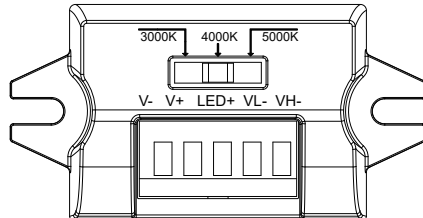

### WARNING / AVERTISSEMENT

#### MIN 75°C SUPPLY CONDUCTOR

**THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.**

#### LES FILS D'ALIMENTATION 75°C MIN

**CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNAÎT BIEN LE PRODUIT ET SON FONCTIONNEMENT AINSI QUE LES RISQUES INHÉRENTS.**