

# LED FIXTURE

DL Series




## LED Wrap Around DL-WA1, WA2, WA3

WA1 ( 4' wrap light), WA2 ( 2' / 4' hinged wrap light)  
WA3 ( 4' Eco-wrap light), newly added 120-347V auto-sensing driver



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C

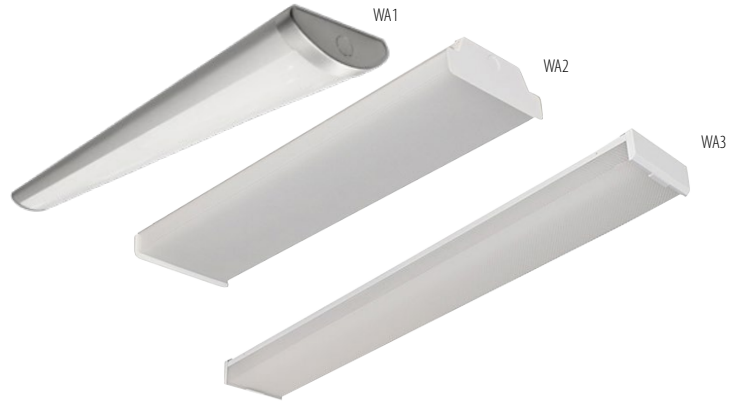


### Features & Benefits

- cUL listed, DLC(Premium)\*
- 0-10V dimmable\*, L70 @ \*
- Wall or ceiling mounted
- PMMA Lens
- Shallow profile, excellent for low ceilings applications
- Damp location rated, High CRI (80+)

\* For applicable models, see product specification below

### Dimensional Drawing

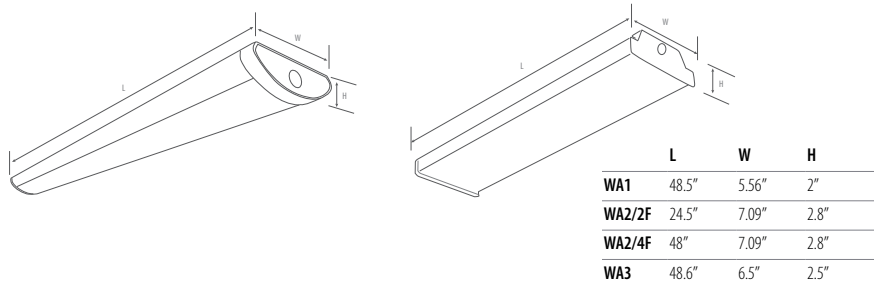

### Ordering Information Example: DL-WA2/4F/40W/40/UNV/D/EM

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Options
DL (Deltalum)	WA1	2F (2')	25W	30 (3000K)	UNV (120-277V) 120-347V	D (Dimmable) Blank (Non-dimmable)	S (Microwave sensor) EM(Emergency battery)
	WA2	4F (4')	40W	35 (3500K)			
	WA3		42W	40 (4000K) 50 (5000K)			

### Product Specification

Ordering Code	DLC/ DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3665129	-	DL-WA1/4F/40W/30	40	120-277V	50,000	120°	4200	3000	>80	Yes	48.5	4
3665124	-	DL-WA1/4F/40W/40	40	120-277V	50,000	120°	4200	4000	>80	Yes	48.5	4
3665125	-	DL-WA1/4F/40W/50	40	120-277V	50,000	120°	4200	5000	>80	Yes	48.5	4
3664124	DLC-P	DL-WA2/2F/25W/40/UNV/D	25	120-277V	100,000	120°	3275	4000	>80	Yes	24.5	4
3665161	DLC-P	DL-WA2/4F/40W/35/UNV/D	40	120-277V	100,000	120°	5200	3500	>80	Yes	48	4
3665135	DLC-P	DL-WA2/4F/40W/40/UNV/D	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
3665162	-	DL-WA2/4F/40W/35/UNV/D/S	40	120-277V	100,000	120°	5200	3500	>80	Yes	48	4
3665165	-	DL-WA2/4F/40W/40/UNV/D/S	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
-	-	DL-WA2/4F/40W/40/UNV/D/EM	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
3665137	-	DL-WA3/4F/42W/40/UNV	42	120-277V	100,000	120°	4700	4000	>80	Yes	48.6	4
3665138	YES	DL-WA3/4F/42W/50/UNV	42	120-277V	100,000	120°	4704	5000	>80	Yes	48.6	4
3665309	DLC-P	DL-WA3/4F/42W/35/120-347V	42	120-347V	100,000	120°	5460	3500	>80	Yes	48.6	4
3665310	DLC-P	DL-WA3/4F/42W/40/120-347V	42	120-347V	100,000	120°	5502	4000	>80	Yes	48.6	4
3660052	-	DL-WA2/2F/LENS	DeltaLum hinged-wrap light 2ft. Replacement PMMA lens									
3660053	-	DL-WA2/4F/LENS	DeltaLum hinged-wrap light 4ft. Replacement PMMA lens									
3660054	-	DL-WA3/4F/LENS	DeltaLum Eco-wrap light 4ft. Replacement PMMA lens									