

LED FIXTURE

SSL Series



90W~140W



30W~70W

LED Wall Pack

SSL-WP1

Enhanced LED performance in a classic design, offers efficiently deliver lumens, and consume less energy than traditional wall pack MH technologies.



Features & Benefits

CUL listed, DLC	Junction box or wall mounted directly
Available with lumen outputs from 3,400 to 16,400 lumens	CRI≥70, L70 @ 50,000 Hrs
LM-80 certified high performance and reliable lumileds LEDS	Voltage 120-277V/347V
Die-cast aluminum with durable dark bronze coat finish	Photocell Sensor optional
Wet location rated	Wall Pack Reflector optional

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C

Applications

Security, pathway and perimeter lighting, Building entryways and walkways

Product Specification

Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3664110	Y	SSL-WP1/30W/50/UNV/DB	30W Wall Pack, 50K, 100-277V, Dark Bronze	30	100-277	50,000	H110° × V100°	3400	5000K	70	14.21 x 7.40 x 9.25	1
3665108	Y	SSL-WP1/45W/50/UNV/DB	45W Wall Pack, 50K, 100-277V, Dark Bronze	45	100-277	50,000	H110° × V100°	5300	5000K	70	14.21 x 7.40 x 9.25	1
3665202	Y	SSL-WP1/40W/50/347/DB	40W Wall Pack 50K, 347V, Dark Bronze	40	347	50,000	H110° × V100°	4700	5000K	70	14.21 x 7.40 x 9.25	1
3666104	Y	SSL-WP1/70W/50/UNV/DB	70W Wall Pack, 50K, 100-277V, Dark Bronze	70	100-277	50,000	H110° × V100°	8100	5000K	70	14.21 x 7.40 x 9.25	1
3666203	Y	SSL-WP1/60W/50/347/DB	60W Wall Pack, 50K, 347V, Dark Bronze	60	347	50,000	H110° × V100°	7000	5000K	70	14.21 x 7.40 x 9.25	1
3666105	Y	SSL-WP1/90W/50/UNV/DB	90W Wall Pack, 50K, 120-277V, Dark Bronze	90	120-277	50,000	H110° x V90°	11200	5000K	70	18 x 8.75 x 9.75	1
3666210	-	SSL-WP1/95W/50/347/DB	95W Wall Pack, 50K, 347V, Dark Bronze	95	347	50,000	H110° x V90°	8500	5000K	70	18 x 8.75 x 9.75	1
3667102	Y	SSL-WP1/135W/50/UNV/DB	135W Wall Pack, 50K, 120-277V, Dark Bronze	135	120-277	50,000	H110° x V90°	16400	5000K	70	18 x 8.75 x 9.75	1
3667212	Y	SSL-WP1/140W/50/347/DB	140W Wall Pack, 50K, 347V, Dark Bronze	140	347	50,000	H110° x V90°	14450	5000K	70	19 x 8.75 x 9.75	1
3660001		SSL-WP/R/M	LED Wall Pack Reflector Medium 30W-70W									
3660002		SSL-WP/R/L	SSL LED Wall Pack Reflector Large 90W-140W									
3660003		SSL-WPCP/45W/PS	45W Power Supply for Wall Pack & Canopy Light									
3660004		SSL-WPCP/70W/PS	70W Power Supply for Wall Pack & Canopy Light									
3660005		SSL-WP/50W/75W/347/TS SSL-WP/145W/347/TS	347V Transformer Set for 40W & 60W Wall Pack 347V Transformer Set for 95W & 140W Wall Pack									
3660000		LC-105	Photocell Sensor, for Wall Pack 120V application only									
		AA-1068M, JL-403C	Photocell Sensor, for Wall Pack 277V & 347V application only ¹									

¹ Only applicable with 347V to 277V stepdown transformer; JL-403C for UNV & 347V application.

LED Wall Pack


SSL-WP1

Ordering Information Example: SSL-WP1/30W/50/UNV/DB


Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Mounting	Options
SSL (Solid State Lighting)	WP1 (Wall Pack)	30W 45W, 40W 70W, 60W 95W, 90W 140W, 135W	50 (5000K)	UNV (120-277V) 347V	DB (Dark Bronze)	Wall	Wall Pack Reflector Photocell Sensor

Dimensional Drawing

30W~70W OUTPUT

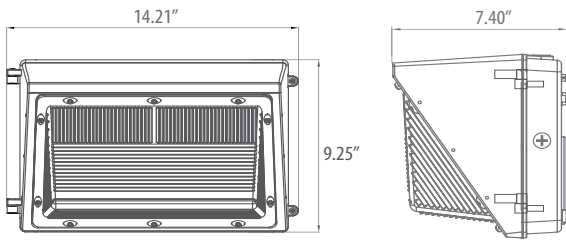

90W~140W OUTPUT

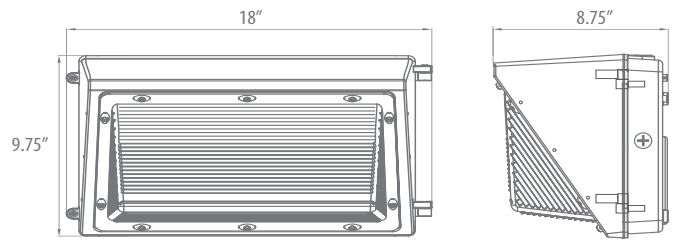

Wiring Instruction (With Photocell)

