

# A19 LED Light Bulbs



PV-A19



2-year limited warranty

Operating temperature range -40°C ~ +40°C




## Features & Benefits

- Energy Star\*, cULus listed
- High CRI (80+), dimmable\*
- Enclosed fixture application
- 15,000 hrs average life
- Damp location rated

\*For applicable models, see product specification below

## Dimensional Drawing

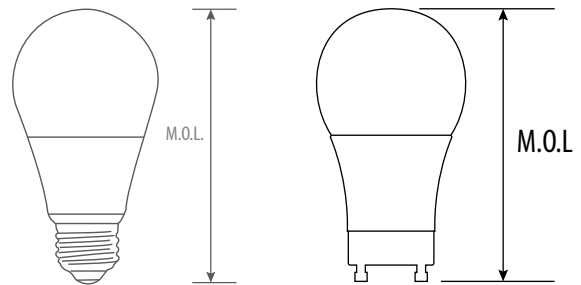

## Ordering Information Example: PV-A19/9W/30/D

| Family Name      | Lamp Type               | Wattage                           | CCT  | Dimmable                             | Others         |
|------------------|-------------------------|-----------------------------------|--|--------------------------------------|----------------|
| PV (Pure vision) | A19/S1<br>A19/I8<br>A19 | 5.5W<br>8.5W<br>9W<br>9.5W<br>14W | 27 (2700K)<br>30 (3000K)<br>40 (4000K)<br>50 (5000K) | D (Dimmable)<br>Blank (Non-dimmable) | GU (GU24 base) |

## Product Specification

| Ordering Code | Energy Star | Model Number      | Wattage (W) | Base | Voltage (V) | Hour Rating | Beam Angle | Initial Lumens(lm) | CCT(K) | CRI | Enclosed Fixture | Damp Location | Dimmable | M.O.L. (inch) | Case QTY. |
|---------------|-------------|-------------------|-------------|------|-------------|-------------|------------|--------------------|--------|-----|------------------|---------------|----------|---------------|-----------|
| 1732224       | Yes         | PV-A19/S1/9W/30/D | 9           | E26  | 120         | 15,000      | 220°       | 800                | 3000   | 80  | Yes              | Yes           | Yes      | 4.3           | 60        |
| 1732423       | Yes         | PV-A19/S1/9W/40/D | 9           | E26  | 120         | 15,000      | 220°       | 800                | 4000   | 80  | Yes              | Yes           | Yes      | 4.3           | 60        |
| 1752222       | -           | PV-A19/I8/14W/30  | 14          | E26  | 120         | 15,000      | 220°       | 1600               | 3000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1752422       | -           | PV-A19/I8/14W/40  | 14          | E26  | 120         | 15,000      | 220°       | 1600               | 4000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732115       | -           | PV-A19/S1/8.5W/27 | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 2700   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732223       | -           | PV-A19/S1/8.5W/30 | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 3000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732422       | -           | PV-A19/S1/8.5W/40 | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 4000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |

# A19 LED Light Bulbs

PV-A19



| Ordering Code | Energy Star | Model Number        | Wattage (W) | Base | Voltage (V) | Hour Rating | Beam Angle | Initial Lumens(lm) | CCT(K) | CRI | Enclosed Fixture | Damp Location | Dimmable | M.O.L. (inch) | Case QTY. |
|---------------|-------------|---------------------|-------------|------|-------------|-------------|------------|--------------------|--------|-----|------------------|---------------|----------|---------------|-----------|
| 1732519       | -           | PV-A19/S1/8.5W/50   | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 5000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732418       | -           | PV-A19/I8/8.5W/40   | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 4000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732517       | -           | PV-A19/I8/8.5W/50   | 8.5         | E26  | 120         | 15,000      | 220°       | 800                | 5000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732400       | -           | PV-A19/S5.5W/40     | 5.5         | E26  | 120         | 10,000      | 220°       | 450                | 4000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732500       | -           | PV-A19/S5.5W/50     | 5.5         | E26  | 120         | 10,000      | 220°       | 450                | 5000   | 80  | Yes              | Yes           | -        | 4.3           | 40        |
| 1732222       | Yes         | PV-A19/9.5W/30/D/GU | 9.5         | GU24 | 120         | 15,000      | 230°       | 800                | 3000   | 80  | Yes              | Yes           | Yes      | 4.17          | 40        |
| 1732421       | Yes         | PV-A19/9.5W/40/D/GU | 9.5         | GU24 | 120         | 15,000      | 230°       | 800                | 4000   | 80  | Yes              | Yes           | Yes      | 4.17          | 40        |