


LED PL Bypass


VIV-PL/BP/3CCT/H



3CCT Selectable

Ballast Bypass, Horizontal Installation


Apply to G24d (2 pin) lamp holders

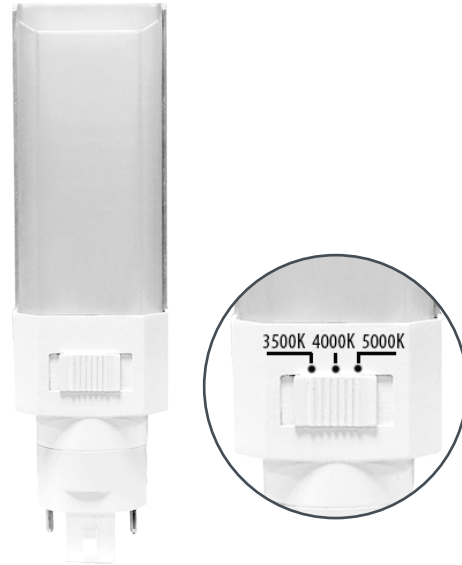

Features & Benefits

- cULus listed
- High CRI (83+), 120° beam angle
- Enclosed fixture application
- 50,000 hrs average life
- Damp location rated
- 5-year limited warranty
- Operating temperature range -20° C ~ +45° C

Dimensional Drawing

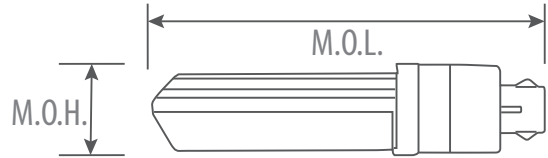

Ordering Information Example: VIV-PL/BP/8W/3CCT/H

Family Name	Lamp Type	Wattage	CCT	Installation
VIV (Vivid)	PL/BP (PL Bypass)	8W	3CCT (3CCT Selectable)	H (Horizontal)

Product Specification

Ordering Code	Model Number	Description	Watts	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumen(lm)	CCT(K)	CRI	Enclosed Fixtures Application	M.O.L. (inch)	M.O.H. (inch)	Case QTY.
1752003	VIV-PL/BP/8W/3CCT/H	PL Bypass 8W 3CCT Selectable Horizontal	8	G24d	120-277	50,000	120°	975/1000/1050	35-40-50	83	Y	5.20	1.61	50