

T8 LED Bypass

HD-T8BPSP (Selectable CCT)



5-year limited warranty

Operating temperature range -20 °C ~ +45 °C

4 ft, G13



8 ft, Fa8



8 ft, R17d




Features & Benefits

- DLC, cUL listed
- PET film, ShatterProtect¹, 120-347V
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Double-ended installation
- Our safety features allow for installation as well as misapplication protection²
- High CRI (82+), beam angle 180°, 50000 hours life (L70)
- NSF/ANSI 2 certified³

¹ ShatterProtect utilizes PET film to reduce the unexpected risk of shattering ² Need to work with NSF certified lighting fixtures. ³ Contact your local Turolight representative for detail

Dimensional Drawing

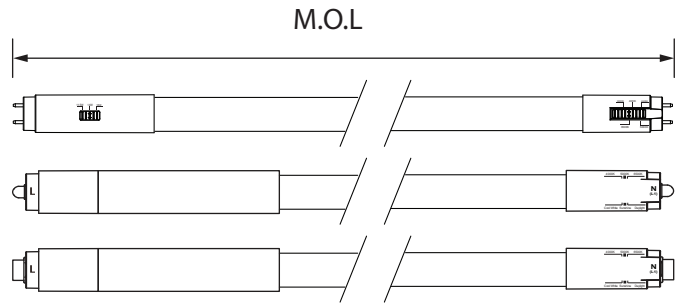

Ordering Information Example: HD-T8BPSP/Fa8/38W/3CCT/F/DE/120-347V

Family Name	Lamp Type	Base	Wattage	CCT	Frost	Installation	Voltage
HD	T8BPSP (T8 Bypass, shatter protect)	Blank (G13) Fa8 R17d	MW (Selectable Wattage) 38W	5CCT (30-35-40-50-65K) 3CCT (40-50-65K)	F (Frost)	DE (Double-ended)	120-347V

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Initial Lumens(lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1759000	Yes	HD-T8BPSP/MW/5CCT/F/DE/120-347V (4FT)	11.5-14-16	120-347	1800-2200-2400	G13	50,000	180°	30-35-40-50-65	82	48	25
1755000	Yes	HD-T8BPSP/Fa8/38W/3CCT/F/DE/120-347V (8FT)	38	120-347	5500	Fa8	50,000	180°	40-50-65	82	96	10
1755001	-	HD-T8BPSP/R17d/38W/3CCT/F/DE/120-347V (8FT)	38	120-347	5500	R17d	50,000	180°	40-50-65	82	96	10