

T5 LED DirectFit

HD-T5DFSP (Selectable CCT)



5-year limited warranty*

Operating temperature range -20 °C ~ +45 °C

not recommended to use with ballast 5 years of older.

*Please check the "Turolight Limited Warranty" for details.



Features & Benefits

DLC, cUL listed

Direct replacement for T5 HO & T5 HE linear fluorescent

NSF/ANSI 2 certified¹, shatterprotect³

Fits into existing linear fixtures

Compatible with most Instant start ballast² with input voltage of 120-277V and 347V

Beam angle 180°

50,000 hour life (L70), High CRI (83+)


¹Need to work with NSF certified lighting fixtures

²For detail, you may contact your sales person or check

³ Shatterprotect utilizes PET film to reduce the unexpected risk of shattering

www.turolight.com for ballast compatibility list

Dimensional Drawing

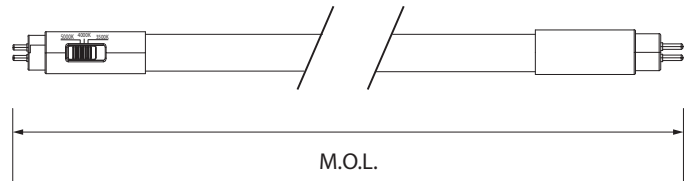

Ordering Information Example: HD-T5DFSP/13W/3CCT/F

Family Name	Lamp Type	4Wattage	CCT	Frost
HD	T5DFSP (T5 Direct fit, shatter protect)	6W (2ft) 9W (2ft / 3ft) 13W (4ft) 18W (3ft) 25.5W (4ft)	3CCT (35-40-50K)	F (Frost)

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Initial Lumens(lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1753007	-	HD-T5DFSP/6W/3CCT/F (2FT HE)	6	120-277, 347	950	G5	50,000	180°	35-40-50	83	24	8
1753008	-	HD-T5DFSP/9W/3CCT/F (3FT HE)	9	120-277, 347	1300	G5	50,000	180°	35-40-50	83	36	8
1753009	-	HD-T5DFSP/13W/3CCT/F (4FT HE)	13	120-277, 347	1950	G5	50,000	180°	35-40-50	83	48	25
1753010	-	HD-T5DFSP/9W/3CCT/F (2FT HO)	9	120-277, 347	1300	G5	50,000	180°	35-40-50	83	24	8
1753011	-	HD-T5DFSP/18W/3CCT/F (3FT HO)	18	120-277, 347	2200	G5	50,000	180°	35-40-50	83	36	8
1753012	Yes	HD-T5DFSP/25W/3CCT/F (4FT HO)	25.5	120-277, 347	3500	G5	50,000	180°	35-40-50	83	48	25