

LITETRONICS®

FLUORESCENT



FLUORESCENT LIGHTING FEATURES & BENEFITS

Energy-Lite™ T8 Fluorescent Lamps

Energy-Lite T8 lamps have an average life of 30,000 hours and are available in 2-foot (F17), 3-foot (F25) and 4-foot (F32) lengths. All Litetronics T8 fluorescent lamps are TCLP compliant. The low mercury content of these lamps meets all government safety standards, and the lamps' long life cuts down on waste.

- 30,000-hour average life
- Saves up to 40% on energy costs
- All lamps are TCLP compliant
- Up to 85 CRI
- Cathode guard
- Resists end-darkening and maintains superior lumen output throughout life of lamp

Vital Spectrum™ T12 Fluorescent Lamps

Vital Spectrum fluorescent lamps offer bright, white light with a high CRI of 92. Like the sun, Vital Spectrum's light provides vitamin D, which can assist plant growth and improve people's health.

- 30,000-hour average life
- 2-year warranty
- Provides vitamin D
- 5600K
- 92 CRI

Arctic White™ T12 Fluorescent Lamps

The Arctic White fluorescent lamp is a replacement for cool white fluorescent lighting and offers a crisp, white light with a high CRI of 90. Arctic White lamps are perfect for general applications, such as office lighting.

- 30,000-hour average life
- 2-year warranty
- TCLP compliant
- 5100K
- 90 CRI



Neolite T2 lamps are the next revolution in CFL miniaturization; the reduced tube size gives Neolite lamps a smaller maximum overall length (M.O.L.), allowing them to fit into more applications. Neolite lamps contain only 1 milligram of mercury, making Neolite the safest CFL for the environment. Neolite lamps also yield up to 70 lumens per watt – a 5% increase in efficiency over standard CFLs. Think small, think bright - think Neolite.

- Energy Star qualified
- 1 milligram of mercury
- Up to 70 lumens per watt
- 10,000 to 12,000-hour average life
- Smaller M.O.L., fits more applications

SPIRAL-LITE™ Low Profile

Litetronics Spiral-Lite™ Low Profile (SPLP) CFLs have a unique size and ultra-compact shape. The patented legless design allows SPLP lamps to fit into more applications. SPLP lamps offer a high CRI of 82, providing excellent color rendition. In addition to an average life of 10,000 hours, efficient SPLP CFLs directly replace incandescent lamps; this can reduce energy consumption by 75%.

- 10,000-hour average life
- Up to 75% energy savings
- 82 CRI
- TCLP compliant
- Directly replaces incandescent lamps
- Dimmable and 3-Way models available



SPIRAL-PAR™

Litetronics Spiral-PAR compact fluorescent lamps allow users to save time and money, while maintaining attractive design and performance. They are as versatile as standard 75-100 watt incandescent PAR lamps, and they last four times as long. Spiral-PAR lamps are effective for both indoor and outdoor applications, including track lighting and recessed can lighting. The spiral reflector allows more lumens per watt than ordinary fluorescents. Spiral-PAR lamps are available in 2700K and 4100K colors.

- 8,000-hour average life
- 80% energy savings
- Reduces labor costs
- Available in 2700K and 4100K
- Direct replacement for incandescent PAR lamps
- Operates at a lower temperature than halogen PARs, reducing HVAC costs

MICRO BRITE™

Cold Cathode Compact Fluorescent Lamps

Micro-Brite™ cold cathode compact fluorescent lamps are a direct replacement for incandescent lighting. Micro-Brite lamps have an expected life of up to 25,000 hours and can save up to 85% in energy costs when compared to incandescent lamps. Due to their extremely long life, Micro-Brite lamps also cut down on maintenance and replacement costs. Micro-Brite lamps can be used indoors or outdoors in extreme heat, cold, and weather conditions. Micro-Brite lamps are flashable and dimmable down to 5%. To experience real savings, try the patented Micro-Brite lamps.

- Up to 25,000-hour average life
- Up to 85% Energy Savings
- 2-year warranty
- TCLP compliant
- Fits standard fixtures
- Used indoors and outdoors
- Works in temperatures as low as -20° F
- Dimmable and flashable (not applicable for all models)

Correlated Color Temperature (CCT)

Describes the apparent color, or chromaticity, of a light source (measured in Kelvins). A fluorescent light source of 3,000K, for example, has a warm chromaticity; whereas, 5,000K lamps have higher blue content and are considered to be cooler in color.

Color Rendering Index (CRI)

A measured value that indicates the color-rendering quality of illumination provided by a light source. The higher the index number, the better the quality of illumination. While one lamp may have the same apparent color in CCT as another, its ability to render colors properly may be more or less than another light source.

Both CCT and CRI should be cited together when properly describing light source color attributes.

"Flamingo" is a registered trademark of Harrah's Operating Company, Inc. The use of the Flamingo logo below is intended solely to demonstrate the applicable use of Litetronics International's products and is not intended to imply or otherwise suggest any endorsement by Flamingo or affiliation between Litetronics International, Inc., and Harrah's Operating Company, Inc., or any of its properties.









FLUORESCENT APPLICATION CHART								
	Fluorescent Troffer	Recessed Can Lighting	General Lighting	Wall Sconces	Floor & Table Lighting	Track Lighting	Signs/ Marquees	Bathroom Lighting
ENERGY-LITE PLUS	●							
COLOR-BRITE	●							
VITAL SPECTRUM	●							
ARCTIC WHITE	●							
NEOLITE		●	●	●	●			
SPIRAL-LITE		●	●	●	●			
SPIRAL-PAR		●	●			●		
MICRO-BRITE		●	●	●	●	●	●	●

"Wynn" is a registered trademark of Wynn Resorts Holdings, LLC. The use of the Wynn logo above is intended solely to demonstrate the applicable use of Litetronics International's products and is not intended to imply or otherwise suggest any endorsement by Wynn or affiliation between Litetronics International, Inc., and Wynn Resorts Holdings, LLC or any of its properties.

BASES

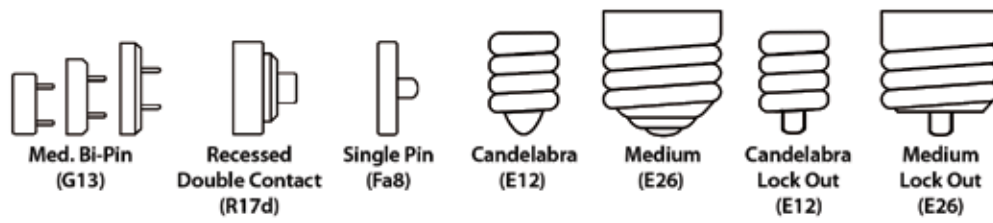

SHAPES

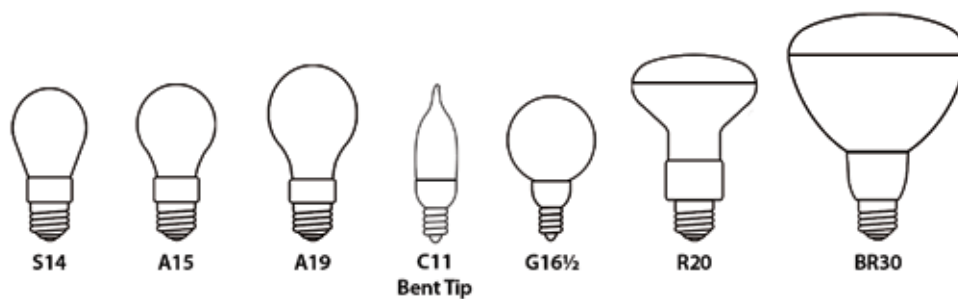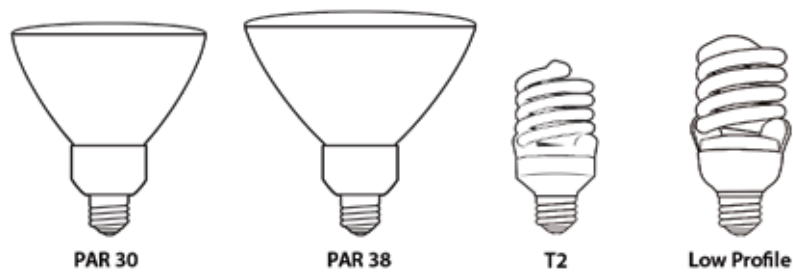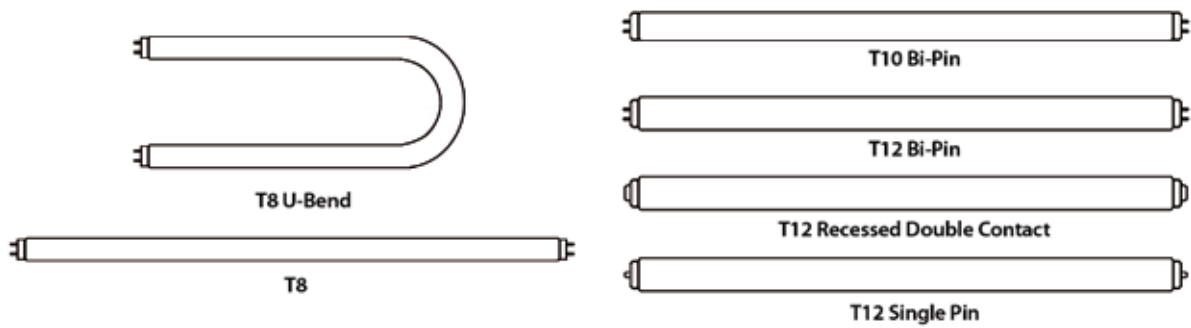

FLUORESCENT LAMPS

ENERGY-LITE PLUS™ T8 Fluorescent Lamps

T8



RATED LIFE

• 30,000 hours

APPLICATIONS

- Retail Stores
- Hospitals
- Parking Garages
- Shopping Malls
- Office Buildings

FEATURES AND BENEFITS

• 2-year warranty

WATTS	BULB TYPE	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
17	T8	MED BI PIN	F17 T8 730	L-346	25	30,000	75	3000	1,400	24"
17	T8	MED BI PIN	F17 T8 735	L-347	25	30,000	75	3500	1,400	24"
17	T8	MED BI PIN	F17 T8 741	L-348	25	30,000	75	4100	1,400	24"
17	T8	MED BI PIN	F17 T8 750	L-349	25	30,000	75	5000	1,400	24"
25	T8	MED BI PIN	F25 T8 730	L-338	25	30,000	75	3000	2,225	36"
25	T8	MED BI PIN	F25 T8 735	L-339	25	30,000	75	3500	2,225	36"
25	T8	MED BI PIN	F25 T8 741	L-340	25	30,000	75	4100	2,225	36"
25	T8	MED BI PIN	F25 T8 750	L-341	25	30,000	75	5000	2,225	36"
32	T8	MED BI PIN	F32 T8 730	L-330	25	30,000	75	3000	2,850	48"
32	T8	MED BI PIN	F32 T8 735	L-331	25	30,000	75	3500	2,850	48"
32	T8	MED BI PIN	F32 T8 741	L-332	25	30,000	75	4100	2,850	48"
32	T8	MED BI PIN	F32 T8 750	L-333	25	30,000	75	5000	2,850	48"
32	T8	MED BI PIN	F32 T8 830	L-334	25	30,000	85	3000	3,050	48"
32	T8	MED BI PIN	F32 T8 835	L-335	25	30,000	85	3500	3,050	48"
32	T8	MED BI PIN	F32 T8 841	L-336	25	30,000	85	4100	3,050	48"
32	T8	MED BI PIN	F32 T8 850	L-337	25	30,000	85	5000	3,050	48"
32	T8	MED BI PIN	F32 T8 CB50	L-359	30	30,000	90	5000	3,200	48"

ENERGY-LITE PLUS™ U-BEND T8 Fluorescent Lamps

T8



RATED LIFE

• 30,000 hours

APPLICATIONS

- Retail Stores
- Hospitals
- Parking Garages
- Shopping Malls
- Office Buildings

FEATURES AND BENEFITS

• 2-year warranty

WATTS	BULB TYPE	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
32	T8	MED BI PIN	F32 T8 735 6" U-BEND	L-381	20	30,000	75	3500	3,050	22-1/2"
32	T8	MED BI PIN	F32 T8 741 6" U-BEND	L-382	20	30,000	75	4100	3,050	22-1/2"
32	T8	MED BI PIN	F32 T8 750 6" U-BEND	L-383	20	30,000	75	5000	3,050	22-1/2"

FLUORESCENT LAMPS

COLOR-BRITE™ T10 Fluorescent Lamp

T 10



RATED LIFE

• 30,000 hours

APPLICATIONS

- Retail Stores
- Hospitals
- Parking Garages
- Shopping Malls
- Office Buildings

FEATURES AND BENEFITS

• 2-year warranty

WATTS	BULB TYPE	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
40	T10	MED BI PIN	F40 T10 CB 50	L-365	30	30,000	88	5,000	3,700	48"

COLOR-BRITE™ T12 Fluorescent Lamps

T 12



RATED LIFE

• 15,000 - 20,000 hours

APPLICATIONS

- Retail Stores
- Hospitals
- Parking Garages
- Shopping Malls
- Office Buildings

FEATURES AND BENEFITS

• 1 to 2-year warranty

WATTS	BULB TYPE	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
75	T12	SINGLE PIN	F96 T12 CB 50	L-363	15	20,000	88	5000	6,800	96"
110	T12	RDC	F96 T12 CB 50 HO	L-371HO	15	15,000	88	5000	9,800	96"

VITAL-SPECTRUM™ / ARCTIC WHITE™ T12 Fluorescent Lamps

T 12



RATED LIFE

• 30,000 hours

APPLICATIONS

- Retail Stores
- Hospitals
- Parking Garages
- Shopping Malls
- Office Buildings

FEATURES AND BENEFITS

• 2-year warranty

WATTS	BULB TYPE	BASE	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
40	T12	MED BI PIN	F40 T12 VS	L-362	30	30,000	92	5600	2,200	48"
40	T12	MED BI PIN	F40 T12 A	L-370	30	30,000	90	5100	2,925	48"

FLUORESCENT LAMPS



T2 Compact Fluorescent Lamps

CFL



RATED LIFE

• 10,000-12,000 hours

APPLICATIONS

- General Lighting
- Recessed Cans
- Table Lamps


FEATURES AND BENEFITS

- 1 milligram of mercury
- Directly replaces incandescent lamps
- Extremely low M.O.L., can fit more applications

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**	M.O.D.***
10 \$	MED LO	120	10W T2 27	NL-10427	30	10,000	82	2700	635	3-3/4"	1-5/8"
10 \$	MED LO	120	10W T2 41	NL-10441	30	10,000	82	4100	635	3-3/4"	1-5/8"
10 \$	MED LO	120	10W T2 50	NL-10450	30	10,000	82	5000	570	3-3/4"	1-5/8"
13 \$	MED LO	120	13W T2 27	NL-13427	30	12,000	82	2700	825	3-7/8"	1-5/8"
13 \$	MED LO	120	13W T2 41	NL-13441	30	12,000	82	4100	825	3-7/8"	1-5/8"
13 \$	MED LO	120	13W T2 50	NL-13450	30	12,000	82	5000	740	3-7/8"	1-5/8"
15 \$	MED LO	120	15W T2 27	NL-15427	30	10,000	82	2700	1005	4-1/16"	1-5/8"
15 \$	MED LO	120	15W T2 41	NL-15441	30	10,000	82	4100	1005	4-1/16"	1-5/8"
15 \$	MED LO	120	15W T2 50	NL-15450	30	10,000	82	5000	905	4-1/16"	1-5/8"
20 \$	MED LO	120	20W T2 27	NL-20427	30	12,000	82	2700	1295	4-3/8"	2-1/8"
20 \$	MED LO	120	20W T2 41	NL-20441	30	12,000	82	4100	1295	4-3/8"	2-1/8"
20 \$	MED LO	120	20W T2 50	NL-20450	30	12,000	82	5000	1165	4-3/8"	2-1/8"
23 \$	MED LO	120	23W T2 27	NL-23427	30	12,000	82	2700	1660	4-3/4"	2-1/8"
23 \$	MED LO	120	23W T2 41	NL-23441	30	12,000	82	4100	1660	4-3/4"	2-1/8"
23 \$	MED LO	120	23W T2 50	NL-23450	30	12,000	82	5000	1495	4-3/4"	2-1/8"

\$ = Energy Savings

☑ = Energy Star Qualified



Conversion Chart

10 watts	=	40 watts
13 watts	=	60 watts
15 watts	=	60 watts
20 watts	=	75 watts
23 watts	=	100 watts

LITETRONICS®

• LITETRONICS EXCLUSIVE

**M.O.L. = Maximum Overall Length (in inches)

***M.O.D. = Maximum Overall Diameter (in inches)

© 2006 LITETRONICS International, Inc.

FLUORESCENT LAMPS

—SPIRAL-LITE™ LOW PROFILE Ultra Compact Fluorescent Lamps

CFL



RATED LIFE

• 10,000-15,000 hours

APPLICATIONS

- General Lighting
- Recessed Cans
- Table Lamps

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**	M.O.D.***
27 \$	MED LO	120	27W SPLP 27	L-27427	10	10,000	82	2700	2,015	5-1/4"	2-1/2"
27 \$	MED LO	120	27W SPLP 41	L-27441	10	10,000	82	4100	2,015	5-1/4"	2-1/2"
27 \$	MED LO	120	27W SPLP 50	L-27450	10	10,000	82	5000	2,015	5-1/4"	2-1/2"
30 \$	MED LO	120	30W SPLP 27 BD	L-30427	30	15,000	82	2700	2,050	5-1/4"	2-5/8"
42 \$	MED LO	120	42W SPLP 27 BD	L-42427	30	10,000	82	2700	2,850	5-5/8"	2-5/8"

—SPIRAL-LITE™ LOW PROFILE 3-Way Compact Fluorescent Lamps

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**	M.O.D.***
12/22/33 \$	MED	120	33W SPLP 3-WAY 27	L-33627	40	10,000	82	2700	700/1500/2245	5-3/8"	2-3/4"

—SPIRAL-LITE™ LOW PROFILE Dimmable Compact Fluorescent Lamps

CFL



RATED LIFE

• 6,000-10,000 hours

APPLICATIONS

- General Lighting
- Recessed Cans
- Table Lamps

FEATURES AND BENEFITS

- Works in standard dimming circuits
- Directly replaces incandescent lamps in most medium-based incandescent fixtures.

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**	M.O.D.***
15 \$	MED LO	120	15W DS 27	L-15427D	30	10,000	82	2700	950	5-3/8"	2-5/16"
20 \$	MED LO	120	20W DS 27	L-20427D	30	6,000	82	2700	1,265	5-5/8"	2-5/16"
23 \$	MED LO	120	23W DS 27	L-23427D	30	10,000	82	2700	1,600	6-1/16"	2-5/16"

\$ = Energy Savings

☑ = Energy Star Qualified



SPIRAL-LITE™

Conversion Chart

15 watts	=	60 watts
20 watts	=	75 watts
23 watts	=	100 watts
27 watts	=	125 watts
30 watts	=	125 watts
42 watts	=	150 watts
12/22/33 watts	=	50/100/150 watts



FLUORESCENT LAMPS

SPIRAL-PAR™ LOW PROFILE Ultra Compact PAR30 Fluorescent Lamps

PAR30



RATED LIFE

• 8,000 hours

APPLICATIONS

- General Lighting
- Signs
- Marquees

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
15 \$	MED LO	120	15W SPLP PAR30 27	L-1371	10	8,000	82	2700	725	5"
15 \$	MED LO	120	15W SPLP PAR30 41	L-1372	10	8,000	82	4100	725	5"

\$ = Energy Savings

SPIRAL-PAR™ LOW PROFILE Ultra Compact PAR38 Fluorescent Lamps

PAR38



RATED LIFE

• 8,000 hours

APPLICATIONS


- General Lighting
- Signs
- Marquees

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
20 \$	MED LO	120	20W SPLP PAR38 27	L-1271	10	8,000	82	2700	975	5-7/8"
20 \$	MED LO	120	20W SPLP PAR38 41	L-1272	10	8,000	82	4100	975	5-7/8"

\$ = Energy Savings

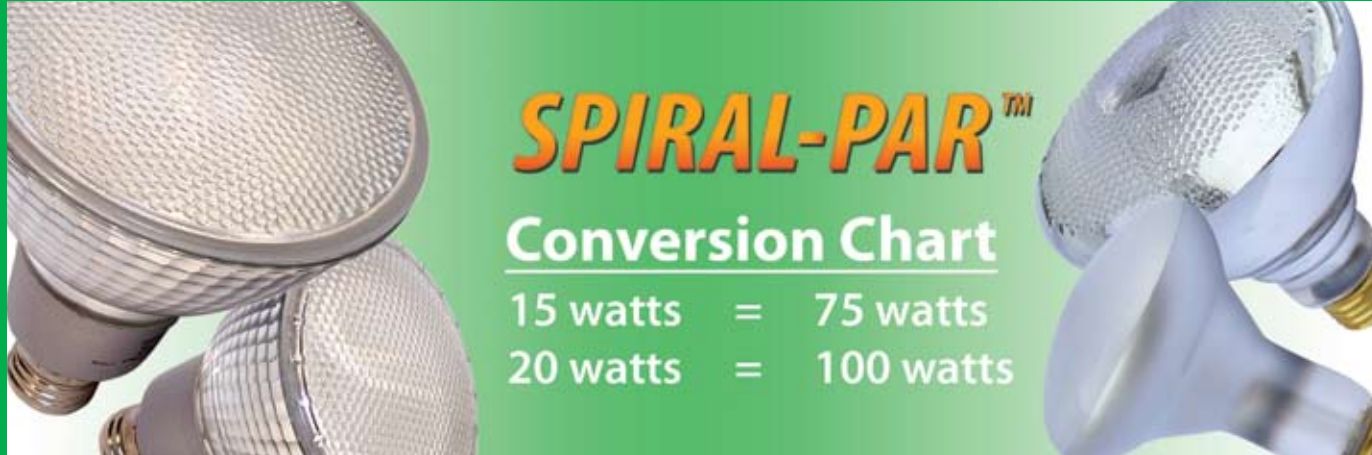

SPIRAL-PAR™

Conversion Chart

15 watts = 75 watts
20 watts = 100 watts

LITETRONICS®

• LITETRONICS EXCLUSIVE

**M.O.L. = Maximum Overall Length (in inches)

***M.O.D. = Maximum Overall Diameter (in inches)

© 2006 LITETRONICS International, Inc.

FLUORESCENT LAMPS

MICRO BRITE™ Cold Cathode S14 Micro Compact Fluorescent Lamps

S14



RATED LIFE

- 25,000 hours

APPLICATIONS

- General Lighting
- Signs
- Marquees

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures.
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
*2 \$	MED	120	2W S14 CL SW	MB-200	30	25,000	82	2700	80	3-5/8"
*2 \$	MED	120	2W S14 WH SW	MB-201	30	25,000	82	2700	80	3-5/8"
*3 \$	MED	120	3W S14 CL SW	MB-300	30	25,000	82	2700	130	3-5/8"
*3 \$	MED	120	3W S14 WH SW	MB-301	30	25,000	82	2700	130	3-5/8"

\$ = Energy Savings

* = Non-Dimming

MICRO BRITE™ Cold Cathode A15 Micro Compact Fluorescent Lamp

A15



RATED LIFE

- 25,000 hours

APPLICATIONS

- Signs
- Marquees
- Refrigerators
- Ceiling Fans


FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures.
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
*4 \$	MED	120	4W A15 WH SW	MB-401	30	25,000	82	2700	175	3-1/2"

\$ = Energy Savings

* = Non-Dimming



MICRO BRITE™

Conversion Chart

2 watts	=	11 watts
3 watts	=	20 watts
4 watts	=	25 watts
5 watts	=	30 watts
8 watts	=	45 watts

FLUORESCENT LAMPS

MICRO BRITE™ Cold Cathode A19 Micro Compact Fluorescent Lamps

A19



RATED LIFE

• 18,000-25,000 hours

APPLICATIONS

- Marquees
- Signs
- Floor and Table Lighting
- General Lighting

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
*3 \$	MED	120	3W A19 CL SW	MB-310	15	25,000	82	2700	130	4-1/4"
5 \$	MED LO	120	5W A19 CL LW	MB-500DL	15	25,000	82	2250	200	4-1/4"
5 \$	MED LO	120	5W A19 CL PW	MB-500DP	15	25,000	82	2850	200	4-1/4"
5 \$	MED LO	120	5W A19 WH LW	MB-501DL	15	25,000	82	2250	200	4-1/4"
5 \$	MED LO	120	5W A19 WH PW	MB-501DP	15	25,000	82	2850	200	4-1/4"
5 \$	MED	120	5W A19 WH 4	MB-502D	15	25,000	82	4100	200	4-1/4"
°8 \$	MED LO	120	8W A19 CL LW	MB-800DL	15	18,000	82	2250	325	4-7/8"
°8 \$	MED LO	120	8W A19 CL PW	MB-800DP	15	18,000	82	2850	325	4-7/8"
°8 \$	MED LO	120	8W A19 WH LW	MB-801DL	15	18,000	82	2250	325	4-7/8"
°8 \$	MED LO	120	8W A19 WH PW	MB-801DP	15	18,000	82	2850	325	4-7/8"
°8 \$	MED	120	8W A19 WH 4	MB-802D	15	18,000	82	4100	325	4-7/8"

\$ = Energy Savings

* = Non-Dimming

° = Non-Flashing

FLUORESCENT LAMPS

MICRO BRITE™ Cold Cathode C11 Bent Tip Micro Compact Fluorescent Lamps

C11



RATED LIFE

- 25,000 hours

APPLICATIONS

- Chandelier Lighting
- Wall Sconces
- Floor and Table Lighting

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
5 \$	MED LO	120	5W C11 CL PW BENT TIP	MB-543DP	30	25,000	82	2850	200	4-7/8"
5 \$	MED LO	120	5W C11 WH PW BENT TIP	MB-545DP	30	25,000	82	2850	200	4-7/8"
5 \$	CAND LO	120	5W C11 CL PW BENT TIP	MB-547DP	30	25,000	82	2850	200	4-3/4"
5 \$	CAND LO	120	5W C11 WH PW BENT TIP	MB-549DP	30	25,000	82	2850	200	4-3/4"

\$ = Energy Savings

MICRO BRITE™ Cold Cathode G16½ Micro Compact Fluorescent Lamp

G16 ½



RATED LIFE

- 25,000 hours

APPLICATIONS

- Marquees
- Signs
- Bathroom Lighting
- Chandeliers

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures.
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
5 \$	CAND LO	120	5W G16.5 CL PW	MB-538DP	20	25,000	82	2850	200	3-3/4"

\$ = Energy Savings

FLUORESCENT LAMPS

MICRO BRITE™ Cold Cathode R20 Micro Compact Fluorescent Lamps

R20



RATED LIFE

- 25,000 hours

APPLICATIONS

- Marquees
- Signs
- Elevator Lighting
- Track and Recessed Lighting

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures.
- 2-year warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
5 \$	MED LO	120	5W R20 FF LW	MB-509DL	15	25,000	82	2250	200	4-1/16"
5 \$	MED LO	120	5W R20 FF PW	MB-509DP	15	25,000	82	2850	200	4-1/16"

\$ = Energy Savings

MICRO BRITE™ Cold Cathode BR30 Micro Compact Fluorescent Lamps

BR30



RATED LIFE

- 18,000 hours

APPLICATIONS

- Track Lighting
- Recessed Can Lighting
- Hard to Reach Locations

FEATURES AND BENEFITS

- Directly replaces incandescent lamps in most medium-based incandescent fixtures
- 2 Year Warranty

WATTS	BASE	VOLTS	DESCRIPTION	ORDERING CODE	QTY/ CASE	AVERAGE RATED LIFE	CRI	CORRELATED COLOR TEMP(K)	INITIAL LUMENS	M.O.L.**
°8 \$	MED LO	120	8W BR30 FF LW	MB-900DL	6	18,000	82	2250	325	5-3/8"
°8 \$	MED LO	120	8W BR30 FF PW	MB-900DP	6	18,000	82	2850	325	5-3/8"

\$ = Energy Savings

° = Non-Flashing

LOCK-OUT DISKS



FEATURES AND BENEFITS

- For use with lock-out bases to permanently convert incandescent sockets to qualify for utility rebates

BASE	DESCRIPTION	ORDERING CODE
MED	E26 LO DISK	MB-DISK1
CAND	E12 LO DISK	MB-DISK3