



300W(2*150W)



40W ~ 250W

Key Features

- Die cast aluminum housing with powder coated finish for corrosion-resistance
- Anodized aluminum reflector and clear tempered glass lens for good lighting distribution
- Hi-heat resistant sealing ring
- Split compartments of lamp and ballast for long lifetime

Electronic Features



- Rectangular tubular induction lamp with high lighting efficiency and life span of 100,000hours
- Stable lumen output and high lumen maintenance
- CRI higher than 80, and IP rating IP65 (control gear)
- High power factor (>0.95), flickering free operation with low ballast loss and constant output

Applications

- Billboards
- Buildings
- Parks
- Plazas
- Pools

Order Code	Model Number	Description	Lamp	Volts (V)	IP	Whole Package L xW xH (mm)	Lens	G.W. (kg)	Initial Lumens	UL cUL	CSA
3886521	ID-FL-1-R70	70W Ind.Flood,Slipfitter,5000K&Blst	R70L	120-277	65	565x470x265	Glass	10.00	4900	Yes	-
3886534	ID-FL-1-R80	80W Ind.Flood,Slipfitter,5000K&Blst	R80L	120-277	65	565x470x265	Glass	10.00	6000	Yes/No ML	-
3886505	ID-FL-1-R100	100W Ind.Flood,Slipfitter,5000K&Blst	R100L	120-277	65	565x470x265	Glass	10.00	7500	Yes	-
3887108	ID-FL-1-R150	150W Ind.Flood,Slipfitter,5000K&Blst	R150L	120-277	65	700x620x330	Glass	22.50	9000	Yes	-
3887109	ID-FL-1-R200	200W Ind.Flood,Slipfitter,5000K&Blst	R200L	120-277	65	700x620x330	Glass	22.50	12000	Yes	-
3888100	ID-FL-1-R250	250W Ind.Flood,Slipfitter,5000K&Blst	R250L	120-277	65	700x620x330	Glass	22.50	16000	Yes	-
3887110	ID-FL-1-R300	300W (2*150W) Ind.Flood,Slipfitter,5000K&Blst	R150L	120-277	65	700x620x330	Glass	22.50	18000	Yes	-
3888509	ID-FL-1-R70/347V	70W Ind.Flood,Slipfitter,5000K&Blst,347V	R70L	208-347	65	565x470x265	Glass	10.00	4900	-	Yes / Not ML
3888510	ID-FL-1-R80/347V	80W Ind.Flood,Slipfitter,5000K&Blst,347V	R80L	208-347	65	565x470x265	Glass	10.00	6000	-	Yes / Not ML
3888511	ID-FL-1-R100/347V	100W Ind.Flood,Slipfitter,5000K&Blst,347V	R100L	208-347	65	565x470x265	Glass	10.00	7500	-	Yes / Not ML

*CCT(K) 5000K, Ambient Temp: -20 ~ +40, Slip Fitter (Round Pole) "U" shape bracket Installation, Average Life 100,000 hours.

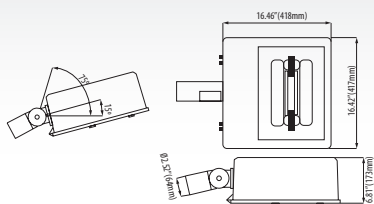

Distributed by: