


Flood – Square Slipfitter



300W/400W

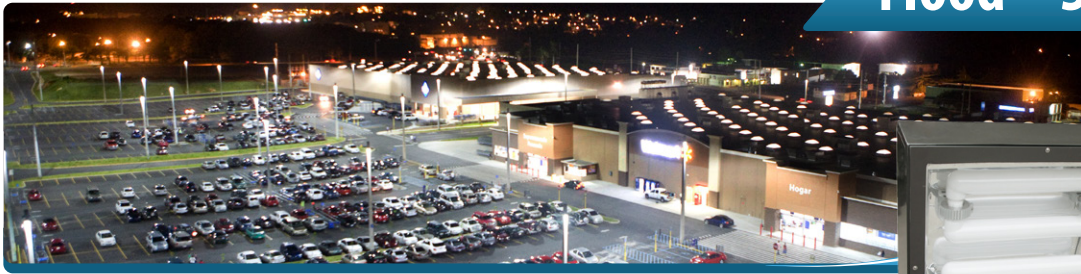

150W ~ 250W

Key Features

- Square welded aluminum housing with white powder coated finish for corrosion-resistance
- Simple and concise contour, hydro-formed aluminum reflector with vacuum coating for good optical performance
- Flat clear tempered glass lens for good lighting penetration
- Optional slip fitters and bracket installation
- Split compartments of lamp and ballast for long lifetime
- The generator is fastened with spring clip for convenient assembly and maintenance

Applications

- Stadiums
- Parking lots
- Public areas



Electronic Features

- Round and rectangular tubular induction lamp with high lighting efficiency and life span of 100,000hours
- Stable lumen output and high lumen maintenance
- CRI higher than 80, and IP rating IP54 (control gear)
- High power factor (>0.95), flickering free operation with low ballast loss and constant output

Order Code	Model Number	Description	Lamp	Volts (V)	IP	Whole Package L xW xH (mm)	Lens	G.W. (kg)	Initial Lumens	UL cUL	CSA
3887111	ID-FL-2-R150	150W Ind.Flood,SQ-Slipfitter,5000K&Blst	C150L	120-277	54	845x570x230	Glass	13.6	9000	Yes	-
3887112	ID-FL-2-R200	200W Ind.Flood,SQ-Slipfitter,5000K&Blst	C200L	120-277	54	845x570x230	Glass	13.6	12000	Yes	-
3888101	ID-FL-2-R250	250W Ind.Flood,SQ-Slipfitter,5000K&Blst	C250L	120-277	54	905x620x270	Glass	19.5	16000	Yes	-
3887113	ID-FL-2-R300	300W (2*150W) Ind.Flood,SQ-Slipfitter,5000K&Blst	R150L	120-277	54	905x620x270	Glass	19.5	18000	Yes	-
3887114	ID-FL-2-R400	400W (2*200W) Ind.Flood,SQ-Slipfitter,5000K&Blst	R200L	120-277	54	905x620x270	Glass	19.5	24000	Yes	-

*CCT(K) 5000K, Ambient Temp: -20 ~ +40, Slip Fitter,Square Slip Fitter Installation, Average Life 100,000 hours.

Model Number	L	LI	W	H
ID-FL-2-R150	24.49(622)	32.48(825)	21.73(552)	6.50(165)
ID-FL-2-R200				
ID-FL-2-R250	26.85(682)	34.84(885)	23.7(602)	8.07(205)
ID-FL-2-R300				
ID-FL-2-R400				

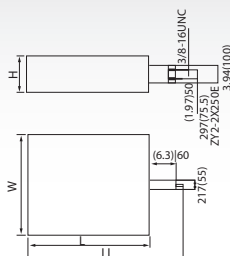

Distributed by: