



Turolight offers a high performance, extremely durable Low Bay Fixture designed specifically to replace conventional lighting in a wide variety of industrial applications; both indoor

Supreme fusion of energy savings, durability, versatility and easy installation...

and outdoor. The Low Bay fixture has a small profile, is light weight and designed for a variety of mounting options. It is ideal for many applications such as indoor and outdoor car parks, garages, cold storage and general area lighting applications.

Key Features

- Die cast aluminum housing with powder coated finish for corrosion-resistance
- Anodized aluminum reflector and clear tempered glass lens for good lighting distribution
- Split compartments of lamp and ballast for long lifetime
- Upward lighting


Applications

- Billboards
- Buildings
- Parks
- Pools
- Parking lots
- Tennis courts
- Scenic and historical sites


Electronic Features

- Rectangular tubular induction lamp with high lighting efficiency and life span of 100,000hours
- Stable lumen output and high lumen maintenance
- CRI higher than 80, and IP rating IP65 (control gear)
- High power factor (>0.95), flickering free operation with low ballast loss and constant output

Dimensions / Drawing

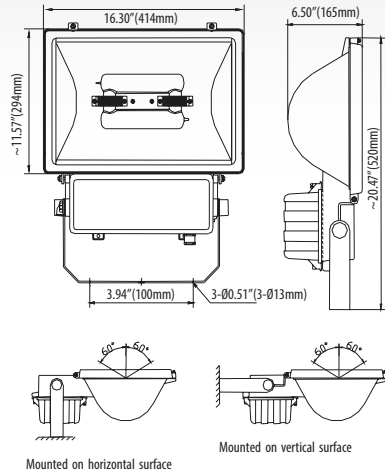

Photometric / IES

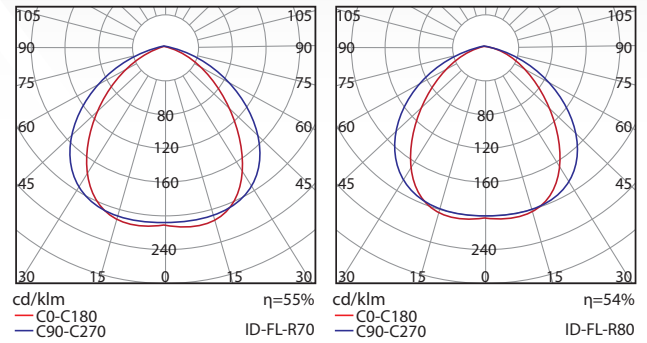

Order Code	Model Number	Description	Lamp	Volts (V)	IP	Whole Package L xW xH (mm)	Lens	G.W. (kg)	Initial Lumens	UL cUL	CSA
3886520	ID-FL-R70	70W Ind.Flood,U-Bracket,5000K&Blst	R70L	120-277	65	470x435x185	Glass	7.50	4900	Yes	-
3886533	ID-FL-R80	80W Ind.Flood,U-Bracket,5000K&Blst	R80L	120-277	65	470x435x185	Glass	7.50	6000	Yes	-
3886504	ID-FL-R100	100W Ind.Flood,U-Bracket,5000K&Blst	R100L	120-277	65	470x435x185	Glass	7.50	7500	Yes	-
3887502	ID-FL-R120	120W Ind.Flood,U-Bracket,5000K&Blst	R120L	120-277	65	605x600x245	Glass	12.00	9000	Yes/No ML	-
3887509	ID-FL-R150	150W Ind.Flood,U-Bracket,5000K&Blst	R150L	120-277	65	605x600x245	Glass	12.00	12000	Yes/no ML	-
3887107	ID-FL-R200	200W Ind.Flood,U-Bracket,5000K&Blst	R200L	120-277	65	605x600x245	Glass	12.00	16000	Yes/No ML	-
3886214	ID-FL-R70/347V	70W Ind.Flood,U-Bracket,5000K&Blst,347V	R70L	208-347	65	470x435x185	Glass	7.50	4900	-	Yes / Not ML
3886215	ID-FL-R80/347V	80W Ind.Flood,U-Bracket,5000K&Blst,347V	R80L	208-347	65	470x435x185	Glass	7.50	6000	-	Yes / Not ML
3886216	ID-FL-R100/347V	100W Ind.Flood,U-Bracket,5000K&Blst,347V	R100L	208-347	65	470x435x185	Glass	7.50	7500	-	Yes / Not ML
3887212	ID-FL-R120/347V	120W Ind.Flood,U-Bracket,5000K&Blst,347V	R120L	208-347	65	605x600x245	Glass	12.00	9000	-	Yes / Not ML
3887213	ID-FL-R150/347V	150W Ind.Flood,U-Bracket,5000K&Blst,347V	R150L	208-347	65	605x600x245	Glass	12.00	12000	-	Yes / Not ML
3887214	ID-FL-R200/347V	200W Ind.Flood,U-Bracket,5000K&Blst,347V	R200L	208-347	65	605x600x245	Glass	12.00	16000	-	Yes / Not ML

*CCT(K) 5000K, Ambient Temp: -20 ~ +40, Bracket Installation, Average Life 100,000 hours.

Project Details:

Project Name:
 Fixture Type:
 Distributor:
 PO:

Distributed by:



TO ORDER PLEASE CALL 1-877-736-0447 OR EMAIL: SALES@TUROLIGHT.COM

Tel: (416) 736-0447 • Toll Free: 1 (877) 736-0447 • Fax: (416) 736-4890 • Email: info@turolight.com • Website: www.turolight.com