



### Key Features

- 2750 Lumens
- High CRI (82+)
- 12,000 hour average life
- Even light distribution

### Applications

- Commercial
- Residential
- Hospitality
- Restaurants
- Property Management


### Other information

- Operating temperature range between -20°C and +40°C
- UL/cUL listed, FCC compliant
- 1-year limited warranty in commercial and residential use

### General Usage

- General lighting
- Recessed Down Lights/Pot Lights
- Specialty

| Order Code | Model Number    | Watts | Base | Hour Rating | Initial Lumens | CCT (K) | CRI | M.O.L. (inch) | Case Qty. |
|------------|-----------------|-------|------|-------------|----------------|---------|-----|---------------|-----------|
| 1165101    | TUFF-PLL-40W/27 | 40    | 2G11 | 12,000      | 2750           | 2700    | 82  | 22.32         | 25        |
| 1165301    | TUFF-PLL-40W/35 | 40    | 2G11 | 12,000      | 2750           | 3500    | 82  | 22.32         | 25        |
| 1165401    | TUFF-PLL-40W/41 | 40    | 2G11 | 12,000      | 2700           | 4100    | 82  | 22.32         | 25        |
| 1165501    | TUFF-PLL-40W/50 | 40    | 2G11 | 12,000      | 2550           | 5000    | 82  | 22.32         | 25        |

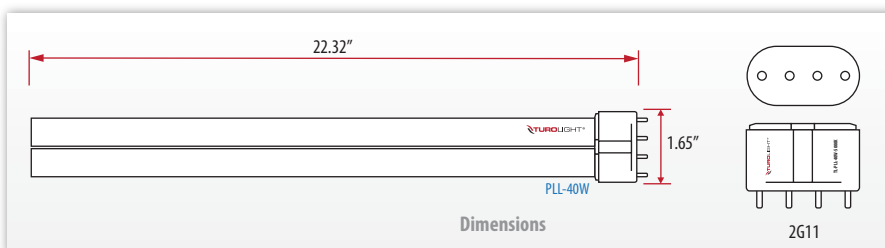

How to read: TUFF- PLL - 40W / 27  
Series Lamp Type Wattage CCT(K)

### Distributed by: