



### Physical Features

- DLC listed
- Sealed die-casting profile for outdoor applications
- Unique built-in line level
- Excellent heat dissipation performance
- PC (Polycarbonate) lens type
- Suitable for outdoor use with respect to exposure to Ultraviolet Light, Water Exposure and Immersion in accordance with UL 746C
- Fits electrical box and wall mount directly



### Application

Security, entry ways, stairways, storage and perimeter areas, as well as residential exteriors


### Other information

- cUL listed and DLC listed
- 5-year limited warranty for DLC approved

### Electronic Features

- 2700 lumen stable lumen output and high lumen maintenance
- 15W, 17W Replaces 100W, 120W INCANDESCENT
- 25W Replaces 50W MH
- Long life span of 50,000 hours
- High CRI (80+)
- High power factor (0.90+)
- Built-in UL class 2 driver, and 120V photocell
- Working temperature ranges from -25° to +40°

### Dimensions / Drawing

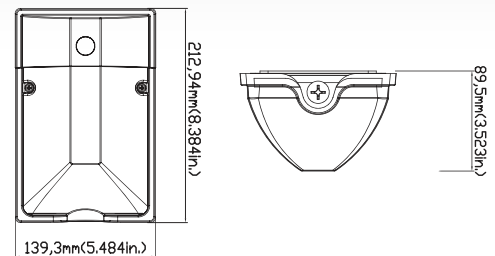

Order Code	Model Number	Description	DLC	Watts	Volts	Hour Rating	Optics/ Distribution	Init. Lum.	CCT (K)	CRI	Wet Loc	Dimensions LxWxH (inch)	CS Qty.
3662105	SSL-DW1/15W/50/120/F/DB	SSL 15W LED Doorway Light, 50K, 120V, PC Lens Frost, Dark Bronze	DLC	15	120	50,000	H105°xV90°	1600	5000K	82	Y	5.48x3.52x8.38	12
3663109	SSL-DW1/17W/50/120/F/DB	SSL 17W LED Doorway Light, 50K, 120V, PC Lens Frost, Dark Bronze	DLC	17	120	50,000	H90°xV110°	2000	5000K	70	Y	5.48x3.52x8.38	12
3664102	SSL-DW1/25W/50/120/F/DB	SSL 25W LED Doorway Light, 50K, 120V, PC Lens Frost, Dark Bronze	DLC	25	120	50,000	H90°xV110°	2700	5000K	70	Y	5.48x3.52x8.38	12

Ambient Operating Temperature -25°C ~ +40°C

For the latest stock status please refer to your price list or send us an email at [sales@turolight.com](mailto:sales@turolight.com)

How our Model No. Works:

### Ordering Information

SSL	DW1	17W	50	120	F	DB
Family	Fixture Style	Wattage	Colour Temperature	Voltage	Voltage	Body Finish
	DW1 - Doorway	15W 17W 25W	50 - 5000K	120V	F - Frosted	DB - Dark Bronze