

Physical Features

- Slim and chic design for upscale appearance, easy installation and maintenance
- Sealed die-casting profile for ideal outdoor application
- Head tilt angle reaching 20 degree



Application

Perimeter and security lighting for entryway/pathway of buildings

Accessories

- Photocell sensor


Other information

- cUL listed and DLC listed
- 5-year limited warranty

Electronic Features

- Stable lumen output and high lumen maintenance
- 30W-90W Replaces 100W-320W MH
- LED lamp with high lighting efficiency and life span of 50,000hours
- High CRI (70+)
- UL certified for wet locations
- High power factor (>0.90)
- Working temperature ranges from -40° to +40°

Dimensions / Drawing

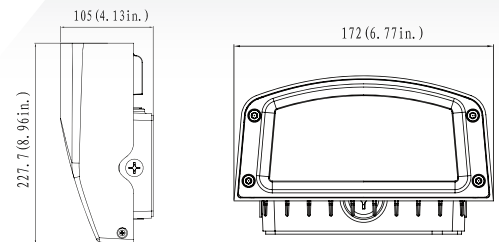

Order Code	Model Number	Description	DLC	Watts	Volts (V)	Hour Rating	Optics/ Distribution	Init. Lum.	CCT(K)	CRI	Dimensions LxWxH (inch)	Wet Loc	CS Qty.
3664107	SSL-WP2/30W/50/UNV/DB/PS1	SSL 30W LED Slim Wall Pack, 50K, 120V, Dark Bronze		30	120	50,000	TYPE III	3000	5000K	70	8.96 x 6.77 x 4.13	Y	6
3665115	SSL-WP2/40W/50/UNV/DB/PS1	SSL 40W LED Slim Wall Pack, 50K, 120V, Dark Bronze		40	120	50,000	TYPE III	4500	5000K	70	8.96 x 6.77 x 4.13	Y	6
3666112	SSL-WP2/70W/50/UNV/DB/PS1	SSL 70W LED Slim Wall Pack, 50K, 120V, Dark Bronze		70	120	50,000	TYPE III	7800	5000K	70	12.99 x 10.16 x 5.17	Y	1
3666113	SSL-WP2/90W/50/UNV/DB/PS1	SSL 90W LED Slim Wall Pack, 50K, 120V, Dark Bronze		90	120	50,000	TYPE III	10500	5000K	70	12.99 x 10.16 x 5.17	Y	1
3685100	SSL-WP2/40W/50/UNV/BK	SSL 40W LED Slim Wall Pack, 50K, 120V, Black		40	120	50,000	TYPE III	4500	5000K	70	8.96 x 6.77 x 4.13	Y	6

Ambient Operating Temperature -25°C ~ +40°C

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How our Model No. Works:

Ordering Information

SSL	WP2	30W	50	UNV	BK	PS1
Family	Fixture Style	Wattage	Colour Temperature	Voltage	Body Finish	Sensor Option
	WP2 - Slim Wall Pack	30W/40W 70W/90W	50 - 5000K	UNV - 120-277V	BK - Black DB - Dark Bronze	PS1 - Photocell Sensor

Distributed by: