



Key Features

- Equipped with Microwave Sensor for higher sensitivity & wider detection range
- High lumen efficacy of 115lm/w
- Samsung LED chip, Philips LED dimming driver
- Long life span of 50,000 hours
- High CRI (80+)
- Harmonic Distortion less than 15%

Application

Retails, Warehouses, Schools
Underground Parking, Factories
Workshops, Hospitals, Office Buildings


Sensor Information

- Detection ranges up to 16m in diameter , 8m in height
- Built-in adjustable daylight sensor
- Automatic dimming with our dimmable LED drivers
- Easy DIP switch selection for optimized energy saving mode of each specific application

Other information

- cUL listed
- 5-year limited warranty for Fixture and Sensor
- Wall mounting optional

Dimensions / Drawing

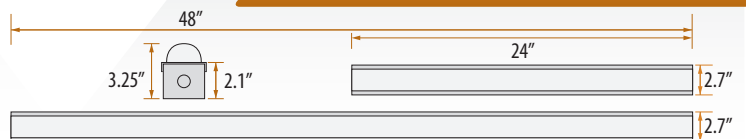

Order Code	Model Number	Description	DLC	Watts	Volts (V)	Hour Rating	Lumens	CCT (K)	CRI	M.O.L (inch)
3663111	DL-LS/2F/20W/40/UNV/D/S	DeltaLum Linear Strip 2ft 20W 40K 120-277V Dimmable, with Sensor	-	20	120-277	50,000	2300	4000	>80	24
3663112	DL-LS/2F/20W/50/UNV/D/S	DeltaLum Linear Strip 2ft 20W 50K 120-277V Dimmable, with Sensor	-	20	120-277	50,000	2300	5000	>80	24
3665111	DL-LS/4F/40W/40/UNV/D/S	DeltaLum Linear Strip 4ft 40W 40K 120-277V Dimmable, with Sensor	DLC	40	120-277	50,000	4700	4000	>80	48
3665112	DL-LS/4F/40W/50/UNV/D/S	DeltaLum Linear Strip 4ft 40W 50K 120-277V Dimmable, with Sensor	DLC	40	120-277	50,000	4700	5000	>80	48
3666110	DL-LS/4F/60W/40/UNV/D/S	DeltaLum Linear Strip 4ft 60W 40K 120-277V Dimmable, with Sensor	DLC	60	120-277	50,000	7000	4000	>80	48
3666111	DL-LS/4F/60W/50/UNV/D/S	DeltaLum Linear Strip 4ft 60W 50K 120-277V Dimmable, with Sensor	DLC	60	120-277	50,000	7000	5000	>80	48
3663200	DL-LS/2F/20W/40/347/D/S	DeltaLum Linear Strip 2ft 20W 40K 347V Dimmable, with Sensor	-	20	347	50,000	2300	4000	>80	24
3663201	DL-LS/2F/20W/50/347/D/S	DeltaLum Linear Strip 2ft 20W 50K 347V Dimmable, with Sensor	-	20	347	50,000	2300	5000	>80	24
3665204	DL-LS/4F/40W/40/347/D/S	DeltaLum Linear Strip 4ft 40W 40K 347V Dimmable, with Sensor	DLC	40	347	50,000	4700	4000	>80	48
3665205	DL-LS/4F/40W/50/347/D/S	DeltaLum Linear Strip 4ft 40W 50K 347V Dimmable, with Sensor	DLC	40	347	50,000	4700	5000	>80	48
3666207	DL-LS/4F/60W/40/347/D/S	DeltaLum Linear Strip 4ft 60W 40K 347V Dimmable, with Sensor	DLC	60	347	50,000	7000	4000	>80	48
3666208	DL-LS/4F/60W/50/347/D/S	DeltaLum Linear Strip 4ft 60W 50K 347V Dimmable, with Sensor	DLC	60	347	50,000	7000	5000	>80	48

Ambient Operating Temperature -25°C ~ +40°C


For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How our Model No. Works:


Ordering Information

DL	LS	2F	20W	40	UNV	D	S
Family	Fixture Style	Length	Wattage	Colour Temperature	Voltage	Dimmable	With Sensor
DL - DeltaLum	LS - Linear Strip	2F/4F	20W/40W/60W	40 - 4000K 50 - 5000K	UNV - 120-277VAC 347 - 347VAC		

Distributed by:



Wall mounting pattern (Unit: m)
Suggested installation height: 1-1.8m



Ceiling mounting pattern (Unit: m)
Suggested installation height: 2.5-8m

Sensor Setting

By selecting the combination on the DIP switch, sensor data can be precisely set for each specific application.

Detection Area				Hold Time				Stand-by Period				Daylight Sensor				Stand-by DIM Level			
ON	1	2		3	4	5		6	7	8		9	10	11	12		13	14	
I ●	●	●	100%	I ●	●	●	5S	I ●	●	●	0S	I ○	○	●	●	2Lux	I ●	●	50%
II ○	●	○	75%	II ○	●	●	30S	II ○	●	●	5S	II ○	○	○	●	5Lux	II ○	●	30%
III ○	○	●	50%	III ●	○	●	90S	III ●	○	●	10min	III ○	●	●	○	10Lux	III ●	○	20%
IV ○	○	○	10%	IV ○	○	●	3min	IV ○	○	●	30min	IV ○	○	●	○	25Lux	IV ○	○	10%
V ○				V ●	●	○	20min	V ●	●	○	20min	V ○	●	○	○	50Lux	V ○		
VI ○				VI ○	○	○	+∞	VI ○	●	○	1h	VI ●	○	○	○	100Lux	VI ○		
VII ○				VII ○				VII ○	○	○	Disable	VII ○	○	○	○	Disable	VII ○		

Detection Area

Detection area can be reduced by selecting the combination on the DIP switches to fit precisely each application.

Hold Time

Refers to the time period the lamp remains at 100% illumination after no motion detected.

Daylight Sensor

The sensor can be set to only allow the lamp to illuminate below a defined ambient brightness threshold.

When set to Disable mode, the daylight sensor will switch on the lamp when motion is detected regardless of ambient light level.

50lux, 30lux: twilight operation, 10lux, 5lux: darkness operation only.

Note that daylight sensor is active only when lamp totally switches off.

Stand-by Period

Refers to the time period the lamp remains at a low light level before it completely switches off in the long absence of people. When set to Disable mode, the low light is maintained until motion is detected.

Stand-by DIM Level

The low light level you would like to have after the hold time in the long absence of people.