



SFV - Slip Fitter by Vertical

SSF - Square Slip Fitter

Physical Features

- White powder coated finish die cast aluminum housing prevents corrosion and looks incredible
- Long life advanced thermal dynamics and heat dissipation
- Optional Clear or Diffused lens available
- IES type II & III options for optimized light distribution
- Wide range of mounting alternatives available



Application

Parks, shopping malls, outlets, plazas, city halls, historical sites; parking lots; road lighting.

Electronic Features


- Light output from 13,200 lumen up to 33,000 lumen
- High lighting efficiency of 110 lm/W and long life span of 50,000 hours
- Stable lumen output and high lumen maintenance (L90-36,000 hour, L70-50,000 hour)
- CRI higher than 80, and IP rating IP65 (whole fixture)
- High power factor (>0.95), flickering free operation
- 0-10V dimming optional

Other information


- cUL listed and DLC listed
- 5-year limited warranty for DLC approved

Dimensions / Drawing

90W~150W Output

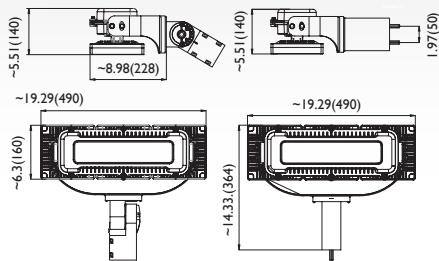

180W~300W Output

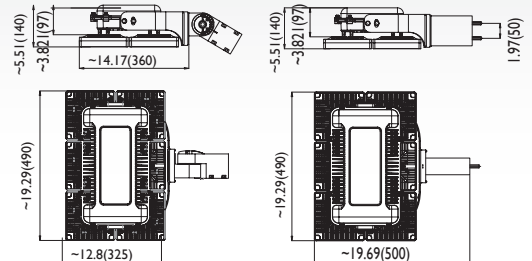

Order Code	Model Number	Description	DLC	Watts	Volts (V)	IP	Init. Lm	Av. Life L70 L90	CCT(K)	CRI	IES type	Wt (kg)	Dimensions LxWxH (mm)	CS Qty.
3687107	NXL-SB/120W/3/50/UNV/PCF/SFV	New XL 120W LED Shoebox, IES Type III, 50K, 120-277V, PC Lens Frosted, Slip Fitter by Vertical	DLC	120	120-277	65	13,200	50,000 36,000	5000	80	III	8.5	490 x 160 x 140	1
3687108	NXL-SB/150W/3/50/UNV/PCF/SFV	New XL 150W LED Shoebox, IES Type III, 50K, 120-277V, PC Lens Frosted, Slip Fitter by Vertical	DLC	150	120-277	65	16,500	50,000 36,000	5000	80	III	8.5	490 x 160 x 140	1
3687109	NXL-SB/180W/3/50/UNV/PCF/SFV	New XL 180W LED Shoebox, IES Type III, 50K, 120-277V, PC Lens Frosted, Slip Fitter by Vertical	DLC	180	120-277	65	19,800	50,000 36,000	5000	80	III	13.5	490 x 330 x 140	1
3687110	NXL-SB/240W/3/50/UNV/PCF/SFV	New XL 240W LED Shoebox, IES Type III, 50K, 120-277V, PC Lens Frosted, Slip Fitter by Vertical	DLC	240	120-277	65	26,400	50,000 36,000	5000	80	III	13.5	490 x 330 x 140	1
3688103	NXL-SB/300W/3/50/UNV/PCF/SFV	New XL 300W LED Shoebox, IES Type III, 50K, 120-277V, PC Lens Frosted, Slip Fitter by Vertical	DLC	300	120-277	65	33,000	50,000 36,000	5000	80	III	13.5	490 x 330 x 140	1

Ambient Operating Temperature -30°C ~ +50°C
For the latest stock status please refer to your price list or send us an email at sales@turolight.com

Ordering Information

NXL	SB	120W	3	50	UNV	PC	F	SFV	D
Family	Fixture Style	Wattage	IES Classification	CCT (K)	Voltage	Lens Material	Lens type	Bracket type	Dimming
	SB - Shoe Box	120W,150W 180W,240W 300W	3 - Type III	40 - 4000K 50 - 5000K	UNV - 120-277V	PC - PC	F - Frosted	SFV - Slip Fitter by Vertical SSF - Square Slip Fitter	D - 0-10V Dimming