



## Physical Features

- Lumileds luxeon LED chip
- Special housing connector plug design for easy installation and maintenance
- Independent LED lamp front housing and driver back-plate prevent the potential damage during the installation
- Better heat management
- Sealed die-casting body for durability
- Polycarbonate optical lens with UV stabilizers
- Dark Bronze Finish Color



## Application

Perimeter and security lighting for entryway/pathway of buildings


## Other information

- cUL listed and DLC listed
- 5-year limited warranty for DLC approved

## Electronic Features

- Stable lumen output and high lumen maintenance
- 45W-145W Replaces 175W-400W MH
- High CRI (80+)
- Long life span of 50,000 hours
- Dark sky friendly
- UL certified for wet locations
- High power factor (>0.90)
- Working temperature ranges from -25° to +40°
- Photocell Sensor (optional)

## Dimensions / Drawing

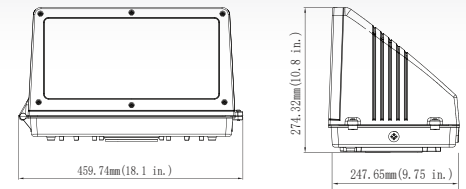


Order Code	Model Number	Description	DLC	Watts	Volts (V)	Hour Rating	Optics/ Distribution	Init. Lum.	CCT (K)	CRI	Dimensions LxWxH (inch)	Wet Loc	CS Qty.
3665110	SSL-WP3/45W/50/UNV/DB	SSL 45W LED Full Cut OffWall Pack, 50K, 120-277V, Dark Bronze	DLC	45	120-277	50,000	TYPE III	4900	5000K	82	14.21 x 8.78 x 9.25	Y	1
3665203	SSL-WP3/50W/50/347/DB	SSL 50W LED Full Cut OffWall Pack, 50K, 347V, Dark Bronze	DLC	50	347	50,000	TYPE III	5000	5000K	82	14.21 x 8.78 x 9.25	Y	1
3666108	SSL-WP3/70W/50/UNV/DB	SSL 70W LED Full Cut OffWall Pack, 50K, 120-277V, Dark Bronze	DLC	70	120-277	50,000	TYPE III	7350	5000K	82	14.21 x 8.78 x 9.25	Y	1
3666205	SSL-WP3/75W/50/347/DB	SSL 75W LED Full Cut OffWall Pack, 50K, 347V, Dark Bronze	DLC	75	347	50,000	TYPE III	7500	5000K	82	14.21 x 8.78 x 9.25	Y	1
3666109	SSL-WP3/90W/50/UNV/DB	SSL 90W LED Full Cut OffWall Pack, 50K, 120-277V, Dark Bronze	DLC	90	120-277	50,000	TYPE III	9500	5000K	82	18.1 x 10.8 x 9.75	Y	1
3666211	SSL-WP3/95W/50/347/DB	SSL 95W LED Full Cut OffWall Pack, 50K, 347V, Dark Bronze	-	95	347	50,000	TYPE III	9500	5000K	82	18.1 x 10.8 x 9.75	Y	1
3667103	SSL-WP3/135W/50/UNV/DB	SSL 135W LED Full Cut OffWall Pack, 50K, 120-277V, Dark Bronze	DLC	135	120-277	50,000	TYPE III	14000	5000K	82	18.1 x 10.8 x 9.75	Y	1
3667204	SSL-WP3/145W/50/347/DB	SSL 145W LED Full Cut OffWall Pack, 50K, 347V, Dark Bronze	-	145	347	50,000	TYPE III	14000	5000K	82	18.1 x 10.8 x 9.75	Y	1
<b>Photocell Sensor</b>													
n.a.	LC-105	Photocell Sensor, for WP1 120V application only			120								
n.a.	AA-1068M	Photocell Sensor, for WP1 277V & 347V application only*			185-305								
n.a.	JL-403C	Photocell Sensor, for WP1 UNV & 347V application only*			120-277								

\* Only applicable with 347V to 277V stepdown transformer


Ambient Operating Temperature -25°C ~ +40°C

For the latest stock status please refer to your price list or send us an email at [sales@turolight.com](mailto:sales@turolight.com)

### Wiring instruction (With Photocell)

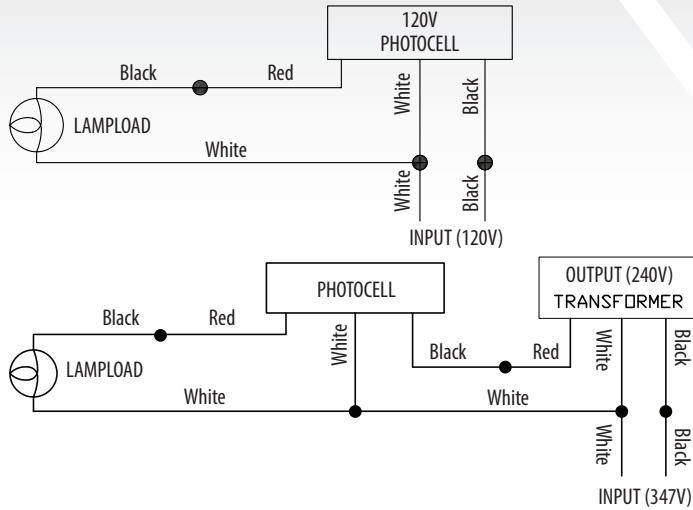

### Photocell

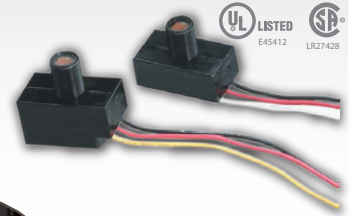

How our Model No. Works:

### Ordering Information

SSL	WP3	45W	50	UNV	BK	PS
Family	Fixture Style	Wattage	Colour Temperature	Voltage	Body Finish	Sensor Option
	WP3 - Full Cut Off Wall Pack	45W/50W 70W/75W 90W/95W 135W/145W	50 - 5000K	UNV - 120-277V 347 - 347V	DB - Dark Bronze	PS - Photocell Sensor

Distributed by: