



Key Features

- NSF/ANSI 2 Certified Shatter Shield prevents and protects in case of breakage
- 9W~14.5W with 1150/2100lm
- DLC Listed
- Suitable for splash zones of food equipment
- External ballast not required
- High CRI (83+)
- 50,000 hour life
- Replacement for T8 linear fluorescent
- Excellent distribution with 180° beam angle
- Fits into existing linear fixtures



Conforms to NSF/ANSI 2

Other information

- Sockets must be non shunted
- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant
- 5-year limited warranty for DLC approved lamps / 3-year limited warranty for non-DLC in commercial and residential use


Applications

- Offices
- Hospitality
- Retail
- Shopping Malls
- Restaurants

General Usage

- Ideal replacement of Fluorescent T8 & T12 tubes

Dimensions

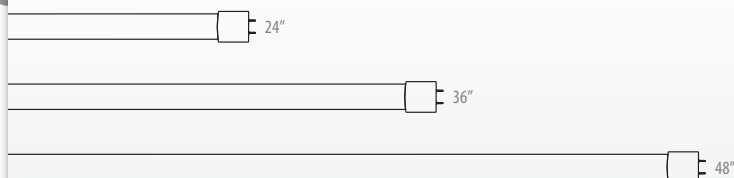

Order Code	Model Number	Description	DLC	Watts	Base	Voltage (V)	Initial Lumens	Beam Angle	CCT (K)	CRI	MOL (in)	CS QTY
Linear Tubes (Shatterproof)												
1762771	VIV-T8BPSP4/9W/30/F	T8 Bypass 2ft 9W G13 30K Frost Shatterproof DLC4.0		9	G13	120-277	1150	180°	3000	83	24	25
1762356	VIV-T8BPSP4/9W/35/F	T8 Bypass 2ft 9W G13 35K Frost Shatterproof DLC4.0		9	G13	120-277	1200	180°	3500	83	24	25
1762853	VIV-T8BPSP4/9W/40/F	T8 Bypass 2ft 9W G13 40K Frost Shatterproof DLC4.0		9	G13	120-277	1200	180°	4000	83	24	25
1762534	VIV-T8BPSP4/9W/50/F	T8 Bypass 2ft 9W G13 50K Frost Shatterproof DLC4.0		9	G13	120-277	1250	180°	5000	83	24	25
1762296	VIV-T8BPSP4/12W/30/F	T8 Bypass 3ft 12W G13 30K Frost Shatterproof	-	12	G13	120-277	1200	180°	3000	83	36	25
1762311	VIV-T8BPSP4/12W/35/F	T8 Bypass 3ft 12W G13 35K Frost Shatterproof	-	12	G13	120-277	1200	180°	3500	83	36	25
1762484	VIV-T8BPSP4/12W/40/F	T8 Bypass 3ft 12W G13 40K Frost Shatterproof	-	12	G13	120-277	1200	180°	4000	83	36	25
1762514	VIV-T8BPSP4/12W/50/F	T8 Bypass 3ft 12W G13 50K Frost Shatterproof	-	12	G13	120-277	1300	180°	5000	83	36	25
1762746	VIV-T8BPSP4/12.5W/30/F	T8 Bypass 4ft 12.5W G13 30K Frost Shatterproof DLC4.0		12.5	G13	120-277	1650	180°	3000	83	48	25
1762342	VIV-T8BPSP4/12.5W/35/F	T8 Bypass 4ft 12.5W G13 35K Frost Shatterproof DLC4.0		12.5	G13	120-277	1650	180°	3500	83	48	25
1762833	VIV-T8BPSP4/12.5W/40/F	T8 Bypass 4ft 12.5W G13 40K Frost Shatterproof DLC4.0		12.5	G13	120-277	1750	180°	4000	83	48	25
1762527	VIV-T8BPSP4/12.5W/50/F	T8 Bypass 4ft 12.5W G13 50K Frost Shatterproof DLC4.0		12.5	G13	120-277	1800	180°	5000	83	48	25
1763231	VIV-T8BPSP4/14.5W/30/F	T8 Bypass 4ft 14.5W G13 30K Frost Shatterproof DLC4.0		14.5	G13	120-277	1900	180°	3000	83	48	25
1763313	VIV-T8BPSP4/14.5W/35/F	T8 Bypass 4ft 14.5W G13 35K Frost Shatterproof DLC4.0		14.5	G13	120-277	1950	180°	3500	83	48	25
1763432	VIV-T8BPSP4/14.5W/40/F	T8 Bypass 4ft 14.5W G13 40K Frost Shatterproof DLC4.0		14.5	G13	120-277	2000	180°	4000	83	48	25
1763512	VIV-T8BPSP4/14.5W/50/F	T8 Bypass 4ft 14.5W G13 50K Frost Shatterproof DLC4.0		14.5	G13	120-277	2100	180°	5000	83	48	25

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

How to read: VIV / T8 BP SP4 / 9W / 30 / F

Distributed by: