

LED Flush Mount (2 Ring)



28w = 180w*
*Replace two 90 watt incandescent

Key Features

- 1500~2000 High Lumens
- Multi-faceted fixture interior engineered to maximize LED module performance
- LED module designed to deliver maximum light levels to work surface without fixture glare
- High CRI (80+)
- 50,000 Hour average life
- Reduces energy consumption up to 80%
- No UV, no infrared and mercury free



Applications

- Bedrooms
- Living rooms
- Hallways
- Kitchens
- Use anywhere a standard incandescent fixture is used

Other information

- Operating temperature range between -20°C and +50°C
- UL/cUL listed, FCC compliant
- 5-year limited warranty in commercial and residential use


Construction

- Formed fixture pan with access holes to junction box
- Aluminum LED module tray directs heat away from electronic components
- Tool-less access to fixture components with removal of 3 decorative nuts
- Brushed Nickel finish compliments any space

Order Code	Model Number	Description	ES	Watts	Volts (V)	Hour Rating	Lumens	CCT (K)	CRI	Damp Loc	M.O.D (inch)	Case Qty.
3684102	RGD-FM14/21W/30/D/2R	LED Flush Mount 14" 21W 3000K 2 Ring		21	120	50,000	1500	3000	80	Y	14	6
3684103	RGD-FM14/21W/40/D/2R	LED Flush Mount 14" 21W 4000K 2 Ring		21	120	50,000	1500	4000	80	Y	14	6
3684104	RGD-FM18/28W/30/D/2R	LED Flush Mount 18" 28W 3000K 2 Ring		28	120	50,000	2000	3000	80	Y	18	4
3684105	RGD-FM18/28W/40/D/2R	LED Flush Mount 18" 28W 4000K 2 Ring		28	120	50,000	2000	4000	80	Y	18	4

For the latest stock status please refer to your price list or send us an email at sales@turolight.com

Dimensions

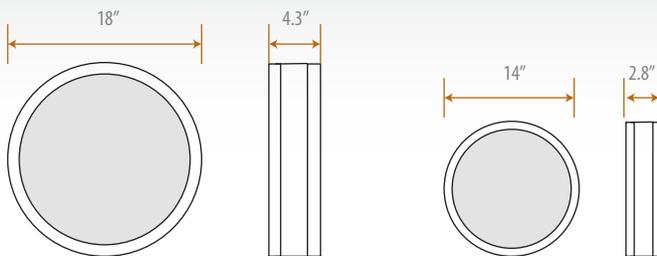

Distributed by: