

LED FIXTURE

RIGID series


Round Frame

Square Frame



LED MULTI SPOTLIGHT

Design for accent lighting, general lighting and vertical lighting

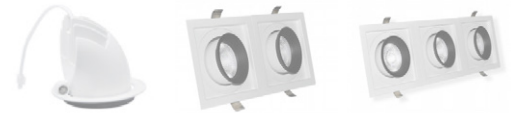

RGD-LAD/6/22W/120/30K/38/RD/D/WH



Features & Benefits

Anti-glare design, square frame optional	Up to 100lm/W
Beam angle: 24°, 38°, 60° and 80°x45°	350° gimbal and 50° adjustable
Ultra low glare light with shielding angle 15°	High power factor over 0.95
High CRI 82+	Type Non IC, for commercial new construction building


Warranty

5-year limited warranty in commercial use from the date of purchase
Operating temperature range between -20°C and +40°C
Energy Star, ETL listed

Applications

Residential, Retail, Art Gallery, Museum, Automotive and Parking, Hospitality, Offices and Banks, etc.

Dimensional drawing

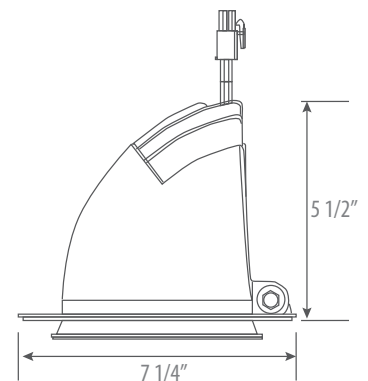


Product Specification

Energy Star	Model Number	Size*	Wattage (W)	Input Voltage (V)	CCT Optial	Beam Angle	Power Factor	Dimmable	Lumen Flux	CRI Optial
Yes	RGD-LAD/6/22W/120/30K/38/RD/D/WH	6" DIA	22	120	3000K	24°, 38°, 60°, 80°x45°	>0.95	Triac/ELV(option)	2050lm	CRI82
	RGD-LAD/SQ	Square frame 6.88" x 6.88", square frame sold separately (field install)								
	RGD-LAD/JOINER	1 set per square frame								


*Cut out 6 11/16"

Docking

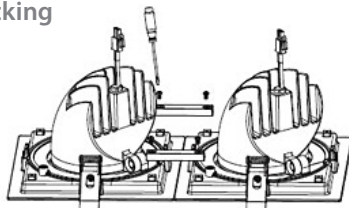

Make sure the frame are at the same direction.
Screw the docking blocks to fix the frame

Finished

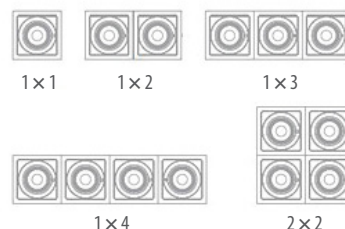

Round Spotlight

Ordering Information

Example: RGD-LAD/6/22W/120/30K/38/RD/D/WH

FAMILY NAME	FIXTURE TYPE	SIZE	WATTAGE	INPUT VOLTAGE (V)	CCT	BEAM ANGLE	FRAME	DIMMABLE	COLOR FINISH
RGD (Rigid)	LAD (Linkable, Adjustabl Downlight)	6 (6")	22W	120	30K	38	RD (Round)	D	WH (White)
							SQ (Square)		