

LED FIXTURE

TL Series



LED Emergency

TL-EM001

Twin Head LED Emergency Light



Features & Benefits

Injection-molded thermoplastic housing

Easy installation

Ni-cd battery backup for 90 minutes

Universal (wall, ceiling) mounting

2W x 2 SMD LED adjustable heads


120/347VAC input voltage

cUL listed / IP20

Test switch and charge indicator light

UL-94V-0 flame rating, fire-retardant

Dimensional Drawing

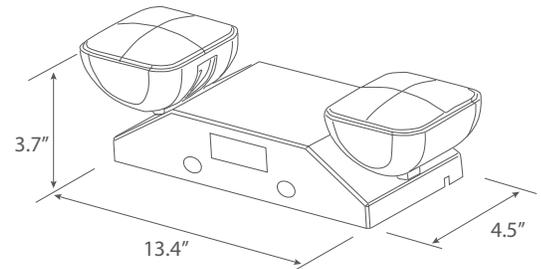

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -10°C and +40°C

Ordering Information Example: TL-RMES003

Family Name	Fixture Type	Model
TL (Turolight)	EM (Emergency Light)	001 (Twin Head LED Emergency Light)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	Mounting	Self Powered Battery	Damp Location	Dimensions LxW (inch)	Case QTY.
3461211	TL-EM001	Twin Head LED Emergency - AC only	4W	120/347VAC	wall, ceiling	Yes (90 minutes)	Yes	13.4x4.5	6