

LED FIXTURE

SSL Series



LED Canopy SSL-CP2

Ultra-thin design allows for use in low ceiling applications.



Features & Benefits

CUL listed, DLC qualified	PIR sensor, emergency battery optional
Available with lumen outputs from 3,800 to 8,000 lumens	Voltage 120-277V/347-480V, support 0-10V dimmable*
System light efficacy ≥ 133 lm / W	CRI ≥ 70 , L70 @ 50,000 Hrs
Ultra light design, black body finish	Suitable for J-BOX mounting, and pendant mounting
Wet location listed	PC Lens clear

* For details, see product specification below

Warranty

5-year limited warranty in commercial use from the date of purchase
Operating temperature range between -40°C and +40°C

Applications


Parking structures, storage areas, shopping area walkways, entryway, and low level security

Product Specification


Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension LxWxH(inch)	Case QTY.
3664125	Y	SSL-CP2/27W/50/UNV/BK	27W, 50K, 120-277V, Black	25	120-277	50,000	H160° x V160°	3800	5000K	70	9.52 x 9.52 x 3.19	1
3664126	Y	SSL-CP2/27W/50/UNV/BK/D	27W, 50K, 120-277V, Black, 0-10V Dimming	25	120-277	50,000	H160° x V160°	3800	5000K	70	9.52 x 9.52 x 3.19	1
3665139	Y	SSL-CP2/40W/50/UNV/BK	40W, 50K, 120-277V, Black	40	120-277	50,000	H160° x V160°	5450	5000K	70	9.52 x 9.52 x 3.19	1
3665140	Y	SSL-CP2/40W/50/UNV/BK/D	40W, 50K, 120-277V, Black, 0-10V Dimming	40	120-277	50,000	H160° x V160°	5450	5000K	70	9.52 x 9.52 x 3.19	1
3665228	Y	SSL-CP2/40W/50/HVU/BK/D	40W, 50K, 347-480V, Black, 0-10V Dimming	40	347-480	50,000	H160° x V160°	5450	5000K	70	9.52 x 9.52 x 3.19	1
3666125	Y	SSL-CP2/60W/50/UNV/BK	60W, 50K, 120-277V, Black	60	120-277	50,000	H160° x V160°	8000	5000K	70	9.52 x 9.52 x 3.19	1
3666126	Y	SSL-CP2/60W/50/UNV/BK/D	60W, 50K, 120-277V, Black, 0-10V Dimming	60	120-277	50,000	H160° x V160°	8000	5000K	70	9.52 x 9.52 x 3.19	1
3666231	Y	SSL-CP2/60W/50/HVU/BK/D	60W, 50K, 347-480V, Black, 0-10V Dimming	60	347-480	50,000	H160° x V160°	8000	5000K	70	9.52 x 9.52 x 3.19	1

Dimensional drawing

Net Weight: 27W: 3.615lb 40W: 4.166lb

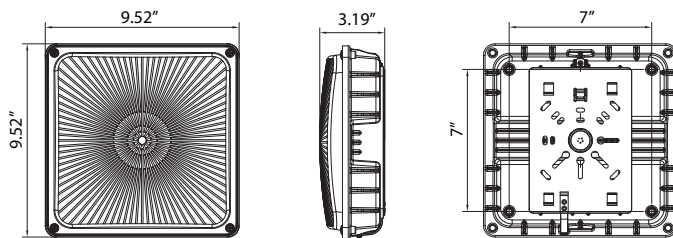

Net Weight: 60W: 5.070lb

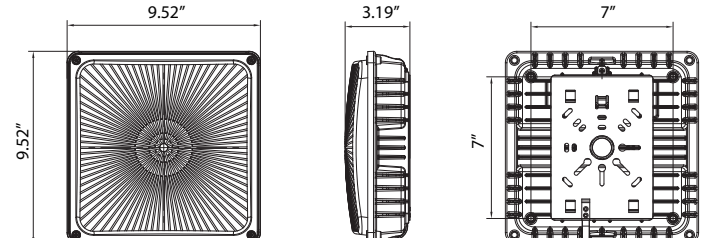

Ordering Information Example: SSL-CP2/27W/50/UNV/BK/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Dimmable	Options
SSL (Solid State Lighting)	CP2 (LED Canopy)	25W, 40W, 60W	50 (5000K)	UNV (120~277V), HVU (347~480V)	BK (Black)	D (Dimmable), Blank (Non-Dimmable)	TL-2052 (Sensor)