



Key Features

Running Man LED & Emergency

- Ultra bright, energy efficient, long lasting white LED provides even, fully illuminated panel
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution (TL-RMES001A, TL-RMES001AN, TL-RMES000A)
- Adjustable LED lamp heads provides optimal center-to-center spacing. Optional high-lumen heads are available for increased center-to-center spacing (TL-RMES002A)

LED Emergency

- Long lasting, efficient, ultra bright white LED lamp heads
- High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- Adjustable LED lamp heads provide optimal center-to-center spacing. High-lumen option available for increased center-to-center spacing

Electrical

- Dual 120/347V - Running Man
- Dual 120/277V (optional 120/347V) - LED Emergency
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for mini 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours



Housing

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes


Mounting

- Universal K/O pattern on back plate for wall mount
- EZ-snap mounting canopy included for top or end mount
- Field selectable, universal directional indication provided with three (Right, Left and No Arrow) pictogram legends


Others

- 5 years warranty
- Meets UL924, NFPA 101 life Safety Code. NEC, OSHA, Local and State Codes
- CSA listed for damp location (0°C - 50°C)
- CUL listed for TL-RMES001AN
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment


Dimensions / Drawing

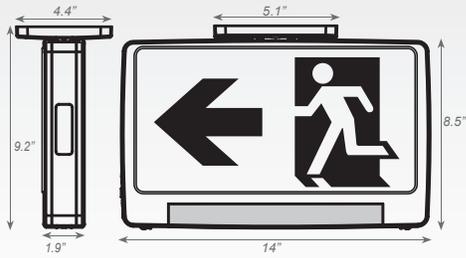


TL-RMES002ALP

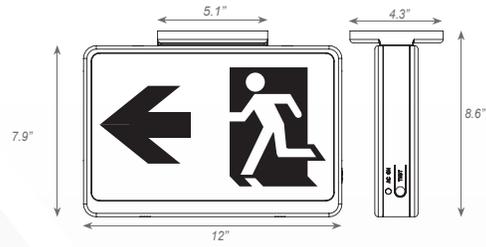


TL-RMES001A, TL-RMES000A

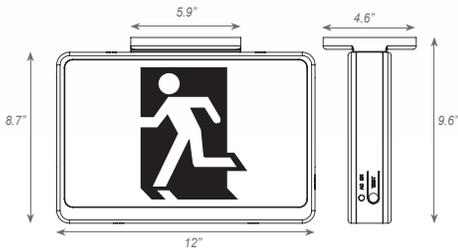

TL-RMES001AN

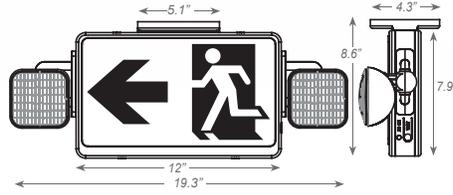

TL-RMES002A

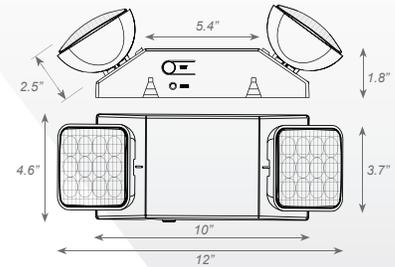

TL-EM000

Order Code	Model Number	Description	Watt	Volts (V)	Mounting	Damp Loc	Remote Capable	Battery Back up	Dimensions L×H(inch)	CS Qty.
Running Man LED										
3461203	TL-RMES001A	Running Man LED Exit Sign, Double Face, White Housing, Battery Back up	4.4W	120/347	Wall,Side,Ceiling	Y	-	Y	12.0×7.9	6
3461204	TL-RMES000A	Running Man LED Exit Sign, Double Face, White Housing, AC only	4.4W	120/347	Wall,Side,Ceiling	Y	-	-	12.0×7.9	6
3461205	TL-RMES002ALP	Running Man Lightpipe LED Exit Sign & Emergency Combo, Double Face, White, Remote Capable	4.4W	120/347	Wall,Side,Ceiling	Y	Y	Y	14.0×9.2	6
3461206	TL-RMES002A	Running Man All LED Exit Sign & Emergency Combo, Double Face, White, Remote Capable	4.4W	120/347	Wall,Ceiling	Y	Y	Y	19.3×7.9	6
3461209	TL-RMES001AN	Running Man LED Exit Sign, Double Face, White Housing, Battery Back up	4.4W	120/347	Wall,Side,Ceiling	Y	-	Y	12.0×8.7	6
LED Emergency										
3461111	TL-EM000	LED Emergency Unit, White	2W	120/277	Wall,Ceiling	Y	-	Y	12.0×4.6	6

For damp locations (-10°C ~ +50°C)

Distributed by: