

LED LAMP

VIVID Series




VIV-BR40, VIV-BR30, VIV-BR20

Features & Benefits

Energy Star listed	25,000 hour average life
High CRI (80+), dimmable	Enclosed fixture application*
13W replaces 75W incandescent	Damp location approved
9W replaces 45W incandescent	
8W replaces 35W incandescent	

Dimensional drawing

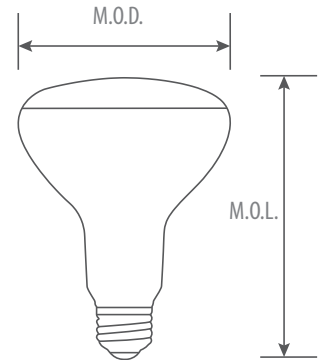

Warranty & Cautions

3-year limited warranty
Operating temperature range between -20°C and +40°C
UL/cUL listed, FCC compliant, RoHS compliant

* For applicable models, see product specification below

Product Specification

Ordering Code	ES	Model Number	Watts	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	CRI	Enclosed Fixture Application	Damp LOC.	M.O.D. (inch)	M.O.L. (inch)	Case QTY.
1752103	Y	VIV-BR30/9W/27/D	9	45W	E26	120	25,000	100°	650	2700	80	-	-	3.76	5.2	24
1752212	Y	VIV-BR30/9W/30/D	9	45W	E26	120	25,000	100°	650	3000	80	-	-	3.76	5.2	24
1752410	Y	VIV-BR30/9W/40/D	9	45W	E26	120	25,000	100°	650	4000	80	-	-	3.76	5.2	24
1752102	Y	VIV-BR40/13W/27/D	13	75W	E26	120	25,000	120°	1050	2700	80	-	Y	4.72	6.3	10
1762136	-	VIV-BR20/8W/27/D	8	35W	E26	120	25,000	120°	450	2700	80	Y	Y	2.48	3.7	20
1762813	-	VIV-BR20/8W/40/D	8	35W	E26	120	25,000	120°	450	4000	80	Y	Y	2.48	3.7	20

Ordering Information Example: VIV-BR20/9W/27/D

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)	DIMMABLE
VIV (Vivid)	BR40	13W	27 (2700K)	D (dimmable)
	BR30	9W	30 (3000K)	Blank (non dimmable)
	BR20	8W	40 (4000K)	