



VIV-A19, MR16, PAR20/DTW



Features & Benefits


Wider color dimming range from 2200K up to 3000K
 3 DTW products fit into different fixtures, providing a full range of lighting performance from functional to relaxation

15,000 hour average life
 High CRI (80+)
 Damp location rated

Warranty & Cautions

2-year limited warranty from the date of purchase
 Operating temperature range between -20°C and +45°C
 cETL, UL/cUL listed, FCC compliant, RoHS compliant

Dimensional drawing

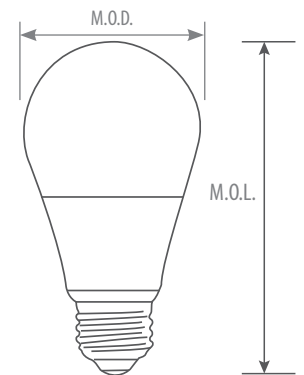

Product Specification

Ordering Code	Model Number	Watts	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Initial Lumens(lm)	CCT(K)	CRI	Damp Location	M.O.D. (inch)	M.O.L. (inch)	Case QTY.
1752000	VIV-A19/DTW/8W/30/22	8	60W	E26	120	15,000	800	2200-3000	80	Y	2.36	4.40	40
1752001	VIV-MR16/DTW/5.5W/30/22/GU10	5.5	50W	GU10	120	15,000	450	2200-3000	80	Y	1.97	2.17	50
1752002	VIV-PAR20/DTW/6.5W/30/22	6.5	50W	E26	120	15,000	500	2200-3000	80	Y	2.47	3.46	50

Ordering Information Example: VIV-A19/DTW/8W/30/22

LED CLASS	LAMP TYPE	WATTAGE	SPECIAL	CCT (K)	BASE
VIV (Vivid)	A19, MR16, PAR20	5.5W, 6.5W, 8W	DTW (dim to warm)	30/22 (3000K - 2200K)	Blank (E26) Gu10