

LED Full Cutoff Wall Pack



SSL-WP3T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-150W)	2,575-18,400lm

Features

- Modern Design Compact Wallpack with Glass diffuser for long life.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +40 °C.
- Field Selectable (CCT 3000K, 4000K & 5000K) and wattage (25W - 60W in 60M & 90W - 150W in 150L model).
- Efficacy of ≥ 120 lm/W with 120-347V LED Auto-Sensing driver

Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

UV Resistant Glass Cover

Mounting:

Surface Mounting

Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of -40 °C ~ +40 °C


LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 120 lm/w.

Controls:

Compatible with 0-10V Dimming, Photocell Sensor.

Dimensional Drawing

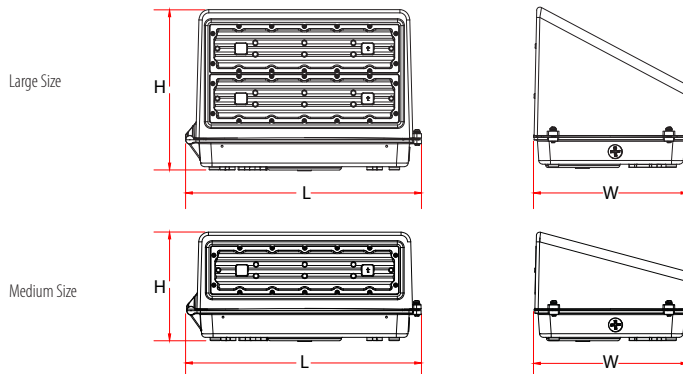


Medium Size



Large Size



Polar Candela

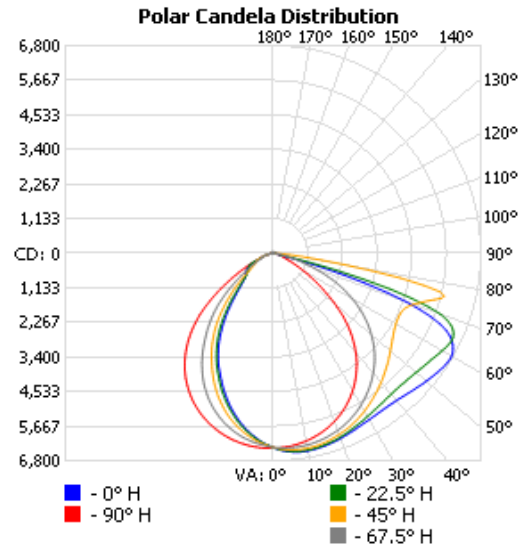

Applications



Malls



Hotels



Industry



Office Complex

LED Full Cutoff Wall Pack



SSL-WP3T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (25W-150W)	2,575-18,400lm

Ordering Information Example: SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB

Family Name	Fixture Type	Type	Wattage	CCT	Voltage	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP3T (LED full cutoff wall pack)	60M (Max. 60W, medium size) 150L (Max. 150W, large size)	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT) 22 (2200)	120-347V	D (Dimmable)	PC (Photocell)	DB (Dark bronze) BK (Black)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	L70-Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680302	Y	SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB	60-40-25	120-347V	50,000	7800-5200-3250	30-40-50	≥80	Yes	14.17"×9.29"×6.54"	1
3680377	Y	SSL-WP3T/60M/MW/22/120-347V/D/PC/BK	60-40-25	120-347V	50,000	6300-4200-2575	2200	≥80	Yes	14.17"×9.29"×6.54"	1
3680303	Y	SSL-WP3T/150L/MW/MK/120-347V/D/PC/DB	150-120-90	120-347V	50,000	18400-15600-11700	30-40-50	≥80	Yes	14.17"×9.29"×9.65"	1
3682208	Y	SSL-WP3T/60M/MW/MK/120-347V/D/PC/BK	60-40-25	120-347V	50,000	7800-5200-3250	30-40-50	≥80	Yes	14.17"×9.29"×6.54"	1
3682209	Y	SSL-WP3T/150L/MW/MK/120-347V/D/PC/BK	150-120-90	120-347V	50,000	18400-15600-11700	30-40-50	≥80	Yes	14.17"×9.29"×9.65"	1

Related Products



SSL-XHC2



SSL-WP1TS



SSL-WP2T



DL-VT2