

LED FIXTURE

SSL Series

LED Linear High Bay SSL-LHB

Offering quality lighting and excellent energy savings compared to linear fluorescent and HID high bay fixtures.



With Sensor



Features & Benefits

CUL listed, DLC*

Available with lumen outputs from 12,000 to 24,000 lumens

Power factor >0.9. 0-10V dimmable standard

Damp location rated

LM-80 certified high performance and reliable Osram and Lumileds LEDs.

Formed steel housing with white powder coat finish

Bi-level PIR Sensor and Remote optional

120° Beam spread

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -40°C and +55°C

* DLC under qualifying process Q2, 2018

Applications

Warehouse, Factory, Convention Center, Gymnasium etc.

Dimensional drawing

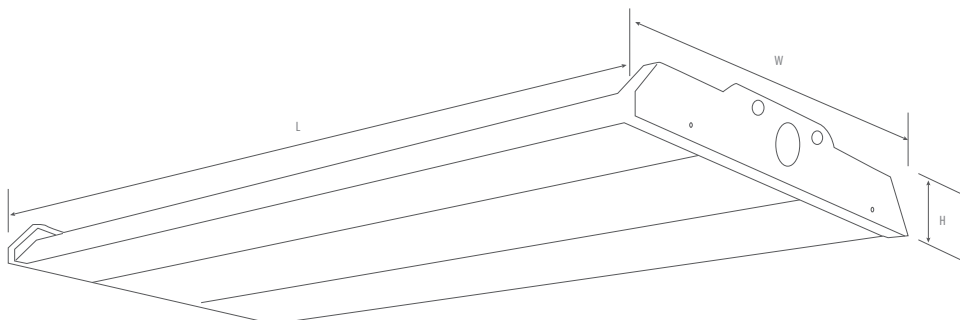

	L	W	H
90W	23.9"	10.3"	1.8"
130W, 180W, 190W	23.9"	19.7"	1.8"



LED Linear High Bay

SSL-LHB

Ordering Information Example: SSL-LHB/90W/40/UNV/AC/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable	Options
SSL (Solid State Lighting)	LHB (Linear High Bay)	90W 130W 180W/190W*	40 (4000K) 50 (5000K)	UNV (120-277V) HVU (347/480V)	AC (Air Craft Cable Mount)	D (Dimmable)	SSL-FL/SB/UNV/PIR (PIR sensor integral indoor / outdoor application)** TL-2060/BX (PIR sensor external use)** TL-2060-RC (Remote control)

* 180W UNV (120-277V) only, 190W HVU (347/480V) only

** Lens options available

L1 (360° lens, maximum coverage 48' diameter from 20' height)

H2 (360° lens, maximum coverage 60' diameter from 40' height)

I.E. SSL-FL/SB/UNV/PIR/L1 or TL-2060/BX/H2

Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension LxWxH(inch)	Case QTY.
3666121	Y	SSL-LHB/90W/40/UNV/AC/D	90	120-277V	50,000	11,700	4000	>80	23.92x10.31x1.83	1
3666122	Y	SSL-LHB/90W/50/UNV/AC/D	90	120-277V	50,000	11,700	5000	>80	23.92x10.31x1.83	1
3666226	Y	SSL-LHB/90W/40/HVU/AC/D	90	347/480V	50,000	11,700	4000	>80	23.92x10.31x1.83	1
3666227	Y	SSL-LHB/90W/50/HVU/AC/D	90	347/480V	50,000	11,700	5000	>80	23.92x10.31x1.83	1
3667111	Y	SSL-LHB/130W/40/UNV/AC/D	130	120-277V	50,000	17,000	4000	>80	23.92x19.69x1.83	1
3667112	Y	SSL-LHB/130W/50/UNV/AC/D	130	120-277V	50,000	17,000	5000	>80	23.92x19.69x1.83	1
3667213	Y	SSL-LHB/130W/40/HVU/AC/D	130	347/480V	50,000	17,000	4000	>80	23.92x19.69x1.83	1
3667214	Y	SSL-LHB/130W/50/HVU/AC/D	130	347/480V	50,000	17,000	5000	>80	23.92x19.69x1.83	1
3667113	Y	SSL-LHB/180W/40/UNV/AC/D	180	120-277V	50,000	23,500	4000	>80	23.92x19.69x1.83	1
3667114	Y	SSL-LHB/180W/50/UNV/AC/D	180	120-277V	50,000	23,500	5000	>80	23.92x19.69x1.83	1
3667215	Y	SSL-LHB/190W/40/HVU/AC/D	190	347/480V	50,000	23,800	4000	>80	23.92x19.69x1.83	1
3667216	Y	SSL-LHB/190W/50/HVU/AC/D	190	347/480V	50,000	23,800	5000	>80	23.92x19.69x1.83	1
		SSL-FL/SB/UNV/PIR	PIR sensor 0-10V integral indoor/ outdoor application (remote programming tool required)							
		TL-2060/BX	PIR sensor external use							
		TL-2060-RC	Wireless remote control							