

LED FIXTURE

RIGID Series



LED Centre Basket

RGD-CB

Recessed commercial grade lay-in luminaire, clean contemporary low glare design, incorporating switchable CCT.



Features & Benefits

110-347V LED auto-sensing driver

Switchable CCT (30K/ 35K/ 40K)*

PMMA lens offers clean look low glare

Range of sizes (1'x4', 2'x2', 2'x4' available)

High quality metal construction in white powder coat finish

* 50K for specific applications available

L70 @ 50,000 Hrs

0-10V Dimmable

High CRI (80+)

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and +40°C

Applications

Commercial/ Industrial/ Retail location

For use in Offices, Stores, Schools, Medical building where ever quality light is required.

Dimensional drawing

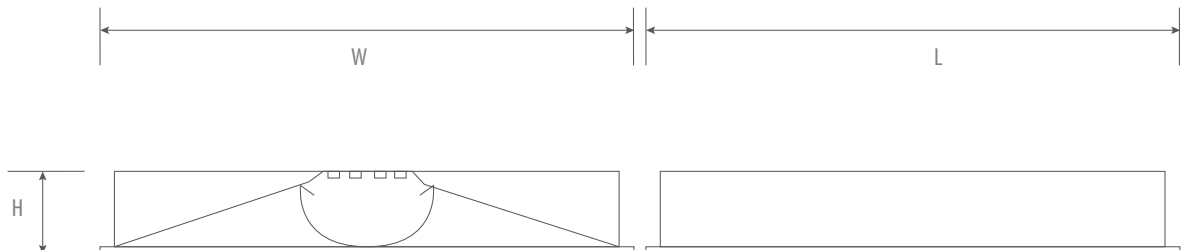

	L	W	H
2'x2'	23 3/4"	23 3/4"	2 3/4"
2'x4'	47 3/4"	23 3/4"	2 3/4"
1'x4'	47 3/4"	11 3/4"	2 3/4"



LED Centre Basket

RGD-CB

Ordering Information Example: RGD-CB/22/24W/MULTI-K/110-347V

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Options
RGD (Rigid)	CB (Centre Basket)	22 (2'x2')	24W 30W	MULTI-K (Multiple CCT, 30K/35K/40K Switchable) 50 (50K)	110-347V	
		14 (1'x4')	30W			
		24 (2'x4')	37W 50W			

Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3664200	RGD-CB/22/24W/MULTI-K/110-347V	24	110-347V	50,000	3,100	30K,35K,40K	>80	24X24	1
3664201	RGD-CB/22/30W/MULTI-K/110-347V	30	110-347V	50,000	3,700	30K,35K,40K	>80	24X24	1
3665219	RGD-CB/24/37W/MULTI-K/110-347V	37	110-347V	50,000	4,500	30K,35K,40K	>80	24X48	1
3665220	RGD-CB/24/50W/MULTI-K/110-347V	50	110-347V	50,000	6,000	30K,35K,40K	>80	24X48	1
3664202	RGD-CB/22/30W/50/110-347V	30	110-347V	50,000	3,700	50K	>80	24X24	1
3665221	RGD-CB/24/50W/50/110-347V	50	110-347V	50,000	6,000	50K	>80	24X48	1
3664300	RGD-CB/14/30W/MULTI-K/110-347V	30	110-347V	50,000	3,930	30K,35K,40K	>80	12X48	1