

LED FIXTURE

SSL Series



LED Canopy SSL-CP1

Offers maximum light output for general purpose area and security lighting, efficiently deliver lumens, and consume less energy than traditional MH technologies



Features & Benefits

CUL listed, DLC	Pendant or surface mount
Available with lumen outputs from 4,200 to 6,700 lumens	Voltage 120-277V/347V, support 0-10V dimmable*
LM-80 certified high performance and reliable CREE COB LEDs	CRI≥70*, L70 @ 50,000 Hrs
Die-cast aluminum housing with black Colour body finish	PC Lens clear or frost optional
Wet location rated	

* For details, see product specification below

Warranty

5-year limited warranty in commercial use from the date of purchase
Operating temperature range between -40°C and +40°C


Product Specification

Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3665126	Y	SSL-CP1S/45W/50/UNV/BK	SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black	45	120-277	50,000	H160° x V160°	5300	5000K	70	9.57 x 9.57 x 3.07	1
3665116	Y	SSL-CP1/45W/50/UNV/BK/D	SSL 45W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable	45	120-277	50,000	H160° x V160°	4200	5000K	70	9.57 x 9.57 x 3.07	1
3665201	Y	SSL-CP1/45W/50/347/BK/D	SSL 45W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable	45	347	50,000	H160° x V160°	4200	5000K	70	9.57 x 9.57 x 3.07	1
3666114	Y	SSL-CP1/65W/50/UNV/BK/D	SSL 65W LED Canopy Light, 50K, 120-277V, Ultra Thin, Black, Dimmable	65	120-277	50,000	H160° x V160°	6600	5000K	70	9.57 x 9.57 x 3.07	1
3666209	Y	SSL-CP1/65W/50/347/BK/D	SSL 65W LED Canopy Light, 50K, 347V, Ultra Thin, Black, Dimmable	65	347	50,000	H160° x V160°	6700	5000K	70	9.57 x 9.57 x 3.07	1

Applications

Parking structures, storage areas, shopping area walkways, entryway, and low level security

Dimensional drawing

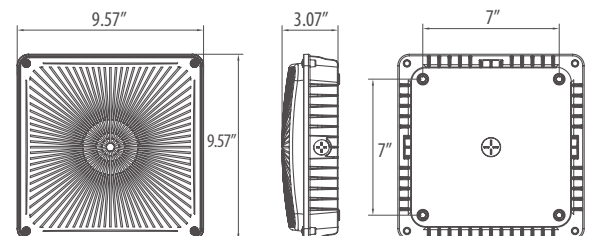

Ordering Information

Example: SSL-CP1/45W/50/UNV/BK/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Dimmable
SSL (Solid State Lighting)	CP1 (Canopy) CP1S (High Lumen Canopy)	65W 45W	50 (5000K)	UNV (120~277V) 347 (347V)	BK (Black)	D(Dimmable) Blank (Non-Dimmable)