



**LED FIXTURE**

SSL Series



90W~145W



45W~75W

# Full Cutoff LED Wall Pack

## SSL-WP3

Enhanced LED performance in a classic design, offer maximum light output for general purpose area and security lighting.



### Features & Benefits

CUL listed, DLC

Available with lumen outputs from 3,400 to 16,400 lumens

LM-80 certified high performance and reliable lumileds LEDs

Die-cast aluminum with durable dark bronze coat finish

Wet location rated

Junction box or wall mounted directly

CRI≥82, L70 @ 50,000 Hrs

Voltage 120-277V/347V

Photocell Sensor optional

### Warranty


5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +50°C

### Applications

Security, pathway and perimeter lighting, Building entryways and walkways

### Product Specification

Ordering Code	DLC	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3665110	Y	SSL-WP3/45W/50/UNV/DB	45W Full Cut Off, 50K, 120-277V, Dark Bronze	45	120-277	50,000	TYPE III	4900	5000K	82	14.21 x 8.78 x 9.25	1
3665203	Y	SSL-WP3/50W/50/347/DB	50W Full Cut Off, 50K, 347V, Dark Bronze	50	347	50,000	TYPE III	5000	5000K	82	14.21 x 8.78 x 9.25	1
3666108	Y	SSL-WP3/70W/50/UNV/DB	70W Full Cut Off, 50K, 120-277V, Dark Bronze	70	120-277	50,000	TYPE III	7350	5000K	82	14.21 x 8.78 x 9.25	1
3666205	Y	SSL-WP3/75W/50/347/DB	75W Full Cut Off, 50K, 347V, Dark Bronze	75	347	50,000	TYPE III	7500	5000K	82	14.21 x 8.78 x 9.25	1
3666109	Y	SSL-WP3/90W/50/UNV/DB	90W Full Cut Off, 50K, 120-277V, Dark Bronze	90	120-277	50,000	TYPE III	9500	5000K	82	18.1 x 10.8 x 9.75	1
3666211	-	SSL-WP3/95W/50/347/DB	95W Full Cut Off, 50K, 347V, Dark Bronze	95	347	50,000	TYPE III	9500	5000K	82	18.1 x 10.8 x 9.75	1
3667103	Y	SSL-WP3/135W/50/UNV/DB	135W Full Cut Off, 50K, 120-277V, Dark Bronze	135	120-277	50,000	TYPE III	14000	5000K	82	18.1 x 10.8 x 9.75	1
3667204	-	SSL-WP3/145W/50/347/DB	145W Full Cut Off, 50K, 347V, Dark Bronze	145	347	50,000	TYPE III	14000	5000K	82	18.1 x 10.8 x 9.75	1
3660000		LC-105	Photocell Sensor, for Wall Pack 120V application only								Photocell	
		AA-1068M	Photocell Sensor, for Wall Pack 277V & 347V application only <sup>1</sup>									
		JL-403C	Photocell Sensor, for Wall Pack UNV & 347V application only <sup>1</sup>									

<sup>1</sup> Only applicable with 347V to 277V stepdown transformer

# Full Cutoff LED Wall Pack


## SSL-WP3

### Ordering Information Example: SSL-WP3/45W/50/UNV/DB


Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Mounting	Options
SSL (Solid State Lighting)	WP3 (Full Cutoff Wall Pack)	50W, 45W 75W, 70W 95W, 90W 145W, 135W	50 (5000K)	UNV (120-277V) 347V	DB (Dark Bronze)	Wall	Photocell Sensor

### Dimensional Drawing

45W~75W OUTPUT

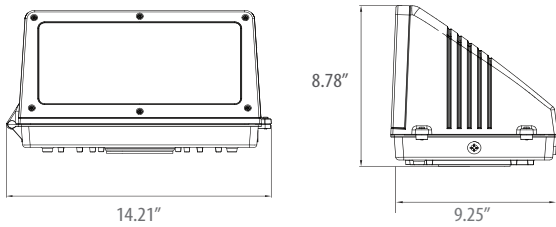

90W~145W OUTPUT

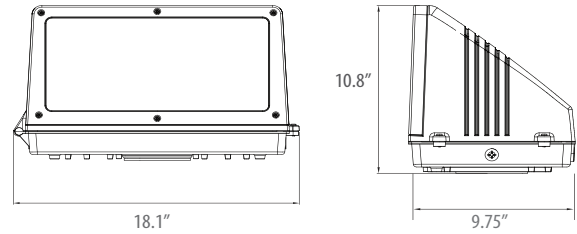

### Wiring Instruction (With Photocell)

