

LED FIXTURE

SSL Series



LED High bay-Xclusive High Ceiling SSL-XHC

Compact design combined with a low profile makes this the performer you need for your next high ceiling application.



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C



Features & Benefits

- cUL listed, DLC (Premium), NEMA 4X certified
- System light efficacy 130 LPW
- White finish with 10' power cord, strong cast aluminium body
- Superior thermal conductivity, tilted heat sink back design for easy wash-off
- 90° beam spread, PC Lens
- 1-10V dimming
- CRI≥80, L70 @ 50,000 hrs
- IP65, wet location rated

Dimensional Drawing

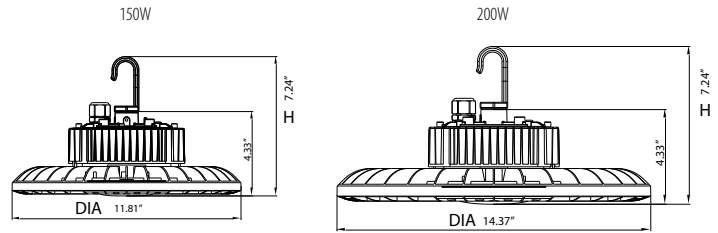

Ordering Information Example: SSL-XHC/100W/40/UNV/HK/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable	Options
SSL (Solid state lighting)	XHC (Xclusive high ceiling)	150W 200W	40 (4000K) 50 (5000K)	UNV (120-277V) 347V	HK (Hook mounting)	D (1-10V dimming)	SSL-XHC/16/AL/HOOD/90D SSL-XHC/16/PC/HOOD/90D SSL-XHC/COLLAR

Product Specification

Ordering Code	DLC (Premium)	Model Number	Wattage (W)	Input Voltage(V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Optics/ Distribution	Dimension DIA×H(inch)	Case QTY.
3667132	Y	SSL-XHC/150W/40/UNV/HK/D	150	120-277	50,000	20300	4000	≥80	Type V	11.81×7.24	1
3667133	Y	SSL-XHC/150W/50/UNV/HK/D	150	120-277	50,000	20300	5000	≥80	Type V	11.81×7.24	1
3667234	Y	SSL-XHC/150W/40/347V/HK/D	150	347	50,000	20300	4000	≥80	Type V	11.81×7.24	1
3667235	Y	SSL-XHC/150W/50/347V/HK/D	150	347	50,000	20300	5000	≥80	Type V	11.81×7.24	1
3667134	Y	SSL-XHC/200W/40/UNV/HK/D	200	120-277	50,000	27000	4000	≥80	Type V	14.37×7.24	1
3667135	Y	SSL-XHC/200W/50/UNV/HK/D	200	120-277	50,000	27000	5000	≥80	Type V	14.37×7.24	1
3667236	Y	SSL-XHC/200W/40/347V/HK/D	200	347	50,000	27000	4000	≥80	Type V	14.37×7.24	1
3667237	Y	SSL-XHC/200W/50/347V/HK/D	200	347	50,000	27000	5000	≥80	Type V	14.37×7.24	1

3660139	-	SSL-XHC/16/AL/HOOD/90D	90 Degree 16" Aluminium Hood								
3660140	-	SSL-XHC/16/PC/HOOD/90D	90 Degree 16" Polycarbonate Hood								
3660141	-	SSL-XHC/COLLAR	Adapter Ring, Required for 100W & 150W HighBay Hood Install								



90 Degree 16" Aluminium Hood
SSL-XHC/16/AL/HOOD/90D



90 Degree 16" Polycarbonate Hood
SSL-XHC/16/PC/HOOD/90D

Consult factory for additional options, sensor, EM pack, blue tooth.