




LED LAMP

VIVID Series



VIV-T8DF4, VIV-T8DF2



Features & Benefits

DLC approved	220° beam angle
All glass construction , aluminium end caps (Linear Tube)	50,000 hour life (L70)
Plastic body and end caps (U-Bend Tube)	Instant on with no warm-up time
High CRI (83+)	Compatible with most Instant Start Ballast ¹ with input voltage of 120-277V and 347V
Direct replacement for T8 fluorescent	

¹ For detail, you may contact your sales person or check www.turolight.com for ballast compatibility list

Warranty & Cautions


5-year limited warranty for DLC listed lamps / 3-year limited warranty for non-DLC*

Bulb wall temperature range between -20°C and +45°C

Not recommended to use with ballast 5 years or older

*Please check the "Turolight LED Limited Warranty" for details

Dimensional drawing

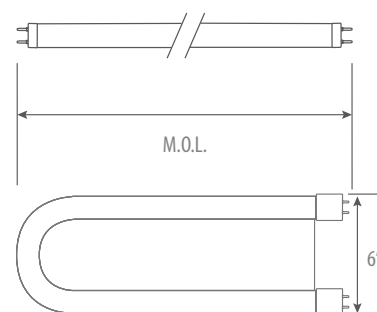

Product Specification

Ordering Code	DLC	Model Number	Nominal Lamp Power (Watts)	System Power (Watts)			Initial Lumen (lm)			Base	Voltage (V)	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
				Low BF (0.78)	Normal BF (0.88)	High BF (1.16)	Low BF (0.78)	Normal BF (0.88)	High BF (1.16)								
Linear Tubes																	
1762024	Y	VIV-T8DF4/11W/30/F/3FT	11	11	14	20	1200	1600	2300	G13	120-277, 347	50,000	220	3000	83	36	25
1762368	Y	VIV-T8DF4/11W/35/F/3FT	11	11	14	20	1200	1600	2300	G13	120-277, 347	50,000	220	3500	83	36	25
1762889	Y	VIV-T8DF4/11W/40/F/3FT	11	11	14	20	1250	1650	2350	G13	120-277, 347	50,000	220	4000	83	36	25
1762554	Y	VIV-T8DF4/11W/50/F/3FT	11	11	14	20	1250	1650	2350	G13	120-277, 347	50,000	220	5000	83	36	25
1762883	Y	VIV-T8DF4/10.5W/40/F	10.5	10.5	13.5	19.5	1350	1750	2450	G13	120-277, 347	50,000	220	4000	83	48	25
1762551	Y	VIV-T8DF4/10.5W/50/F	10.5	10.5	13.5	19.5	1400	1800	2500	G13	120-277, 347	50,000	220	5000	83	48	25
1762025	Y	VIV-T8DF2/13W/30/F	13	13	16	22	1400	1800	2500	G13	120-277, 347	50,000	220	3000	83	48	25
1762369	Y	VIV-T8DF2/13W/35/F	13	13	16	22	1400	1800	2500	G13	120-277, 347	50,000	220	3500	83	48	25
1762876	Y	VIV-T8DF2/13W/40/F	13	13	16	22	1400	1800	2500	G13	120-277, 347	50,000	220	4000	83	48	25
1762545	Y	VIV-T8DF2/13W/50/F	13	13	16	22	1500	1900	2600	G13	120-277, 347	50,000	220	5000	83	48	25
U-Bend Tubes																	
1762783	Y	VIV-T8DF4/U/13W/30/F	13	13	16	22	1400	1800	2500	G13	120-277, 347	50,000	220	3000	83	24	24
1762363	Y	VIV-T8DF4/U/13W/35/F	13	13	16	22	1400	1800	2500	G13	120-277, 347	50,000	220	3500	83	24	24
1762865	Y	VIV-T8DF4/U/13W/40/F	13	13	16	22	1450	1850	2550	G13	120-277, 347	50,000	220	4000	83	24	24
1762540	Y	VIV-T8DF4/U/13W/50/F	13	13	16	22	1500	1900	2600	G13	120-277, 347	50,000	220	5000	83	24	24

Ordering Information

Example: VIV-T8DF4/10.5W/40/F

LED CLASS	LAMP TYPE	DIRECT FIT	SHAPE	WATTAGE	CCT(K)	FROST	LENGTH
VIV (Vivid)	T8	DF2 (Direct Fit, 2 nd version) DF4 (Direct Fit, 4 th version)	U (U-Bend) Blank (Linear)	13W 11W 10.5W	50 (5000K) 40 (4000K) 35 (3500K) 30 (3000K)	F (Frost)	3FT (3 foot) Blank (4 foot / 2 foot for U tube)