



LED FIXTURE

SSL Series

LED Linear High Bay SSL-LHB2

Offering quality lighting and excellent energy savings compared to linear fluorescent and HID high bay fixtures.



Features & Benefits

CUL listed, DLC Premium

Available with lumen outputs from 11,700 to 34,715 lumens

System light efficacy ≥ 130 lm/W

Voltage 120-277V/ 347V

1-10V dimmable

Damp location rated, L70@ 100,000Hrs

CRI >80

Formed steel housing with white powder coat finish/ Frosted lens

120° Beam spread

10' White Cord, 10' Aircraft Cable (set)

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and $+50^{\circ}\text{C}$

* DLC under qualifying process Q2, 2018

Applications

Warehouse, Factory, Convention Center, Gymnasium etc.

Dimensional drawing

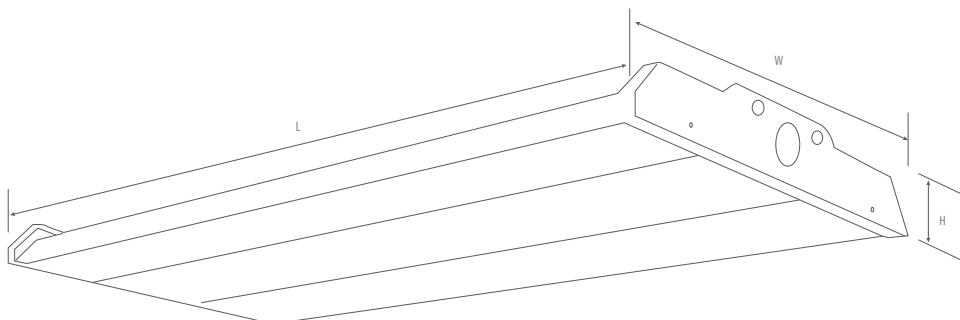

	L	W	H
90W,135W,175W	24.8"	15"	2"
265W	24.8"	18.90"	2"



LED Linear High Bay

SSL-LHB2

Ordering Information

Example: SSL-LHB2/90W/40/UNV/AC/D

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Mounting	Dimmable
SSL (Solid State Lighting)	LHB2 (Linear High Bay)	90W 135W 175W 265W	40 (4000K) 50 (5000K)	UNV (120-277V) 347(347V)	AC (Aircraft Cable 10' set)	D (Dimmable)

Product Specification

Ordering Code	DLC/ DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension L×W×H(inch)	Case QTY.
3666128	YES	SSL-LHB2/90W/40/UNV/AC/D	90	120-277V	100,000	11,700	4000	>80	24.8" × 15" × 2"	1
3666129	YES (Premium)	SSL-LHB2/90W/50/UNV/AC/D	90	120-277V	100,000	11,790	5000	>80	24.8" × 15" × 2"	1
3666233	YES	SSL-LHB2/90W/40/347/AC/D	90	347V	100,000	11,700	4000	>80	24.8" × 15" × 2"	1
3666234	YES (Premium)	SSL-LHB2/90W/50/347/AC/D	90	347V	100,000	11,790	5000	>80	24.8" × 15" × 2"	1
3667117	YES	SSL-LHB2/135W/40/UNV/AC/D	135	120-277V	100,000	17,550	4000	>80	24.8" × 15" × 2"	1
3667118	YES (Premium)	SSL-LHB2/135W/50/UNV/AC/D	135	120-277V	100,000	17,685	5000	>80	24.8" × 15" × 2"	1
3667219	YES	SSL-LHB2/135W/40/347/AC/D	135	347V	100,000	17,550	4000	>80	24.8" × 15" × 2"	1
3667220	YES (Premium)	SSL-LHB2/135W/50/347/AC/D	135	347V	100,000	17,685	5000	>80	24.8" × 15" × 2"	1
3667119	YES	SSL-LHB2/175W/40/UNV/AC/D	175	120-277V	100,000	22,750	4000	>80	24.8" × 15" × 2"	1
3667120	YES (Premium)	SSL-LHB2/175W/50/UNV/AC/D	175	120-277V	100,000	22,925	5000	>80	24.8" × 15" × 2"	1
3667221	YES	SSL-LHB2/175W/40/347/AC/D	175	347V	100,000	22,750	4000	>80	24.8" × 15" × 2"	1
3667222	YES (Premium)	SSL-LHB2/175W/50/347/AC/D	175	347V	100,000	22,925	5000	>80	24.8" × 15" × 2"	1
3668104	YES	SSL-LHB2/265W/40/UNV/AC/D	265	120-277V	100,000	34,450	4000	>80	24.8" × 18.9" × 2"	1
3668105	YES (Premium)	SSL-LHB2/265W/50/UNV/AC/D	265	120-277V	100,000	34,715	5000	>80	24.8" × 18.9" × 2"	1
3668204	YES	SSL-LHB2/265W/40/347/AC/D	265	347V	100,000	34,450	4000	>80	24.8" × 18.9" × 2"	1
3668205	YES (Premium)	SSL-LHB2/265W/50/347/AC/D	265	347V	100,000	34,715	5000	>80	24.8" × 18.9" × 2"	1
3660090		SSL-LHB2/MWG	Medium wire guard (for 90W, 135W, 175W LHB2)							
3660091		SSL-LHB2/LWG	Large wire guard (for 265W LHB2)							