


# LED FIXTURE

## SSL Series

# LED Area Light SSL-AL

Outstanding photometric performance, excellent uniform illumination, low profile construction, high efficacy and long lifespan, it's ideal for commercial lighting application.

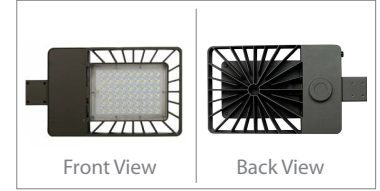

### Features & Benefits

- cELT listed, LM79 and LM80 certified
- Die-cast aluminum with durable dark bronze finish
- UL Class II LED driver, 0-10V dimming  
PF>0.98, efficacy 125~130 LPW
- IES Type V and Type III for optimized light distribution  
(Type III lens and Type V lens)
- Optional installation of Slipfitter, Yoke and Pole Mount, mounting ordered separately


- Motion sensor, microwave 120-277V and photocell, factory ordered
- 5000K and 4000K available
- CRI>70, L70 @ 50,000 Hrs
- Voltage 120-277V/200-480V
- IP65 rated, wet location

### Warranty

- 5-year limited warranty in commercial use from the date of purchase
- Operating temperature range between -40°C and +50°C

### Applications



Parks, Shopping Malls, Outlets, Plazas, City Halls, Historical Sites, Road Lighting

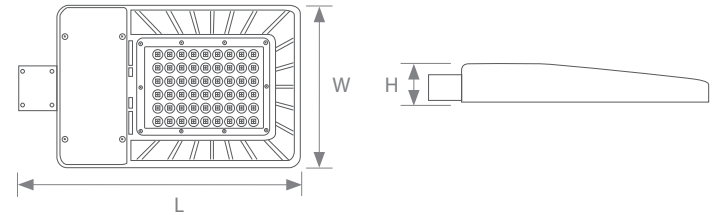

### Ordering Information Example: SSL-AL/T3/150W/50/HVU/DB/D

Family Name	Fixture Type	Light Distribution Type	Wattage	CCT	Voltage (V)	Body Finish	Dimmable	Options
SSL (Solid State Lighting)	AL (Area Lighter)	T3 (Type III)*	70W 100W 150W 200W 240W 300W	40 (4000K) 50 (5000K)	UNV (120-277V) HVU (200-480V)	DB (Dark Bronze)	D (Dimmable)	SSL-AL/ARM-SSF/DB SSL-AL/YOKE-MTG/DB SSL-AL/SQ-RD-MTG/DB SSL-AL/T5/LENS SSL-AL/PLATE/M SSL-AL/PLATE/L SSL-AL/WP/WC SSL-AL/HS/M SSL-AL/HS/L SSL-FL/SB/ARM-SSF/DB

\* Type III is default, you can order the optional lens separately for Type V (T5).

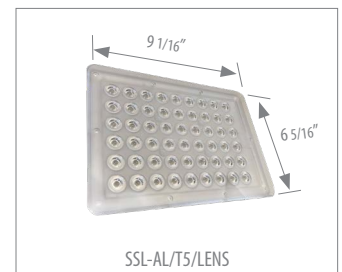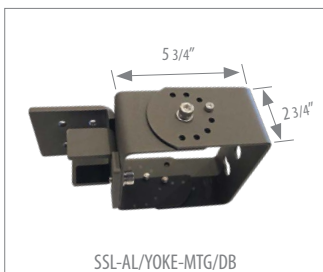

# LED Area Light

## SSL-AL

### Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/Distribution	Initial Delivered Lumens (lm)	CCT (K)	CRI	Dimension LxWxH(inch)	Case QTY.	
3666133	SSL-AL/T3/70W/40/UNV/DB/D	70	120-277	50,000	Type III	10,203	4000	70	18.5 X 10.5 X 3.54	1	
3666134	SSL-AL/T3/70W/50/UNV/DB/D	70	120-277	50,000	Type III	10,486	5000	70	18.5 X 10.5 X 3.54	1	
3666235	SSL-AL/T3/100W/40/HVU/DB/D	100	200-480	50,000	Type III	13,075	4000	70	18.5 X 10.5 X 3.54	1	
3666135	SSL-AL/T3/100W/40/UNV/DB/D	100	120-277	50,000	Type III	14,092	4000	70	18.5 X 10.5 X 3.54	1	
3666236	SSL-AL/T3/100W/50/HVU/DB/D	100	200-480	50,000	Type III	13,401	5000	70	18.5 X 10.5 X 3.54	1	
3666136	SSL-AL/T3/100W/50/UNV/DB/D	100	120-277	50,000	Type III	14,324	5000	70	18.5 X 10.5 X 3.54	1	
3667223	SSL-AL/T3/150W/40/HVU/DB/D	150	200-480	50,000	Type III	19,283	4000	70	18.5 X 10.5 X 3.54	1	
3667121	SSL-AL/T3/150W/40/UNV/DB/D	150	120-277	50,000	Type III	20,618	4000	70	18.5 X 10.5 X 3.54	1	
3667224	SSL-AL/T3/150W/50/HVU/DB/D	150	200-480	50,000	Type III	19,568	5000	70	18.5 X 10.5 X 3.54	1	
3667122	SSL-AL/T3/150W/50/UNV/DB/D	150	120-277	50,000	Type III	21,045	5000	70	18.5 X 10.5 X 3.54	1	
3667225	SSL-AL/T3/200W/40/HVU/DB/D	200	200-480	50,000	Type III	26,059	4000	70	21.5 X 16.9 X 3.54	1	
3667123	SSL-AL/T3/200W/40/UNV/DB/D	200	120-277	50,000	Type III	28,596	4000	70	21.5 X 16.9 X 3.54	1	
3667226	SSL-AL/T3/200W/50/HVU/DB/D	200	200-480	50,000	Type III	27,232	5000	70	21.5 X 16.9 X 3.54	1	
3667124	SSL-AL/T3/200W/50/UNV/DB/D	200	120-277	50,000	Type III	29,282	5000	70	21.5 X 16.9 X 3.54	1	
3667227	SSL-AL/T3/240W/40/HVU/DB/D	240	200-480	50,000	Type III	31,408	4000	70	21.5 X 16.9 X 3.54	1	
3667125	SSL-AL/T3/240W/40/UNV/DB/D	240	120-277	50,000	Type III	35,001	4000	70	21.5 X 16.9 X 3.54	1	
3667228	SSL-AL/T3/240W/50/HVU/DB/D	240	200-480	50,000	Type III	32,570	5000	70	21.5 X 16.9 X 3.54	1	
3667126	SSL-AL/T3/240W/50/UNV/DB/D	240	120-277	50,000	Type III	35,777	5000	70	21.5 X 16.9 X 3.54	1	
3668206	SSL-AL/T3/300W/40/HVU/DB/D	300	200-480	50,000	Type III	38,646	4000	70	21.5 X 16.9 X 3.54	1	
3668106	SSL-AL/T3/300W/40/UNV/DB/D	300	120-277	50,000	Type III	43,767	4000	70	21.5 X 16.9 X 3.54	1	
3668207	SSL-AL/T3/300W/50/HVU/DB/D	300	200-480	50,000	Type III	38,824	5000	70	21.5 X 16.9 X 3.54	1	
3668107	SSL-AL/T3/300W/50/UNV/DB/D	300	120-277	50,000	Type III	44,807	5000	70	21.5 X 16.9 X 3.54	1	
3660078	SSL-AL/ARM-SSF/DB	Male Adjustable Slip Fitter for Area Light, 3x18AWG SJTW Cable Installed, Dark Bronze									
3660079	SSL-AL/YOKE-MTG/DB	Male Adjustable Trunnion Mounting for Area Light, Dark Bronze (** for use with SSL-AL/WP/WC)									
3660080	SSL-AL/SQ-RD-MTG/DB	Universal Male Straight Arm for Square/Round Pole, Dark Bronze									
3660081	SSL-AL/T5/LENS	SSL-AL Type V Lens									
3660082	SSL-AL/PLATE/M	SSL-AL Drilled Driver Compartment Cover for Motion Sensor 70/100/150W, Dark Bronze									
3660083	SSL-AL/PLATE/L	SSL-AL Drilled Driver Compartment Cover for Motion Sensor 200/240/300W, Dark Bronze									
3660084	SSL-AL/WP/WC	SSL-AL Wire to Wire Connector IP68, 450VAC, GA, AWG 20-14 Black (** Suggested use with SSL-AL/YOKE-MTG/DB)									
3660085	SSL-AL/HS/M	House Shield for SSL-AL 70/100/160W, Dark Bronze									
3660086	SSL-AL/HS/L	House Shield for SSL-AL 200/240/300W, Dark Bronze									
3660093	SSL-AL/WALL-MTG/DB	90° Wall Mount with 2-3/8" O.D. Tenon									

### EPA Calculation

Wattage	0.43	0.59	0.86	0.86	0.86
SSL-AL/T3/70W	0.43	0.59	0.86	0.86	0.86
SSL-AL/T3/100W	0.43	0.59	0.86	0.86	0.86
SSL-AL/T3/150W	0.43	0.59	0.86	0.86	0.86
SSL-AL/T3/200W	0.46	0.68	0.92	0.92	0.92
SSL-AL/T3/240W	0.46	0.68	0.92	0.92	0.92
SSL-AL/T3/300W	0.46	0.68	0.92	0.92	0.92

### Mounting Options

