



LED FIXTURE

SSL Series



90W ~ 135W



27W ~ 70W

Full Cutoff LED Wall Pack

SSL-WP3S

Enhanced LED performance in a classic design, offer maximum light output for general purpose area and security lighting.



Features & Benefits

cUL listed, DLC Premium	Junction box or wall mounted directly
Available with lumen outputs from 3,800 to 18,000 lumens	CRI=70, L70 @ 50,000 Hrs
Die-cast aluminum with durable dark bronze coat finish	Voltage 120-277V/347V
Wet location rated	Photocell Sensor optional


Warranty

5-year limited warranty in commercial use from the date of purchase
 Operating temperature range between -40°C and +45°C

Applications

Security, pathway and perimeter lighting, Building entryways and walkways

Product Specification

Ordering Code	DLC*	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Optics/ Distribution	Lumens (lm)	CCT (K)	CRI	Dimension LxWxH(inch)	Case QTY.
3664132	Y	SSL-WP3S/27W/40/UNV/DB	27W LED Full Cut Off Wall Pack, 40K, 120-277V, Dark Bronze	27	120-277	50,000	TYPE III	3900	4000	70	14.21 x 7.99 x 9.24	1
3664133	Y	SSL-WP3S/27W/50/UNV/DB	27W LED Full Cut Off Wall Pack, 50K, 120-277V, Dark Bronze	27	120-277	50,000	TYPE III	3950	5000	70	14.21 x 7.99 x 9.24	1
3665153	Y	SSL-WP3S/45W/40/UNV/DB	45W LED Full Cut Off Wall Pack, 40K, 120-277V, Dark Bronze	45	120-277	50,000	TYPE III	6400	4000	70	14.21 x 7.99 x 9.24	1
3665154	Y	SSL-WP3S/45W/50/UNV/DB	45W LED Full Cut Off Wall Pack, 50K, 120-277V, Dark Bronze	45	120-277	50,000	TYPE III	6450	5000	70	14.21 x 7.99 x 9.24	1
3665248	Y/P	SSL-WP3S/45W/40/347V/DB	45W LED Full Cut Off Wall Pack, 40K, 347V, Dark Bronze	45	347	50,000	TYPE III	6500	4000	70	14.21 x 7.99 x 9.24	1
3665249	Y/P	SSL-WP3S/45W/50/347V/DB	45W LED Full Cut Off Wall Pack, 50K, 347V, Dark Bronze	45	347	50,000	TYPE III	6600	5000	70	14.21 x 7.99 x 9.24	1
3666141	Y	SSL-WP3S/70W/40/UNV/DB	70W LED Full Cut Off Wall Pack, 40K, 120-277V, Dark Bronze	70	120-277	50,000	TYPE III	9800	4000	70	14.21 x 7.99 x 9.24	1
3666142	Y	SSL-WP3S/70W/50/UNV/DB	70W LED Full Cut Off Wall Pack, 50K, 120-277V, Dark Bronze	70	120-277	50,000	TYPE III	9900	5000	70	14.21 x 7.99 x 9.24	1
3666242	Y/P	SSL-WP3S/70W/40/347V/DB	70W LED Full Cut Off Wall Pack, 40K, 347V, Dark Bronze	70	347	50,000	TYPE III	9400	4000	70	14.21 x 7.99 x 9.24	1
3666243	Y/P	SSL-WP3S/70W/50/347V/DB	70W LED Full Cut Off Wall Pack, 50K, 347V, Dark Bronze	70	347	50,000	TYPE III	9500	5000	70	14.21 x 7.99 x 9.24	1
3666143	Y	SSL-WP3S/90W/40/UNV/DB	90W LED Full Cut Off Wall Pack, 40K, 120-277V, Dark Bronze	90	120-277	50,000	TYPE III	12000	4000	70	18.1 x 9.02 x 9.75	1
3666144	Y	SSL-WP3S/90W/50/UNV/DB	90W LED Full Cut Off Wall Pack, 50K, 120-277V, Dark Bronze	90	120-277	50,000	TYPE III	12200	5000	70	18.1 x 9.02 x 9.75	1
3666244	Y/P	SSL-WP3S/90W/40/347V/DB	90W LED Full Cut Off Wall Pack, 40K, 347V, Dark Bronze	90	347	50,000	TYPE III	12000	4000	70	18.1 x 9.02 x 9.75	1
3666245	Y/P	SSL-WP3S/90W/50/347V/DB	90W LED Full Cut Off Wall Pack, 50K, 347V, Dark Bronze	90	347	50,000	TYPE III	12200	5000	70	18.1 x 9.02 x 9.75	1
3667127	Y/P	SSL-WP3S/135W/40/UNV/DB	135W LED Full Cut Off Wall Pack, 40K, 120-277V, Dark Bronze	135	120-277	50,000	TYPE III	18000	4000	70	18.1 x 9.02 x 9.75	1
3667128	Y/P	SSL-WP3S/135W/50/UNV/DB	135W LED Full Cut Off Wall Pack, 50K, 120-277V, Dark Bronze	135	120-277	50,000	TYPE III	18000	5000	70	18.1 x 9.02 x 9.75	1
3667229	Y/P	SSL-WP3S/135W/40/347V/DB	135W LED Full Cut Off Wall Pack, 40K, 347V, Dark Bronze	135	347	50,000	TYPE III	18000	4000	70	18.1 x 9.02 x 9.75	1
3667230	Y/P	SSL-WP3S/135W/50/347V/DB	135W LED Full Cut Off Wall Pack, 50K, 347V, Dark Bronze	135	347	50,000	TYPE III	18000	5000	70	18.1 x 9.02 x 9.75	1
		JL-403C	Photocell Sensor, for Wall Pack UNV	 Photocell								

* DLC Premium (Y/P), DLC (Y)

Full Cutoff LED Wall Pack


SSL-WP3S

Ordering Information Example: SSL-WP3S/27W/40/UNV/DB


Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Body Finish	Mounting	Options
SSL (Solid State Lighting)	WP3S (Full Cutoff Wall Pack)	27W 45W 70W 90W 135W	40 (4000K) 50 (5000K)	UNV(120-277V) 347V	DB (Dark Bronze)	Wall	Photocell Sensor

Dimensional Drawing

27W~70W OUTPUT

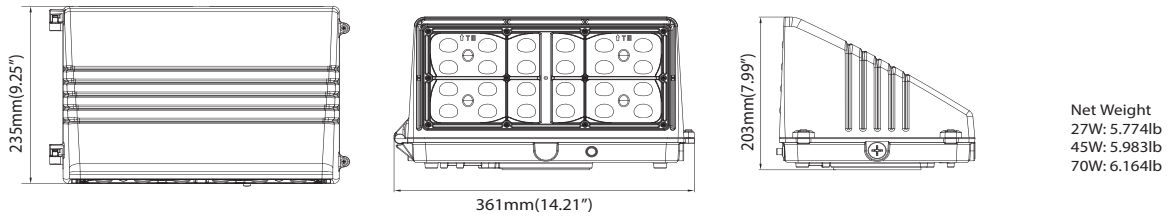

90W~135W OUTPUT

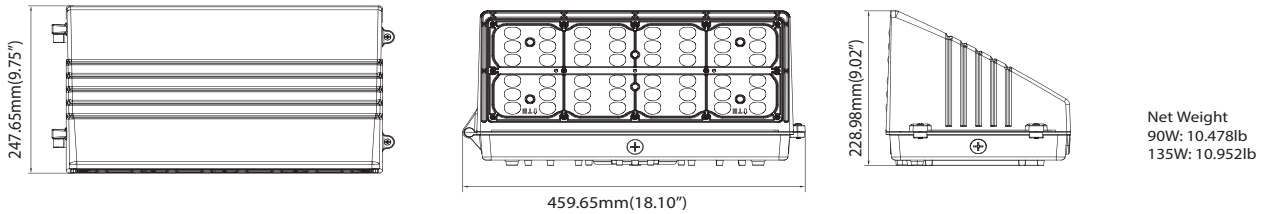

Wiring Instruction (With Photocell)

