

# LED FIXTURE

## RIGID Series



# LED Slim Panel

## RGD-SP

Slim design switchable CCT, now 120V & 347V



### Features & Benefits

- \_\_\_\_\_ Type IC Rated – approved for direct contact with insulation
- \_\_\_\_\_ Isolated internal driver in junction box – fast and easy to install
- \_\_\_\_\_ Switchable CCT (30K/40K/50K)
- \_\_\_\_\_ Range of sizes (4", 6", 8" available)
- \_\_\_\_\_ Finish Color White (Interchangeable trim ring for black or brushed nickel finish)
- \_\_\_\_\_ Wet location rated
- \_\_\_\_\_ J-Box c/w 3x3 wire quick connectors, allowing for easy through wiring

- \_\_\_\_\_ Energy Star approved
- \_\_\_\_\_ L70 @ 50,000 Hrs
- \_\_\_\_\_ 120V - TRIAC dimmable down to 10%, FT4 cable
- \_\_\_\_\_ 347V - Non dimmable, FT6 cable
- \_\_\_\_\_ High CRI (80+)
- \_\_\_\_\_ 120V / 347V LED Driver, PF>0.9
- \_\_\_\_\_ PC lens aluminium body
- \_\_\_\_\_ Beam angle 110°


### Warranty

- \_\_\_\_\_ 5-year limited warranty in commercial use from the date of purchase
- \_\_\_\_\_ Operating temperature range between -20°C and +40°C

### Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

### Dimensional drawing

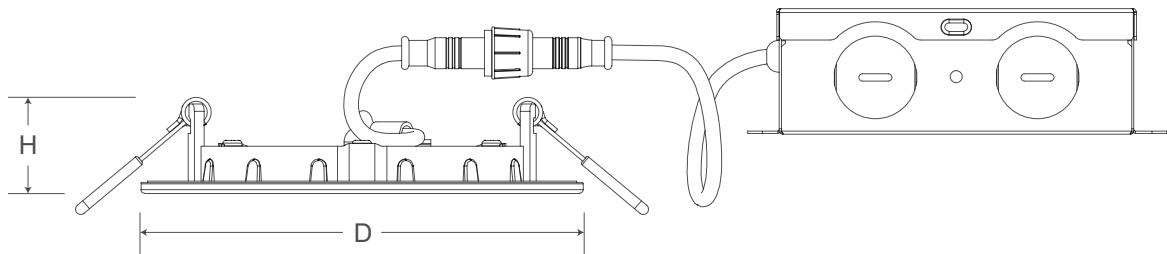

	M.O.D	Cut-Out	H
SP/4	4.92"	4"	0.96"
SP/6	6.77"	6.1"	0.96"
SP/8	9.13"	8.2"	0.96"


# LED Slim Panel

## RGD-SP

### Ordering Information Example: RGD-SP/4/8W/MULTI-K/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Finish Color	D	Options
RGD (Rigid)	SP (Slim Panel)	4 (4") 6 (6") 8 (8")	8W 10.5W 24.5W	MULTI-K (Multiple CCT, 30K/40K/50K Switchable)	Blank (120V) 347V	WH (White)	D (Dimmable)	Black Trim Ring Brush Nickel Trim Ring (Sell seperately)

### Product Specification

Ordering Code	ES	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K) Adjustable	CRI	Beam Angle	Wet Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662134	Yes	RGD-SP/4/8W/MULTI-K/WH/D	8	120	50,000	650	30/40/50	>80	110°	Yes	Y	4.92" × 0.96"	6
3662221	Yes	RGD-SP/4/8W/MULTI-K/347V/WH	8	347	50,000	650	30/40/50	>80	110°	Yes	N	4.92" × 0.96"	6
3662135	Yes	RGD-SP/6/10.5W/MULTI-K/WH/D	10.5	120	50,000	1000	30/40/50	>80	110°	Yes	Y	6.77" × 0.96"	6
3662222	Yes	RGD-SP/6/10.5W/MULTI-K/347V/WH	10.5	347	50,000	1000	30/40/50	>80	110°	Yes	N	6.77" × 0.96"	6
3664130	Yes	RGD-SP/8/24.5W/MULTI-K/WH/D	24.5	120	50,000	2100	30/40/50	>80	110°	Yes	Y	9.13" × 0.96"	6
3664212	Yes	RGD-SP/8/24.5W/MULTI-K/347V/WH	24.5	347	50,000	2100	30/40/50	>80	110°	Yes	N	9.13" × 0.96"	6
3660094		RGD-SP/4/CCT/BK	RIGID 4" Slim Panel, Black Trim Ring for 3-CCT Selectable									4.92"	
3660095		RGD-SP/4/CCT/BN	RIGID 4" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									4.92"	
3662120		RGD-SP/6/BK	RIGID 6" Slim Panel, Black Trim Ring for 3-CCT Selectable									6.77"	
3662121		RGD-SP/6/BN	RIGID 6" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									6.77"	
3664113		RGD-SP/8/BK	RIGID 8" Slim Panel, Black Trim Ring for 3-CCT Selectable									9.13"	
3664115		RGD-SP/8/BN	RIGID 8" Slim Panel, Brush Nickel Trim Ring for 3-CCT Selectable									9.13"	