

# LED FIXTURE

## RIGID Series

# LED Slim Panel PRO-SP2

Slim design allows it to be installed in low plenum ceilings.



### Features & Benefits

- Type IC Rated – approved for direct contact with insulation, FT4 rated cable
- Isolated internal driver in junction box – fast and easy to install
- Finish colour white, damp location rated
- PC lens aluminium body, 120° beam angle

- Energy Star approved
- L70 @ 60000 Hrs, High CRI (80+)
- Dimmable Triac down to 10%
- PL-AMP4 mounting plate ordered separately



### Warranty

- 3-year limited warranty
- Operating temperature range between -20°C and +40°C

### Applications

Residential / Commercial, Schools, Retirement Homes, University, Supermarkets, Shops, Hotels, Conference Rooms, Office Lighting, Show Room, Corridor, Kitchens etc.

### Dimensional drawing

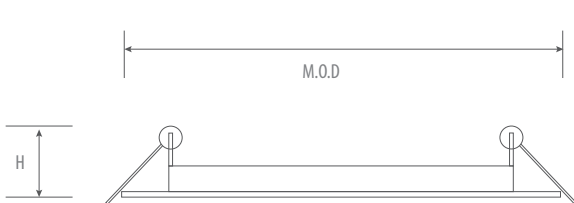

M.O.D	Cut-Out	H
5 3/8"	4 1/4"	7/8"

### Ordering Information Example: PRO-SP/4/9.5W/30/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Finish Color	Dimmable
PRO	SP2 (Slim Panel)	4 (4")	9W	30 (3000K) 40 (4000K)	120 (120V)	WH (White) BK (Black) BN (Brushed Nickel)	TRIAC

### Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating(Hrs)	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Case QTY.
3662138	Yes	PRO-SP2/4/9W/30/120/WH/D	9W	120V	60,000	650	3000	≥80	50
3662139	Yes	PRO-SP2/4/9W/40/120/WH/D	9W	120V	60,000	650	4000	≥80	50
3662155	Yes	PRO-SP2/4/9W/30/120/BK/D	9W	120V	60,000	650	3000	≥80	50
3662156	Yes	PRO-SP2/4/9W/30/120/BN/D	9W	120V	60,000	650	3000	≥80	50