

LED FIXTURE

TL Series



LED Emergency

TL-EM001

Twin Head LED Emergency Light



Features & Benefits

Injection-molded thermoplastic housing

Input Voltage 120/347V, 181 lumens

Easy installation

Ni-cd battery backup for 90 minutes

2W x 2 SMD LED adjustable heads


Universal (Wall, Ceiling) mounting

IP Class: IP20, not intended for outdoor use

Test switch and charge indicator light

UL-94V-0 flame rating, fire-retardant

Dimensional Drawing

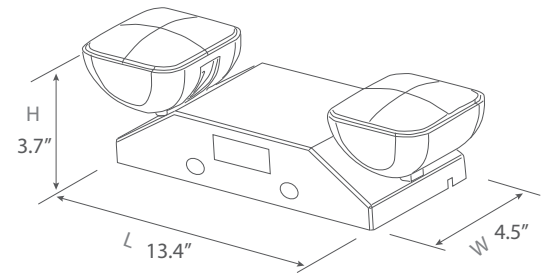

Warranty

2-year limited warranty in commercial use from the date of purchase

Operating temperature range between -10°C and +40°C

Ordering Information Example: TL-RMES003

| Family Name | Fixture Type | Model |
|----------------|----------------------|-------------------------------------|
| TL (Turolight) | EM (Emergency Light) | 001 (Twin Head LED Emergency Light) |

Product Specification

| Ordering Code | Model Number | Description | Wattage (W) | Input Voltage (V) | CCT (K) | Hour Rating | CRI | Lumens | Mounting | Self Powered Battery | Damp Location | Dimensions LxWxH (inch) | Case QTY. |
|---------------|--------------|---|-------------|-------------------|---------|-------------|-----|--------|---------------|----------------------|---------------|-------------------------|-----------|
| 3461211 | TL-EM001 | Twin Head LED Emergency With Battery Backup | 4W | 120/347VAC | 7,000 | 50,000 | 82 | 181 | Wall, Ceiling | Yes (90 minutes) | Yes | 13.4"×4.5"×3.7" | 12 |