



# LED FIXTURE

## SSL Series



# Full Cutoff LED Wall Pack SSL-WP3T

Enhanced LED performance in a classic design  
120-347V Auto-Sensing Driver  
Multiple Wattage and Multiple Kelvin Selection



Medium Size

Large Size



### Features & Benefits

cULus listed, DLC Premium

120-347V Auto Sensing driver, 0-10V dimming

Switchable CCT (30K/40K/50K), Switchable Wattage

Die-cast aluminum with durable dark bronze coat finish

Ip 65, Wet location rated

2 Fixture selection offers 18 possible solutions per fixture

CRI≥80, L70 @ 50,000 Hrs


Photocell Sensor installed

### Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +50°C

### Dimensional drawing

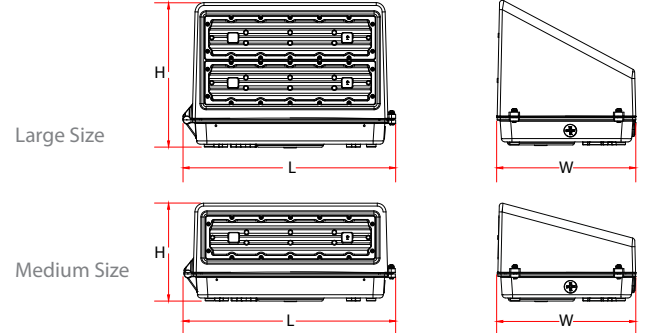

### Applications

Security, pathway and perimeter lighting, Building entryways and walkways

### Ordering Information Example: SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable	Body	Finish
SSL (Solid State Lighting)	WP3T (Full Cutoff LED Wall Pack)	60M (Max 60w Medium Size) 150L (Max 150w Large Size)	MW (Multi Wattage)	MK (Multi CCT)	120-347V	D (Dimmable)	PC (Polycarbonate)	DB (Dark Bronze)

### Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3680302	Y	SSL-WP3T/60M/MW/MK/120-347V/D/PC/DB	60-40-25	120-347V	50,000	7800-5200-3250	30-40-50	≥80	Yes	14.17" × 9.29" × 6.54"	1
3680303	Y	SSL-WP3T/150L/MW/MK/120-347V/D/PC/DB	150-120-90	120-347V	50,000	18400-15600-11700	30-40-50	≥80	Yes	14.17" × 9.29" × 9.65"	1