

LED FIXTURE

DL Series



LED Wrap Around

DL-WA1, DL-WA2, DL-WA3, DL-WA5

DL-WA1 (LED 4' Wrap Light)
 DL-WA2 (LED 2' / 4' Hinged Wrap Light)
 DL-WA3 (LED 4' Eco-Wrap Light), Newly added 120-347V Auto-sensing Driver
 DL-WA5 (LED 4' White Wrap Light), 120-347V Auto-sensing Driver

Features & Benefits

- _____ CUL listed, DLC (Premium)*
- _____ 0-10V dimmable*
- _____ High CRI (80+)
- _____ Wall or ceiling mounted

- _____ L70 @*
- _____ PMMA Lens
- _____ Damp location rated
- _____ Shallow profile, excellent for low ceilings

Warranty

5-year limited warranty in commercial use from the date of purchase


Operating temperature range between -20°C and +40°C

* For applicable models, see product specification below

Applications

Corridors, Carports, storage rooms, retail, commercial, etc.

Dimensional drawing

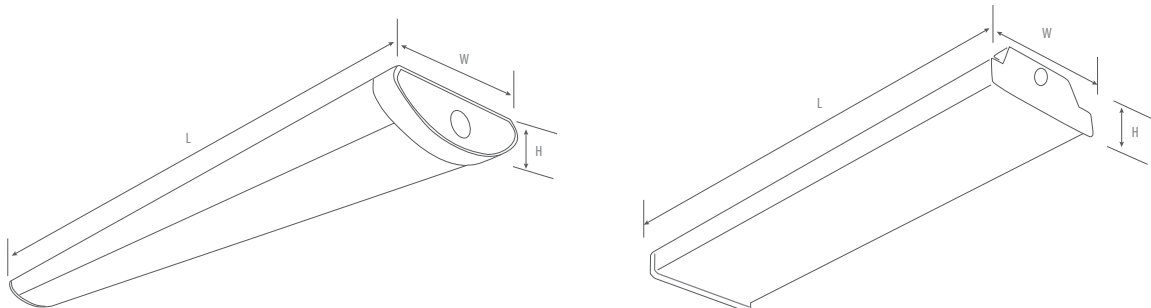

	L	W	H
DL-WA1/4F	48.5"	5.56"	2"
DL-WA2/2F	24.5"	7.09"	2.8"
DL-WA2/4F	48"	7.09"	2.8"
DL-WA3/4F	48.6"	6.5"	2.5"
DL-WA5/4F	47.2"	5.3"	2.14"



LED Wrap Around

DL-WA1, DL-WA2, DL-WA3, DL-WA5

Ordering Information Example: DL-WA2/2F/25W/40/UNV/D

Family Name	Fixture Type	Size	Wattage	CCT	Input Voltage	Dimmable	Options
DL (Deltalum)	WA1 (Wrap Around 1)	4F (4')	40W	30 (3000K) 40 (4000K) 50 (5000K)	Blank (120-277V)	Blank (non-dimmable)	S (Sensor) EM (Emergency Battery)
	WA2 (Wrap Around 2)	2F (2') 4F (4')	25W 40W	35 (3500K) 40 (4000K)	UNV (120-277V)	D (Dimmable)	
	WA3 (Wrap Around 3)	4F (4')	42W	35 (3500K) 40 (4000K) 50 (5000K)	UNV (120-277V) 120-347V	Blank (non-dimmable) D (Dimmable)	
	WA5 (Wrap Around 5)	4F (4')	48W	40 (4000K)	120-347V	D (Dimmable)	

Product Specification

Ordering Code	DLC/DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Beam Angle	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3665129	NO	DL-WA1/4F/40W/30	40	120-277V	50,000	120°	4200	3000	>80	Yes	48	4
3665124	NO	DL-WA1/4F/40W/40	40	120-277V	50,000	120°	4200	4000	>80	Yes	48	4
3665125	NO	DL-WA1/4F/40W/50	40	120-277V	50,000	120°	4200	5000	>80	Yes	48	4
3664124	DLC-P	DL-WA2/2F/25W/40/UNV/D	25	120-277V	100,000	120°	3275	4000	>80	Yes	24.5	4
3665161	DLC-P	DL-WA2/4F/40W/35/UNV/D	40	120-277V	100,000	120°	5200	3500	>80	Yes	48	4
3665135	DLC-P	DL-WA2/4F/40W/40/UNV/D	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
3665162	NO	DL-WA2/4F/40W/35/UNV/D/S	40	120-277V	100,000	120°	5200	3500	>80	Yes	48	4
-	NO	DL-WA2/4F/40W/40/UNV/D/EM	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
3665165	NO	DL-WA2/4F/40W/40/UNV/D/S	40	120-277V	100,000	120°	5240	4000	>80	Yes	48	4
3665136	NO	DL-WA3/4F/42W/35/UNV	42	120-277V	100,000	120°	4368	3500	>80	Yes	48	4
3665137	NO	DL-WA3/4F/42W/40/UNV	42	120-277V	100,000	120°	4700	4000	>80	Yes	48	4
3665138	YES	DL-WA3/4F/42W/50/UNV	42	120-277V	100,000	120°	4704	5000	>80	Yes	48	4
3665309	DLC-P	DL-WA3/4F/42W/35/120-347V	42	120-347V	100,000	120°	5460	3500	>80	Yes	48	4
3665310	DLC-P	DL-WA3/4F/42W/40/120-347V	42	120-347V	100,000	120°	5502	4000	>80	Yes	48	4
3665316	YES	DL-WA5/4F/48W/40/120-347V/D	48	120-347V	100,000	120°	5520	4000	>80	Yes	48	4
3660052		DL-WA2/2F/LENS	DeltaLum Hinged-Wrap Light 2ft. Replacement PMMA Lens									
3660053		DL-WA2/4F/LENS	DeltaLum Hinged-Wrap Light 4ft. Replacement PMMA Lens									
3660054		DL-WA3/4F/LENS	DeltaLum Eco-Wrap Light 4ft. Replacement PMMA Lens									