

LED FIXTURE

SSL Series



LED Glass Wall Pack SSL-WP1T

Enhanced LED performance in a classic design with glass lens
120-347V Auto-Sensing Driver
Multiple Wattage and Multiple Kelvin Selection



Features & Benefits

cULus listed, DLC Premium

120-347V Auto Sensing driver, 0-10V dimming

Switchable CCT (30K/40K/50K), Switchable Wattage

Die-cast aluminum with durable dark bronze coat finish

Wet location rated

Junction box or wall mounted directly

CRI≥80, L70 @ 50,000 Hrs


Photocell Sensor optional

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between -40°C and +40°C


Dimensional drawing

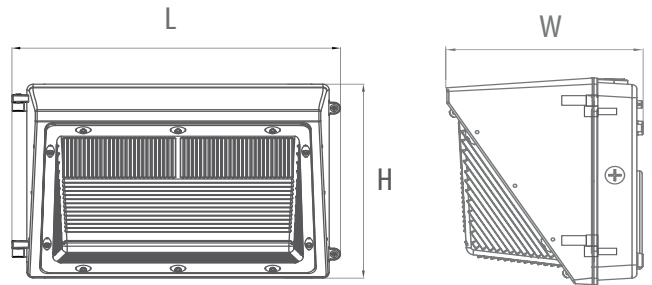

Applications

Security, pathway and perimeter lighting, Building entryways and walkways

Ordering Information Example: SSL-WP1T/60M/MW/MK/120-347V/D/DB

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable	Finish	Options
SSL (Solid State Lighting)	WP1T (LED Glass Wall Pack)	60M (Max 60w) 100L (Max 100w)	MW (Multi Wattage)	MK (Multi CCT)	120-347V	D (Dimmable)	DB (Dark Bronze)	Photocell Sensor 

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension LxWxH(inch)	Case QTY.
3680304	Y	SSL-WP1T/60M/MW/MK/120-347V/D/DB	60-40-28	120-347V	50,000	7200-4800-3360	30-40-50	≥80	Yes	14.3" x 9" x 7.8"	2
3680305	Y	SSL-WP1T/100L/MW/MK/120-347V/D/DB	100-90-80-70	120-347V	50,000	12000-10800-9600-8400	30-40-50	≥80	Yes	14.3" x 9" x 7.8"	2
3660183	-	SSL-WP2T/LV/12V/PC	SSL, Low Voltage, 12V, Photocell (Button Type)								