

LED FIXTURE

RIGID Series



LED Commercial Downlight RGD-CDF

Designed to replace traditional CFL fixtures. Wide range of lumen packages and aperture sizes for every application. 120-347V auto-sensing driver. Flexible, multiple wattage and multiple Kelvin selection



5-year limited warranty


Operating temperature range -20 °C ~ +40 °C



Features & Benefits

- cETLus listed, Energy Star approved
- Switchable CCT (30K/35K/40K) and switchable wattage
- Range of sizes (4", 6", 8", 10" available)
- Die-cast aluminum body material, white Finish
- 24" flexible conduit w/ strain relief, 15" safety cable
- 0-10V dimming, high CRI (90+)
- Damp location rated

Dimensional Drawing

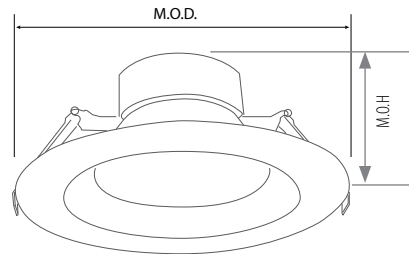

	Cut-out	M.O.D.	M.O.H.
RGD-CDF/4	3.75"	5.91"	3.5"
RGD-CDF/6	6.0"	8.29"	4.0"
RGD-CDF/8	7.5"	10.26"	4.25"
RGD-CDF/10	8.5"	11.28"	4.75"

Ordering Information Example: RGD-CDF/4/12W/MK9/120-347V/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish	Dimmable
RGD (Rigid)	CDF (Commercial downlight, flexible)	4 (4") 6 (6") 8 (8") 10 (10")	12W MW (Multiple wattage)	MK9 (Multiple CCT)	120-347V	WH (White)	D (0-10V Dimming)

Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	Beam Angle	CRI	Damp Location	M.O.D (inch)	Case QTY.
3662223	Yes	RGD-CDF/4/12W/MK9/120-347V/WH/D	12	120-347V	50,000	930	30-35-40	95°	≥90	Yes	5.91"	6
3662224	Yes	RGD-CDF/6/MW/MK9/120-347V/WH/D	10-12-17	120-347V	50,000	800-1000-1400	30-35-40	106°	≥93	Yes	8.29"	6
3662225	Yes	RGD-CDF/8/MW/MK9/120-347V/WH/D	14-17-20	120-347V	50,000	1200-1450-1750	30-35-40	106°	≥90	Yes	10.26"	6
3662226	Yes	RGD-CDF/10/MW/MK9/120-347V/WH/D	30-35-40	120-347V	50,000	2300-2700-3150	30-35-40	106°	≥90	Yes	11.28"	6