

# LED FIXTURE

**RIGID Series**



## LED Slim Panel RGD-SP2

LED slim panel 120V & 347V  
5 Multi-Kelvin selectable



5-year limited warranty


Operating temperature range -20 °C ~ +40 °C



### Features & Benefits

- cETLus listed, Energy Star
- Type IC rated – approved for direct contact with insulation
- Isolated internal driver in junction box – fast and easy to install
- 5 CCT colour selectable 2700/3000/3500/4000/5000K
- Finish color white (Interchangeable trim ring for black or brushed nickel finish)
- L70 @ 50,000 Hrs, CRI ≥90
- Triac dimmable, FT6 cable
- Wet location rated

### Dimensional Drawing

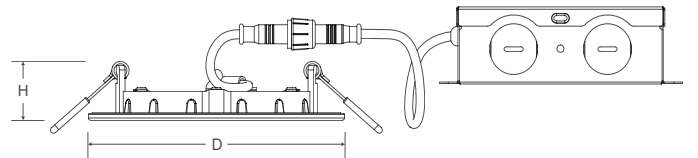

	M.O.D	Cut-out	M.O.H
<b>SP2/4 (4")</b>	4.92"	4"	1.04"
<b>SP2/6 (6")</b>	6.73"	6"	1.42"
<b>SP2/8 (8")</b>	9.10"	8"	1.42"

### Ordering Information Example: RGD-SP2/4/8W/5CCT/347V/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable	Options
RGD (Rigid)	SP2 (Slim panel)	4 (4") 6 (6") 8 (8")	8W 10.5W 24.5W	5CCT (27-30-35-40-50K selectable)	347V Blank (120V)	WH (White)	D (Triac dimmable) Blank (Non-dimmable)	Black trim ring Brush Nickel trim ring (Sell separately)

### Product Specification

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Wet Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662160	Yes	RGD-SP2/4/8W/5CCT/WH/D	8	120V	50,000	630	27/30/35/40/50	90	120°	Yes	Y	4.92" × 1.04"	6
3662163	Yes	RGD-SP2/6/10.5W/5CCT/WH/D	10.5	120V	50,000	930	27/30/35/40/50	90	120°	Yes	Y	6.73" × 1.42"	6
3664157	Yes	RGD-SP2/8/24.5W/5CCT/WH/D	24.5	120V	50,000	2100	27/30/35/40/50	90	120°	Yes	Y	9.10" × 1.42"	6
3682200	Yes	RGD-SP2/4/8W/5CCT/347V/WH	8	347V	50,000	630	27/30/35/40/50	90	120°	Yes	N	4.92" × 1.04"	6
3682201	Yes	RGD-SP2/6/10.5W/5CCT/347V/WH/D	10.5	347V	50,000	930	27/30/35/40/50	90	120°	Yes	Y	6.73" × 1.42"	6
3684200	Yes	RGD-SP2/8/24.5W/5CCT/347V/WH/D	24.5	347V	50,000	2100	27/30/35/40/50	90	120°	Yes	Y	9.10" × 1.42"	6
3660094	-	RGD-SP/4/CCT/BK	RIGID 4" slim panel, black trim ring										4.92"
3660095	-	RGD-SP/4/CCT/BN	RIGID 4" slim panel, brush nickel trim ring										4.92"
3662120	-	RGD-SP/6/BK	RIGID 6" slim panel, black trim ring										6.73"
3662121	-	RGD-SP/6/BN	RIGID 6" slim panel, brush nickel trim ring										6.73"
3664113	-	RGD-SP/8/BK	RIGID 8" slim panel, black trim ring										9.10"
3664115	-	RGD-SP/8/BN	RIGID 8" slim panel, brush nickel trim ring										9.10"
3660147	-	PL-AMP-MULTI-V	NC plate multiple hole plate 4"										-
3660060	-	PL-AMP6	NC hole plate 6"										-

