

LED FIXTURE

RIGID Series



LED Centre Basket RGD-CB2

120-347V LED auto-sensing driver
Multiple wattage and multiple kelvin selection



5-year limited warranty


Operating temperature range -20 °C ~ +50 °C



Features & Benefits

- cULus listed, DLC Premium
- Multiple wattage and multiple kelvin (CCT)
- PC (Poly carbonate) lens offers clean look and low glare
- Range of sizes (1'x4', 2'x2', 2'x4' available)
- High quality metal construction in white powder coat finish
- 0-10V dimming
- L70@ 100,000 Hrs, CRI≥80
- Damp location rated, Type IC

Dimensional Drawing

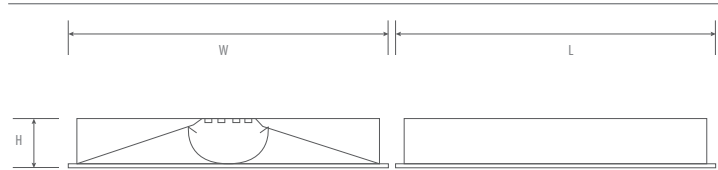

	L	W	H
2'x2'	23 3/4"	23 3/4"	2 3/4"
2'x4'	47 3/4"	23 3/4"	2 3/4"
1'x4'	47 3/4"	11 3/4"	2 3/4"

Ordering Information Example: RGD-CB2/14/MW/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable
RGD (Rigid)	CB2 (LED centre basket)	22 (2'x2') 14 (1'x4') 24 (2'x4')	MW (Multi Wattage)	MK (Multi Kelvin/CCT)	120-347V	D (0-10V dimming)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3664303	Yes	RGD-CB2/14/MW/MK/120-347V/D	30-25-20W	120-347V	100,000	3870-3125-2500	35-40-50	>80	11 3/4" x 47 3/4"	1
3664304	Yes	RGD-CB2/22/MW/MK/120-347V/D	30-25-20W	120-347V	100,000	3780-3125-2500	35-40-50	>80	23 3/4" x 23 3/4"	1
3664305	Yes	RGD-CB2/24/MW/MK/120-347V/D	45-38-34W	120-347V	100,000	5850-4750-4250	35-40-50	>80	23 3/4" x 47 3/4"	1