

LED FIXTURE

RIGID Series




LED Flush Mount-Slim PC RGD-FM Slim PC

LED slim PC round ceiling light
14", 5 Multi-Kelvin



5-year limited warranty

Operating temperature range -20° C ~ +40° C



5 CCT Colour Selectable

Features & Benefits

cETLus rated, Energy Star

14", CRI >80

5 CCT colour selectable 2700/3000/3500/4000/5000K


TRIAC dimmable

PMMA diffuser, white finish

L70@ 50,000 Hrs

Damp location rated

Dimensional Drawing

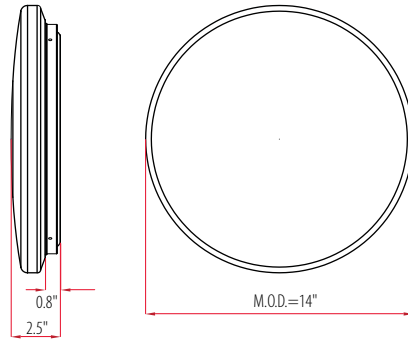

Ordering Information Example: RGD-FM14/24W/MK/D/SLIM/PC

Family Name	Fixture Type	Wattage	CCT (Kelvin)	Dimmable	Body
RGD (Rigid)	FM14 (LED 14" flush mount slim PC)	24W	MK (Multiple Kelvin)	D (Dimmable)	Slim/PC (Slim polycarbonate)

Product Specification

Ordering Code	Energy Star	Model Number	Description	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.D. (inch)	Case QTY.
3664155	Y	RGD-FM14/24W/MK/D/SLIM/PC	LED flush mount 14" 24W Multi-Kelvin polycarbonate	24	120	50,000	1800	27-30-35-40-50	80	Y	14	8