

# LED FIXTURE

**RIGID Series**



## LED 3" Downlight RGD-SMT

3" LED downlight, FT4 cable



5-year limited warranty

Operating temperature range -20 °C ~ +40 °C



with surface trim




with deep trim



### Features & Benefits

- cETLus rated, Type IC rated
- TRIAC/ ELV (10-100%) dimming, beam angle 38°
- 120V Input, PF>0.9
- Brush nickel, white or black trim
- 3000K (8W & 12W), DIM-to-warm 2000K-3000K(13W)
- High CRI (82+), CRI (95+) for 13W
- L70@50000 Hrs
- Damp location rated

### Dimensional Drawing

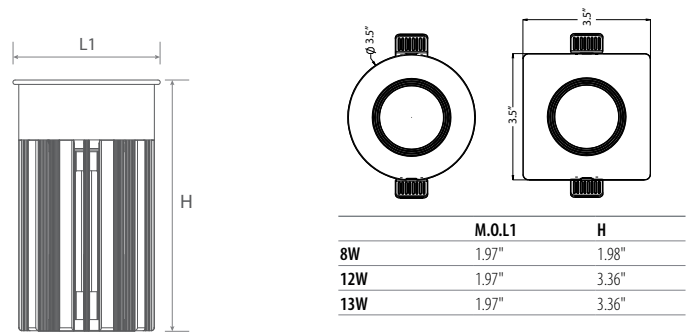

### Ordering Information Example: RGD-SMT/3/6W/30/120/38/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage (V)	Beam Angle	Dimmable	Trim
RGD (Rigid)	SMT (Module & driver, down light)	3 (3")	6W 8W 12W 13W	30 (3000K) DTW (2000K-3000K dim to warm, 13W)	120 (120V)	38 (38°)	D (TRIAC/ ELV (10-100%)) 13W, 2000K-3000K dim to warm	Refer to Chart

### Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Damp Location	Case Qty.
3662140	RGD-SMT/3/6W/30/120/38/D	RIGID 3" recess module & driver, down light, 6W, 30K, dimmable, FT4 Cable	8	120	50,000	480	3000	82	Yes	12
3662141	RGD-SMT/3/8W/30/120/38/D	RIGID 3" recess module & driver, down light, 8W, 30K, Dimmable, FT4 Cable	8	120	50,000	700	3000	82	Yes	12
3662142	RGD-SMT/3/12W/30/120/38/D	RIGID 3" recess module & driver, down light, 12W, 30K, Dimmable, FT4 Cable	12	120	50,000	1000	3000	82	Yes	12
3662143	RGD-SMT/3/13W/30/120/38/DTW	RIGID 3" recess module & driver, down light, 13W, 30K, Dim to Warm, FT4 Cable	13	120	50,000	820	2000-3000	95	Yes	12

# LED 3" Downlight RGD-SMT

Ordering Code	Model Number	Description	Wattage (W)	Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Damp Location	Case QTY.
3660127	RGD-SMT/531/BK	RIGID 3" Dia. black, adjustable trim, damp location, IP20, IC rated								40
3660098	RGD-SMT/531/BN	RIGID 3" Dia. brushed nickel, adjustable trim, damp location, IP20, IC rated								40
3660099	RGD-SMT/531/WH	RIGID 3" Dia. white, adjustable trim, damp location, IP20, IC rated								40
3660128	RGD-SMT/531/WP/BK	RIGID 3" Dia. black, fixed trim, wet location, IP65, IC rated								40
3660100	RGD-SMT/531/WP/BN	RIGID 3" Dia. brushed nickel, fixed trim, wet location, IP65, IC rated								40
3660101	RGD-SMT/531/WP/WH	RIGID 3" Dia. white, fixed trim, wet location, IP65								40
3660129	RGD-SMT/532/BK	RIGID 3" SQ. black, adjustable trim, damp location, IP20, IC rated								40
3660102	RGD-SMT/532/BN	RIGID 3" SQ. brushed nickel, adjustable trim, damp location, IP20, IC rated								40
3660103	RGD-SMT/532/WH	RIGID 3" SQ. white, adjustable trim, damp location, IP20, IC rated								40
3660130	RGD-SMT/532/WP/BK	RIGID 3" SQ. black, fixed trim, wet location, IP65, IC rated								40
3660104	RGD-SMT/532/WP/BN	RIGID 3" SQ. brushed nickel, fixed trim, wet location, IP65, IC rated								40
3660105	RGD-SMT/532/WP/WH	RIGID 3" SQ. white, fixed trim, wet location, IP65, IC rated								40
3660106	RGD-SMT/591/WH	RIGID 3" Dia. white, adjustable regressed open trim, damp location, IP20, IC rated								40
3660107	RGD-SMT/592/WH	RIGID 3" Dia. white, adjustable regressed pinhole trim, damp location, IP20, IC rated								40
3660108	RGD-SMT/593/WH	RIGID 3" Dia. white, adjustable regressed wallwash trim, damp location, IP20, IC rated								40
3660109	RGD-SMT/594/WH	RIGID 3" Dia. white, adjustable regressed slot hole trim, damp location, IP20, IC rated								40
3660152	RGD-SMT/591/INSERT/FB	RIGID 3" Dia., flat black reflector insert for SMT/591								40
3660153	RGD-SMT/591/INSERT/FS	RIGID 3" Dia., flat silver reflector insert for SMT/591								40
3660147	PL-AMP-MULTI-V	NC plate multiple hole plate								40



## Surface Trims

RGD-SMT/531 IP20



RGD-SMT/531 IP65



RGD-SMT/532 IP20



RGD-SMT/532 IP65



## Deep Trims

RGD-SMT/591



RGD-SMT/592



RGD-SMT/593



RGD-SMT/594

