

LED FIXTURE

SSL Series



LED Doorway Light SSL-DW2

Enhanced LED performance in a classic design
Multiple wattage and multiple kelvin selection



5-year limited warranty

Operating temperature range -40° C ~ +40° C



Features & Benefits

cULus listed, DLC Premium

120-277V

Switchable CCT (30K/40K/50K)

Junction box mounted


Die-cast aluminum with durable dark bronze coat finish

Photocell sensor installed

L70 @ 50,000 Hrs, CRI≥70

IP 65, wet location rated

Dimensional Drawing

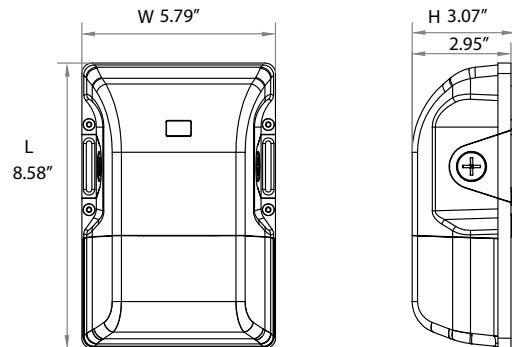

Ordering Information Example: SSL-DW2/15W/MK/UNV/PC/DB

Family Name	Fixture Type	Wattage	CCT	Voltage	Body	Finish
SSL (Solid state lighting)	DW2 (LED doorway light)	15W 26W 30L/MW (Max. 30W, Multi Wattage)	MK (Multi Kelvin/CCT)	UNV (120-277V)	PC (Polycarbonate)	DB (Dark bronze)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Wet Location	Dimension L×W×H(inch)	Case QTY.
3662157	-	SSL-DW2/15W/MK/UNV/PC/DB	15	120-277V	50,000	1950	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3664152	-	SSL-DW2/26W/MK/UNV/PC/DB	26	120-277V	50,000	3225	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10
3680102	Yes	SSL-DW2/30L/MW/MK/UNV/PC/PB	30-22-15	120-277V	50,000	3741-2750-1875	30-40-50	≥70	Yes	8.58 X 5.79 X 3.07	10